

IAFI¹

FURTHER UPDATES TO THE WORKING DOCUMENT TOWARDS A PRELIMINARY DRAFT NEW REPORT ITU-R M.[IMT.ATG]

Systems for non-safety air-ground communications (excluding UAS) using terrestrial IMT and other land mobile technologies

1 Introduction

During the 51st WP-5D meeting, the Working Document towards a Preliminary Draft New Report (PDNR) ITU-R M.[IMT.ATG] was further updated, including structural updates to the Working Document to classify Air-to-Ground (ATG) systems supported by IMT and other Land Mobile Systems (LMS).

2. Discussions

The working document towards a Preliminary Draft New Report (PDNR) ITU-R M.[IMT.ATG] includes the System characteristic of ATG Based on [3GPP TR 38.876 V18.2.0](#) (2024-06). In particular, Table 6-1 describes system parameters of an IMT-2020 base station supporting ATG operation as well as the related OBU parameters communicating with IMT-2020 base station are derived from 3GPP releases. In our view, this table should be validated by the 3GPP.

Further, the schematic diagram showing the ATG communications needs to be made clearer and editor's note regarding treatment of the scope and introduction section needs to be resolved.

3. Proposals

Through this contribution, IAFI proposes to send a Liaison Statement (LS) to 3GPP to seek their inputs on Table 6-1 which describes system parameters of an IMT-2020 base station supporting ATG operation as well as the related OBU parameters communicating with IMT-2020 Draft LS to 3GPP is attached, as **Attachment-1**, for consideration of the meeting.

Further, we have proposed a new introduction section by merging the scope and background paragraphs. In addition, the schematic diagram showing the ATG communications has been made more clear in the attached version of the Working Document in **Attachment-2**. Proposed changes are highlighted in **turquoise**

¹ IAFI is a sector Member of ITU-R. For more details, please see <https://iafi.in>.

Attachment-I

WORKING PARTY 5D (WP 5D)
DRAFT LIAISON STATEMENT TO 3GPP

WP 5D has commenced work on the development of a new ITU-R Report regarding “Systems for non-safety air-ground communications (excluding UAS) using terrestrial IMT and other land mobile technologies”.

To ensure that the Report accurately captures the state-of-the-art capabilities of terrestrial IMT and other land mobile technologies, Working Party 5D requests 3GPP to provide updated technical information. WP 5D, therefore, invites 3GPP to review and validate the technical data tables derived from 3GPP TR 38.876 V18.2.0 (2024-06) which describe system parameters of an IMT-2020 base station supporting ATG operation as well as the related OBU parameters communicating with IMT-2020 base station, and to provide any necessary updates or corrections. Working Document developed so far is also attached for reference.

The next meeting of WP 5D is scheduled to be held from 28th September to 8th October, 2026.

Status: For action.

Contact: TBD

E-mail: TBD

Attachment -2

Annex 3.4 to Working Party 5D Chair's Report

*WORKING DOCUMENT TOWARDS A PRELIMINARY
DRAFT NEW REPORT ITU-R M.[IMT.ATG]*

**Systems for non-safety air-ground communications (excluding UAS) using
terrestrial IMT and other land mobile technologies**

[Editor's note: meeting to decide how to merge scope and introduction.]

[Editor's note: This Report will not address regulatory aspects, frequency bands and/or spectrum]

TABLE OF CONTENTS

	<i>Page</i>
1 Introduction	3
2 Relevant ITU-R Recommendations and Reports	3
3 Abbreviation and Acronyms	4
4 Operational and technical characteristics of ATG supported by IMT technology	5
4.1 The role of IMT in air-ground communications	5
4.2 Operational characteristics of ATG supported by IMT technology	5
4.3/6 Technology aspects of ATG applied IMT technologies	6
4.4 Technical Aspect related to OBU	8
4.5 Industry and standardization activities on ATG supported by IMT	8
5 Operational and technical characteristics of ATG supported by other Land Mobile technologies	9
5.1 General description on air-to-ground communications	9
5.2 General ATG Operational characteristics of ATG supported by other LMS	10
5.3 Industry and standardization activities on ATG supported by other LMS	11
6 Challenge and future prospects on ATG	11
7 Examples of National implementation on ATG	12
X.Y Consideration of regulatory aspects	13
Annex 1 – Systems for public communications with aircraft in some countries in Region 1	14
A1.1 Broadband ATG systems within CEPT	14
A1.1.1 European Aviation Network	14
A1.1.2 ATG of the EAN system architecture	15
A1.1.3 ATG of EAN spectrum aspects	16

A1.1.4	User experience	16
A1.2	Broadband ATG systems within the Saudi Arabia	16
A1.2.1	Introduction	16
A1.2.2	ATG system architecture	16
A1.2.3	Spectrum aspects in Saudi Arabia	17
A1.2.4	ATG trial network and test flights in Saudi Arabia	17
Annex 2	– Systems for public communications with aircraft in some countries in Region 2	19
A2.1	System for public communications with aircraft in Canada and United States of America	19
A2.2	An example commercial aviation ATG system operating in the United States consistent with IMT-2000 CDMA	20
A2.2.1	Introduction	20
A2.2.2	System architecture	20
A2.2.3	Modifications to the IMT-2000 CDMA multi-carrier air-interface	21
A2.3	System for general aviation ATG radiotelephone within the United States of America	23
A2.3.1	General aviation ATG radiotelephone service	23
Annex 3	– Systems for ATG using terrestrial IMT and other land mobile technologies in some countries in Region 3	24
A3.1	ATG communication system based IMT-2020 in China	24
A3.1.1	Introduction	24
A3.1.2	Spectrum aspect in China	24
A3.1.3	Operational and technical aspects in China	25
A3.2	ATG communication system in Japan	26
A3.2.1	Background	26
A3.2.2	Descriptions of system architecture and communication equipment	26
A3.2.3	Verification tests and results	28

1 Introduction


This Report addresses non-safety Air-Ground (ATG) connectivity during an aircraft cruising phase only. This ATG connectivity refers to two-way communication between aircraft On-Board Unit (OBU) and ground station (GS)² using International Mobile Telecommunications (IMT) and other land mobile technologies. This Report covers ATG usages, technical and operational aspects and capabilities supported by IMT and other Land Mobile technologies. This Report does not address the communication links between the OBU and user equipment on-board the aircraft. Finally, the Annexes to this Report provide national / regional approaches in the planning and implementation of ATG in certain frequency bands that are allocated to the Land Mobile Service (LMS) or allocated to Mobile Service and identified for the IMT. These Annexes are not exhaustive and should be considered for informational purposes only.

The general description on ATG is shown in Figure 1 indicating ATG communication links between OBU and GS during an aircraft cruising altitude. The OBU includes an external antenna, typically mounted at the bottom of the aircraft to communicate with a terrestrial base station. The OBU enables on-board user equipment including but not limited to smartphones, laptops and tablets to access broadband communications.

:

FIGURE 1

ATG scenario

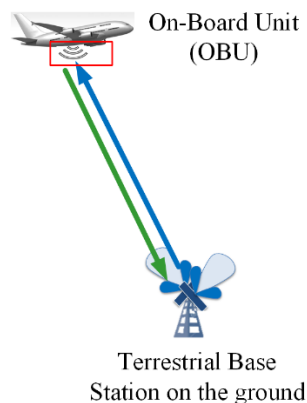

2 Relevant ITU-R Recommendations and Reports

ITU-R Recommendations

[M.1457](#) Detailed specifications of the terrestrial radio interfaces of International Mobile Telecommunications-2000 (IMT-2000)

[M.1645](#) Framework and overall objectives of the future development of IMT-2000 and systems beyond IMT-2000

² GS in the content of ATG refers to ground station communicating with OBU whether is refer to IMT or LMS base station.

[M.2012](#) Detailed specifications of the terrestrial radio interfaces of International Mobile Telecommunications Advanced (IMT-Advanced)

[M.2150](#) Detailed specifications of the terrestrial radio interfaces of International Mobile Telecommunications-2020 (IMT-2020)

[M.2160](#) Framework and overall objectives of the future development of IMT for 2030 and beyond

[

[P.525](#) Calculation of free-space attenuation

[P.528](#) A propagation prediction method for aeronautical mobile and radionavigation services using the VHF, UHF and SHF bands

]

ITU-R Report

[M.2282](#) *Systems for public mobile communications with aircraft*[*: If SG 5 suppresses the Report ITU-R M.2282-0, it can be removed from the section.*]

[If SG 5 suppresses the Report ITU-R M.2282-0, it can be removed from the section.]

ITU-T Recommendation

[Y.3211](#) Fixed, mobile and satellite convergence – Requirements of supporting airborne broadband communications for IMT-2020 networks and beyond

3 Abbreviation and acronyms

3GPP 3rd Generation Partnership Project

ACLR Adjacent Channel Leakage Ratio

AGL Above Ground Level

ATG Air-to-Ground, includes Air-Ground and A2G

CA Carrier Aggregation

CGC Complementary Ground Component

CST Communications, Space and Technology Commission (of Saudi Arabia)

DDR Data Rate Control

EAN European Aviation Network

EIRP Effective Isotropic Radiated Power, includes power and antenna gain

GNSS Global Navigation Satellite System

GS Ground Station (of ATG)

IMT International Mobile Telecommunications

ISD Inter-Site Distance

LMS Land Mobile Service

LOS Line-of-Sight

MSS Mobile-Satellite Service

OBU	On-Board Unit
RAN	Radio Access Network
SINR	Signal to Interference plus Noise Ratio
SUL	Supplementary Uplink
UAS	Unmanned Aircraft System

4 Operational and technical characteristics of ATG supported by IMT technology

4.1 The role of IMT in air-ground communications

Compared to earlier generations of cellular technologies, IMT (IMT-Advanced and IMT-2020) offers greater speed, lower latency, and the ability to connect more devices simultaneously, making it more suitable for delivering high-quality in-flight broadband services.

4.2 Operational characteristics of ATG supported by IMT technology

This section discusses the IMT specific characteristics relevant to ATG operations for aircraft that uses ground-based IMT cell towers to connect with an OBI. IMT, particularly the IMT-2020 (5G) standard, supports key ATG operational characteristics by adapting traditional cellular technologies to a high-speed, high-altitude environment. These characteristics are crucial for providing reliable in-flight connectivity for passengers

IMT-2020-based ATG networks are engineered to maintain characteristics not typically found in conventional cellular deployments.

The following are the key Operational Characteristics of both IMT-Advanced (4G) and IMT-2020 (5G³) which support ATG communication by addressing several unique operational challenges⁴.

4.2.1 High speed and extreme doppler shift

IMT-2020 terrestrial base station supports communication with OBU mounted on high speeds aircrafts, which can exceed speed of 1 200 km/hr. This extreme velocity causes a significant Doppler Frequency Shift, which can degrade signal quality. IMT-2020 technologies, like advanced channel modelling and demodulation algorithms, are designed to compensate for and mitigate this shift, ensuring the integrity of the communication link.

4.2.2 Large cell coverage and inter-site distance

Unlike dense terrestrial networks, ATG systems use large ground-based cells with an extended range, often exceeding 200 km. This is necessary to minimize the number of required cell sites for a vast, linear flight path. IMT-2020-based ATG networks maintain connectivity over these large inter-site distances (ISD).

³ IMT-generations are defined in Resolution [ITU-R 56](#) “Naming for International Mobile Telecommunications”.

⁴ See Recommendations ITU-R [M.1645](#), [M.2012](#), [M.2150](#), [M.2160](#) and Recommendation ITU-T [Y.3211](#).

4.2.3 Line-of-Sight (LOS) propagation

In contrast to ground-based networks where signals are often obstructed, the primary communication path for ATG is a LOS channel between the aircraft and the GS. This reduces multipath fading and improves signal reliability.

4.2.4 High capacity and enhanced data rates

Latest IMT technologies provide the high capacity needed to support the growing demand for in-flight broadband services. This includes support for high-throughput applications like video streaming and business communications. By incorporating techniques such as massive MIMO (Multiple-Input Multiple-Output (MIMO) and multi-user beam-forming, IMT-2020 systems can deliver faster data rates and higher spectral efficiency for ATG.

4.2.5 Coexistence and interference management

A critical operational requirement for ATG is the ability to operate in the same frequency bands as terrestrial mobile networks without causing harmful interference. IMT-2020 includes features and specifications for managing coexistence requirements between ATG and terrestrial networks, ensuring smooth and uninterrupted service for both.

4.2.6 Technology aspects for improving ATG connectivity

4.3/6 Technology aspects of ATG applied IMT technologies

This section includes the deployment and system parameters of terrestrial base stations, and the related parameters of On Board IMT (OBI) served by base stations.

4.3.1 System characteristic

Table 6-1 describes an example of system parameters of the ATG base station supporting IMT-2020 and the related parameters of OBI served by ATG base stations, respectively.

TABLE 6-1
An example of system parameters of ATG supported by IMT-2020

Parameter	ATG Base Station	OBI
Maximum RF output power	EIRP: 72.28 dBm (Including antenna gain)	EIRP: 35 dBm (Including antenna gain)
RF signal power bandwidth	Up to 100 MHz	Up to 100 MHz
Antenna station height above mean sea level	45-350 m	3-10 km
ACLR	45 dBc	33 dBc
Noise figure	5 dB	9 dB
Protection requirement	-115 dBm/MHz	-111 dBm/MHz
Mechanical up-tilt	15 degrees ⁵	

⁵ IMT-2020 AAS(Antenna Array system) base station vertical coverage range includes the mechanical up-tilt.

4.3.2 Deployment characteristic

The deployment scenario of the ATG system: During normal level flight, the aircraft operates at an altitude of 8-12 km. When the altitude of aircraft below 3 km, the OBU automatically shuts down the ATG communication system after catching the altitude data.

The deployment method of ATG base stations is as follows:

- Network deployment along flight routes, with an inter-station spacing of approximately 180 km.
- In densely populated areas, a cloverleaf (three-sector) mode is adopted, with an inter-station spacing of around 150 km.

4.4 Technical aspect related to OBU

The communication system between the OBU and user equipment onboard the aircraft can be configured to function as an indoor wireless access system (WAS) or radio local area network (RLAN), or as an IMT indoor network. This system is designed to operate only when the aircraft is in flight at its normal cruising altitude (approximately 3-10 km).


4.5 Industry and standardization activities on ATG supported by IMT

The IMT ATG system is being standardized by 3GPP, a global initiative that develops telecommunications standards. The most recent technical report, 3GPP [TR 38.876 V18.2.0](#), outlines the key specifications for ATG systems, including the use of IMT-2020 technology in this context. According to the report, the OBI (or ATG UE) is designed to function as customer premises equipment, which establishes and maintains the communication link between the aircraft and the terrestrial IMT base station. One of the primary challenges addressed by the 3GPP standards is the need to maintain a stable connection despite the high speeds and altitudes at which aircraft operate. To overcome this, IMT-2020 ATG systems make use of advanced techniques such as carrier aggregation, which allows multiple frequency bands to be used simultaneously, and seamless handover, which ensures that the connection remains uninterrupted as the aircraft moves between coverage areas.


From various EAN trials and commercial operation [<https://inflight.telekom.net/eau/>] of adapted LTE ATG solutions, the following characteristics are considered by the 3GPP for ATG network deployment scenarios.

- a) Extremely large inter-site distance (ISD) and large coverage range: In order to control the network deployment cost and considering the limited number of flights, large ISD is preferred, e.g., about 100 km to 200 km. At the same time, when the plane is above the sea, the distance between the plane and the nearest base station could be more than 200 km and even up to 300 km. Therefore, ATG network should be able to provide up to 300 km cell coverage range.
- b) Utilizing non-disjoint frequency for deploying both ATG and terrestrial networks, i.e. same operating band but ATG network and TN use adjacent carriers: Operators are interested to adopt the same frequency for deploying both ATG and terrestrial networks to save frequency resource cost, while interference between ATG and terrestrial networks becomes non-negligible and should be addressed.
- c) Much powerful on-board ATG terminal capacity: On-board ATG terminal can be much powerful than normal terrestrial UE, e.g., with higher EIRP via much larger transmission power and/or much larger on-board antenna gain.

ATG and Terrestrial IMT networks



Angle between ATG BS boresight and nearest TN BS boresight in azimuth – 0 degrees, 30 degrees and 60 degrees

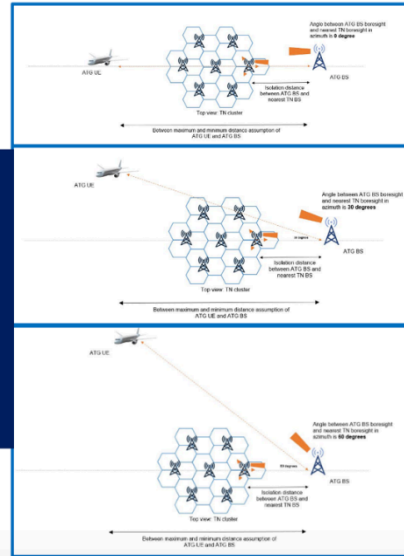

4.5.2/7.2.2 ETSI

Extensive studies have been carried out in Europe to identify suitable frequency band(s) for ATG systems, including 1 900-1 920 MHz, 2 010-2 025 MHz, 2 400-2 483.5 MHz, 3 400-3 600 MHz, and 5 855-5 875 MHz.

- ATG system identified in : This ATG system ~~was~~ is based on the LTE specifications, using paired spectrum of 2×10 MHz for frequency division duplex (FDD) operation. Trials were conducted in Germany within the 2.6 GHz FDD bands. The trial results demonstrated peak data rates of up to 30 Mbps in the downlink and 17 Mbps in the uplink.
- ATG system identified in : This ATG system was/is optimized to operate within the bands 2 400-2 483.5 MHz and 5 855-5 875 MHz, utilizing 20 MHz TDD spectrum or 2×10 MHz FDD spectrum. The air interface was/is based on OFDM. This system featured/features adaptive beamforming antennas and used/uses four separate phased array antennas at each ~~ground station~~ GS. Each phased array antenna ~~could~~ generates multiple spatially separated beams to serve the aircraft.
- Again, ATG system identified in : The system was/is designed to operate in the 5 855-5 875 MHz TDD band and ~~could~~ uses 5 MHz or 10 MHz bandwidth. The air interface was/is Universal Mobile Telecommunications System (UMTS) based on CDMA.

5 Operational and technical characteristics of ATG supported by other Land Mobile technologies

[Editor's note: The chapter should be checked and reviewed by WP 5A]

5.1 General description on air-to-ground communications

The terrestrial ATG system leverages current mobile wireless technologies for creating cellular network connectivity onboard aircraft through a special airborne equipment including an antenna mounted at the bottom of the aircraft. Some characteristics are considered for ATG, including large coverage range, high capacity of ATG terminal in aircraft and utilizing dedicated frequency bands for deploying ATG networks.

5.2 General ATG Operational characteristics of ATG supported by

The system should be fully compatible and capable of interfacing with the international public switched telephone network, public data network, the Internet, or any combinations thereof.

The system should have adequate bandwidth to meet the foreseeable demand for the services.

The Quality of Service should be that which meet the objectives of the system. For example, if the objective is to provide high quality voice service, then the Quality of Service should be comparable to that of the public switched network (voice and data).

The system should provide, in so far as possible, uninterrupted coverage throughout the designated service areas with the capability of coordinated operation across national borders.

The system needs to be electromagnetically compatible with other aircraft systems in accordance with appropriate regulatory requirements and should have minimal impact on aircraft engineering, maintenance and all aspects of flight operations.

The system should not cause harmful interference to other radio communication systems.

The key technical aspects of air-to-ground ~~air-ground~~ systems relate to:

- use of common wireless technology standards including characteristics (~~including~~ emission levels, receiver performance, and antenna characteristics) and equipment functionality (such as Doppler compensation, and auto-configuration based on geographic position-detection);
- harmonized spectrum utilization, including frequency bands and channel arrangements, to facilitate the free circulation and use of ATG between countries.

5.2.1 Systems inter-working

To facilitate seamless and transparent region-wide operations, regional agreement on a harmonised ~~air-to-ground~~ technology platform may be helpful to facilitate agreements between concerned administrations. The adoption of standards based broadband wireless access technologies for ~~air-to-ground~~ systems helps facilitate international harmonization operation for service operators and administrations.


In addition, to simplify in-air operations and maximise passenger usage experience, establishing harmonised emission levels/power flux densities, out-of-band emissions, and minimum antenna elevation levels facilitates seamless operation of terrestrial direct ~~air-to-ground~~ communications.

The antenna pattern and performance may be a particularly unique feature of ~~air-to-ground~~ links. In general, and to provide a reliable radiocommunications link with over-flying aircraft approaching/departing from all sky directions, both the airborne and ground antennas should exhibit an illumination pattern that varies with elevation-above-horizon:

- higher gain and linear (vertical) polarization for lower elevations between about 5-25° above horizon;
- lower gain and circular polarization for higher elevations between about 25-90° above horizon.

FIGURE 4

Example of antenna elevation angle versus polarization

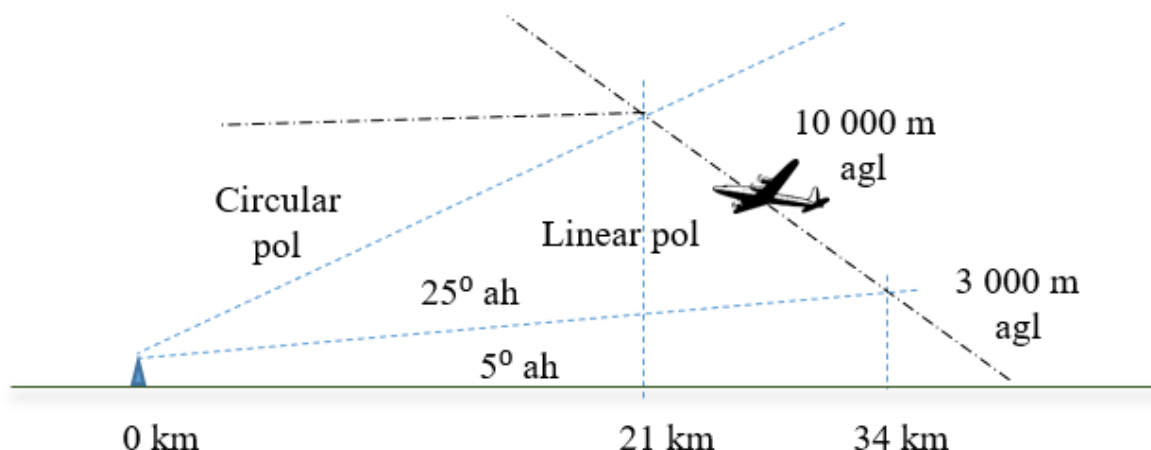

5.2.2 Technology aspects

Several technology aspects should also be considered for possible harmonization to ensure a uniform approach is applied to ATG systems:

- Doppler (due to airspeed) compensation – while determining airspeed and consequent Doppler compensation necessary for proper receiver operation can be achieved by computational means and GNSS data within the airborne equipment, an alternative approach is to take the airspeed indication directly from the aircraft avionics data bus, and apply it as a frequency scaling correction factor;
- altitude detection – aircraft operator may use altitude information automatically derived from the aircraft avionics data bus to enhance and provide timely safety information to the passengers in the aircraft cabin (e.g., to fasten seat belts);
- geo-position detection – this information may be required for purposes of implementing particular national regulatory requirements, by matching against aircraft position against geographic national border location information. While this can also be derived directly from GNSS data, it is also available from the aircraft avionics data bus.

5.3 Industry and standardization activities on ATG supported by other LMS

Extensive studies have been carried out in Europe to identify suitable frequency band(s) for ATG systems, including 2 400-2 483.5 MHz and 5 855-5 875 MHz.

ATG system identified in [ETSI TR 101 599](#): this ATG system was optimized to operate within the bands 2 400-2 483.5 MHz and 5 855-5 875 MHz, utilizing 20 MHz TDD spectrum or 2 × 10 MHz FDD spectrum. The air interface was based on OFDM. This system featured adaptive beamforming antennas and used four separate phased array antennas at each ground station. Each phased array antenna could generate multiple spatially separated beams to serve the aircraft.

6 Challenge and future prospects on ATG

Despite the significant progress made in the development of IMT-advanced and IMT-2020 ATG systems, several challenges remain. One of the primary concerns is the availability of spectrum for ATG communications. As more devices and services compete for access to radio frequencies, ensuring that there is sufficient bandwidth for high-speed in-flight connectivity will be crucial. Another challenge is the cost of deploying ATG infrastructure. Installing base stations capable of

communicating with aircraft (except UAS) at high altitudes requires significant investment, particularly in rural or remote areas where existing infrastructure may be lacking. Looking to the future, the continued development of IMT-2020 and beyond-IMT-2020 technologies promises to further enhance the capabilities of ~~air-to-ground~~ communication systems. With the potential for faster data rates, lower latency, and greater network reliability, these technologies will play a key role in meeting the growing demand for in-flight connectivity in the coming decades.

7 Examples of National implementation on ATG

Technical characteristics and operational features of the systems for ATG in some countries in Region 1 are given in Annex 1.

Technical characteristics and operational features of the systems for ATG in some countries in Region 2 are given in Annex 2.

Technical characteristics and operational features of the systems for ATG using terrestrial IMT and other land mobile technologies in some countries in Region 3 are given in Annex 3.

Channel propagation effects on a terrestrial ~~air-to-ground~~ system are given in Recommendation ITU-R P.528-3 — ~~Propagation curves for aeronautical mobile and radionavigation services using the VHF, UHF and SHF bands~~, which provides useful information for design of systems for public mobile communications with aircraft.

Note: The Annexes are provided by individual administrations and/or regional or sub-regional organisations for information purposes only, and do not create any obligation on other administrations to follow those implementations described in Annexes.

[

[Editor's note: it should be discussed to which extent this Report should address the compatibility and regulatory aspects noting that these issues have a great impact on the practical deployment of non-safety communications between base stations on ground and airborne user equipment supported by the terrestrial component of IMT.]

It is generally understood that this Report is not intended to development of the regulation conditions for ATG. Based on the national experience the choice of specific frequency bands/ allocations as well as regulation are made at the national levels. Since ATG operations at this moment are mainly designed for operation within national territories of the countries which authorized such use the EMC considerations are limited to services and applications under responsibility of national administrations. However, it is also understood that these national systems should avoid any interference impact to the neighbouring countries.

In the case of international implementation of ATG involving territories more countries or massive implementation some regulatory approaches may be relevant to consider in the future. Such regulatory and operational considerations might be necessary to identify possible measures to avoid interference to the services and application in the countries involved and possible other neighbouring countries, such as harmonized frequency ranges, areas of operation, authorization aspects, etc.

The appropriate text to describe the current situation on this matter taking into account this EN should be reflected in the current version of this Report]

X.Y Consideration of regulatory aspects

The use of non-safety communications between base stations on ground and airborne user equipment supported by the terrestrial component of IMT should not contradict the Radio Regulations.

Since this communication link involves user equipment on-board airborne vehicles such communication falls into definition related to aeronautical mobile service. In particular:

1.32 *aeronautical mobile service: A mobile service between aeronautical stations and aircraft stations, or between aircraft stations, in which survival craft stations may participate; emergency position-indicating radiobeacon stations may also participate in this service on designated distress and emergency frequencies.*

1.81 *aeronautical station: A land station in the aeronautical mobile service.*

In certain instances, an aeronautical station may be located, for example, on board ship or on a platform at sea.

1.83 *aircraft station: A mobile station in the aeronautical mobile service, other than a survival craft station, located on board an aircraft.*

Based on that the basic regulatory scenario of the use of such links should be related to IMT systems deployed in the bands allocated to aeronautical mobile service. It should be noted that not all the bands identified for IMT have allocation to aeronautical mobile service. Therefore, before the deployment of non-safety communications between base stations on ground and airborne user equipment the relevant compatibility studies should be performed to allow such use in some IMT bands. Situation in the IMT bands already allocated to AMS may be more favourable comparing to other bands.

Otherwise, such use should follow provision 4.4 of the Radio regulations:

4.4 Administrations of the Member States shall not assign to a station any frequency in derogation of either the Table of Frequency Allocations in this Chapter or the other provisions of these Regulations, except on the express condition that such a station, when using such a frequency assignment, shall not cause harmful interference to, and shall not claim protection from harmful interference caused by, a station operating in accordance with the provisions of the Constitution, the Convention and these Regulations.

To follow the principle “shall not cause harmful interference to, and shall not claim protection from harmful interference” may lead to limitation of deployment of such links within national territories at the appropriate distances from border of other countries unless agreement between the concerned administrations,

[Editor’s note: it should be discussed to which extent this Report should address the compatibility and regulatory aspects noting that these issues have a great impact on the practical deployment of non-safety communications between base stations on ground and airborne user equipment supported by the terrestrial component of IMT.]

]

Annex 1

Systems for public communications with aircraft in some countries in Region 1


[Editor's note: The chapter should be checked and reviewed by WP 5A]

1 ~~Broadband air-to-ground (ATG) systems within the European Conference of Postal and Telecommunications (CEPT⁶)~~

1.1 European Aviation Network

The European Aviation Network (EAN) provides aerial broadband coverage across all 27 EU states and Switzerland, United Kingdom and Norway. As shown in Fig. A1-1 below, EAN is a hybrid system, with a (MSS) path and a broadband ATG terrestrial path configured for every aircraft. For the latter, a total of 300 Base Stations (BSs) have been deployed across the European continent.

FIGURE A1-1
European Aviation Network

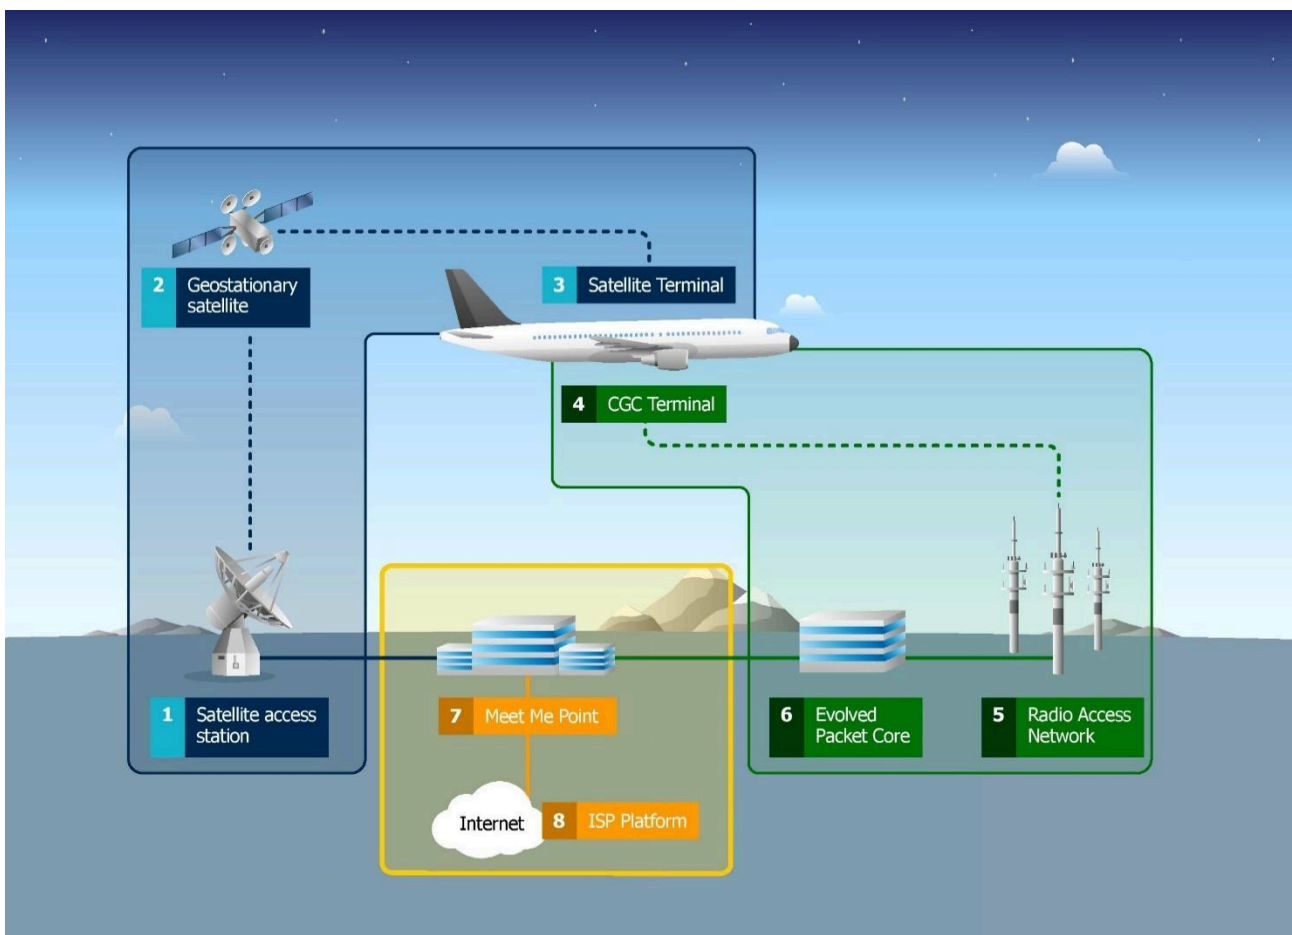

NOTE – This Report only addresses the link between Base station on the ground and OBU/CGC terminal. The other portions of the figure are not relevant to this Report.

⁶ The European Conference of Postal and Telecommunications

1.2 ATG of the EAN system architecture

The broadband ATG system is a complementary ground component of EAN and is based on 3GPP + specifications. In particular, synchronization algorithms of the OBU were modified compared to terrestrial mobile radio usage in order to cope with the high Doppler frequency shift caused by aircraft speed, and the Tx power was increased to enable very large cell sizes. In addition, the Ground Station (GS) antenna adjustment was matched to cover typical aircraft altitudes between 3 and 12 kilometres by adaptation of vertical diagrams including antenna up-tilt.

The major building blocks of the ATG radio link of the EAN system architecture are:


- broadband ATG network infrastructure on-board aircraft, e.g., OBU, interface to on-board network(s), external antenna, cabling;
- terrestrial radio access network for broadband ATG, consisting of BS that are configured with special ATG radio heads and antennas to establish high-performance radio links to aircraft. These GSs are deployed on elevated sites with clear line of sight to the horizon and are furnished with broadband backhaul links.

The other major building blocks of the ATG of the EAN system architecture are listed below, but are out scope of the report:

- service access network infrastructure on-board the aircraft, e.g., Wi-Fi coverage and Mobile Communications on board Aircraft (MCA), both already standardized and certified for on-board implementation;
- dedicated mobile core network for session, mobility, subscriber and security management providing IP connectivity to external packet data networks (e.g., intranet, Internet, IP Multimedia Subsystem (IMS));
- central network components required for O&M, billing, etc. in the ATG network;
- various IP-based service delivery platforms, e.g., for passenger services or for airline or aircraft repair/manufacturer internal applications.

FIGURE A1-2

System architecture for the broadband ATG of the EAN system

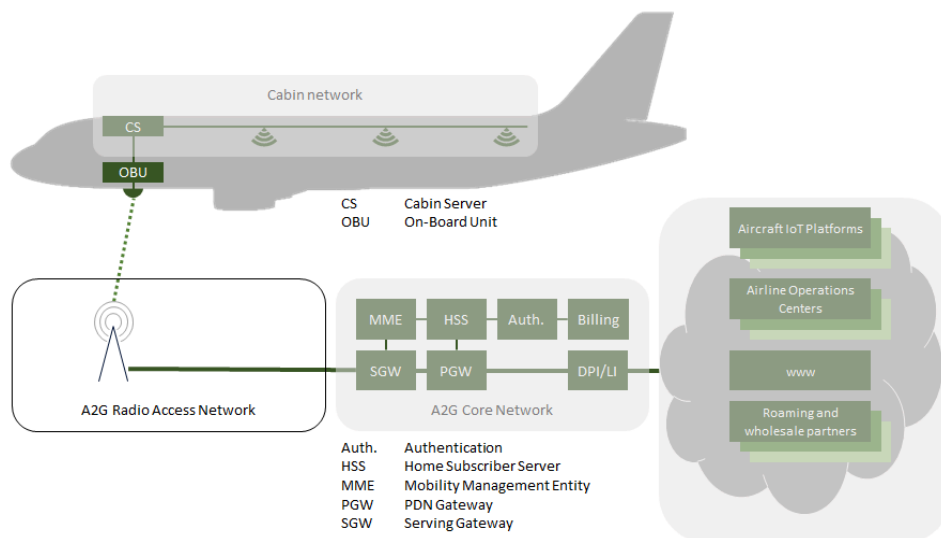

NOTE – This Report only addresses the link between Base station on the ground and OBU/CGC terminal. The other portions of Fig. A1-2 are not relevant to this Report.

1.3 ATG of EAN spectrum aspects

EAN has been licenced by European countries under their national regulations to provide public communications with commercial aircraft operated within the European airspace. The authorisations are based on and applicable EC Decisions that designates the frequency bands 1 980-2 010 MHz and 2 170-2 200 MHz for use by systems in the ~~Mobile-Satellite Service~~ including those supplemented by a ~~Complementary Ground Component (CGC)~~. Paired spectrum of 2×15 MHz has been licenced for the operation of EAN.

1.4 User experience

EAN is in live commercial operations since 2018. The system reset the benchmark for connectivity in the skies with regards to capacity, latency, per-aircraft throughput, network densification flexibility, aircraft retrofit time, aircraft retrofit cost, and cost per bit.

Key properties of the ATG of the EAN system include:

- the radio link between the BS and the OBU in the aircraft is established at distances of up to 150 kilometres from the sites to the aircraft, with aircraft flying at speeds up to 1 200 km/h and altitudes up to 12 000 metres;
- peak data rates of up to 100 Mbit/s in the forward link (ground-to-air) and 30 Mbit/s in the reverse link (air-to-ground), as well as round-trip times of less than 50 milliseconds are consistently being achieved;
- cell ranges are designed in consideration of local air traffic densities, spanning from 30 kilometres around the major aviation hubs to 150 kilometres in sparsely flown areas;
- the traffic mix is dominated by streaming applications and messaging applications, thus the user behaviour resembles that of terrestrial services.

2 Broadband ~~Air-to-Ground~~ (ATG) systems within the Saudi Arabia

2.1 Introduction

A broadband ~~air-to-ground~~ (ATG) system constitutes an application for various types of telecommunication services, such as Internet access and mobile multimedia services, during flights. It aims to provide access to broadband communication services during domestic and regional flights. With 200 million air passengers annually, the Middle East is one of the largest aviation markets and home to some of the largest airlines worldwide.

The main application field is Air Passenger Communications (APC). In addition, a broadband ATG system can also support Airline Administrative Communications ~~services~~ (AAC) and thus improve aircraft operation. Safety-relevant communications such as Air Traffic Control (ATC) and related services are not intended to be covered.

2.2 ATG system architecture

The ATG system is based on 3GPP LTE Rel. 10+ specifications. In particular, synchronization algorithms of the OBU are modified compared to terrestrial mobile radio usage in order to cope with the high Doppler frequency shift caused by aircraft speed, and the Tx power is increased to enable very large cell sizes. In addition, the GS antenna adjustment is matched to cover typical aircraft altitudes between 3 and 12 kilometres by adaptation of vertical diagrams including antenna up-tilt.

The major building blocks of the ATG system within Saudi Arabia are the same as those listed in section 1.2 and shown in Fig. A1-2.

2.3 Spectrum aspects in Saudi Arabia

In April 2021, the Communications, Space and Technology Commission (CST) of Saudi Arabia has launched its Spectrum Outlook for Commercial and Innovative Use 2021-2023⁷. The spectrum outlook details Saudi Arabia's path to becoming a world leader in radiocommunication and wireless technologies by attracting investments, meeting current data and connectivity demands, and proactively anticipating future needs. Correspondingly in this outlook, CST aims to leverage innovation in spectrum management by expanding its range of resources and services, while ensuring the digital ecosystem is ready to unlock its full potential. Drafting this outlook followed a transparent and collaborative process that involved public consultation and engagement with more than 65 wireless technology organizations from different 20 countries. The broad aim of this Spectrum Outlook is to adopt a range of measures to provide transparency and predictability for all spectrum users in the Kingdom, providing spectrum users certainty over the amount of spectrum available in different bands. One of these measures referred to the release of the bands 1 980-2 010 MHz and 2 170-2 200 MHz in a technology-neutral auction in 2021, which acknowledges industry interest to deploy a ATG system in these bands. Such a system would be compatible with the ATG component of the European Aviation Network, which already provides aerial broadband coverage across 30 European states.

2.4 ATG trial network and test flights in Saudi Arabia

In 2018, Saudi Arabia was the first country in the Middle East to deploy a ATG system for trial purposes. A total of 10 ATG BSs and a dedicated ATG core network were deployed to cover the air routes between Riyadh and Jeddah, which is the busiest city pair with regards to domestic air travel.

The system architecture of the ATG trial system was a subset of the system architecture described above and resembled the ATG system architecture of EAN, including the same bands 1 980-1 995 MHz and 2 170-2 185 MHz for FDD operation. A test aircraft was equipped with Wi-Fi access network infrastructure and ATG network infrastructure (OBU) and flown for 10 000 kilometres on different routes between Riyadh and Jeddah during a structured flight test campaign.

Key results of the trial included:

- downlink (ground-to-aircraft) throughput above 90 Mbit/s and uplink (aircraft-to-ground) throughput above 30 Mbit/s;
- round trip time (RTT) of less than 50 milliseconds;
- various high-bandwidth-low-latency applications demonstrated, e.g., video conferencing, OTT video, social networking, and enterprise applications with VPN;
- live high-definition video conference between the test aircraft and an exhibitor's booth at the exhibition in Dubai;
- maximum distance between BS and aircraft 120 kilometres.

In 2022, a first regular commercial aircraft of an airline (Airbus A321) was equipped with a ATG system and received certification by the General Authority of Commercial Aviation. Flight test results were consistent with the results of the trial in 2018. The aircraft was not dedicated to a test campaign but flew on its regular route schedule and automatically connected to the network whenever reaching the coverage area. The results were publicly shared at the "" event, that was organized by ITU and CST.

⁷ [Spectrum Outlook for Commercial and Innovative Use 2021-2023, CST \(2021\).](#)

Annex 2

Systems for public communications with aircraft in some countries in Region 2

[Editor's note: The chapter should be checked and reviewed by WP 5A]


1 System for public communications with aircraft in Canada and United States of America

In Canada⁸ and the United States of America⁹, the band pair 849-851 MHz and 894-896 MHz is allocated to the aeronautical mobile service for public correspondence with aircraft. These bands are designated for paired nationwide exclusive assignment to the licensee or licensees of systems providing radio telecommunication services, including voice telephony, broadband Internet and data transmission service, to persons on-board aircraft. However, fixed services and ancillary land mobile services are not permitted.

In Canada and the United States of America, the band plan, described below in Fig. 5, is based on two block pairs: 849-850.5/894-895.5 MHz and 850.5-851/895.5-896 MHz. The band 849-851 MHz is limited to transmissions from ground stations and the use of the band 894-896 MHz is limited to transmissions from airborne stations.

FIGURE 5

The band plan for aeronautical mobile service in Canada and the United States

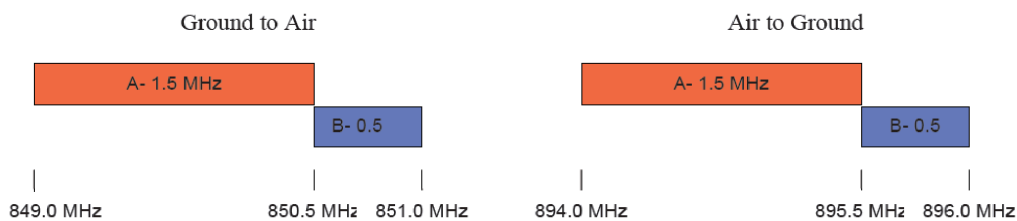

The technical rules for certification and systems deployment in the band in the United States and Canada are technology neutral. The maximum effective radiated power (e.r.p.) limits for ground stations and airborne stations are as follows:

Ground station	500 W e.r.p.
Airborne station	12 W e.r.p.

In the United States of America, the air-to-ground radiotelephone service falls under the U.S. Federal Communications () rules, . Commercial aviation air-ground systems may use any type of emission or technology that complies with these technical rules.

⁸ Refer to <http://www.ic.gc.ca/eic/site/smt-gst.nsf/eng/sf09134.html>.

⁹ Refer to: <http://www.gpo.gov/fdsys/pkg/CFR-2010-title47-vol2/pdf/CFR-2010-title47-vol2-part22-subpartG-subjectgroup-id140.pdf>.

2 An example commercial aviation air-to-ground system operating in the United States consistent with IMT-2000 CDMA multi-carrier as described in Recommendation ITU-R M.1457

2.1 Introduction


This air-to-ground system is currently deployed and operational in continental United States and part of Alaska¹⁰ (see <http://www.gogoair.com>). It operates in the 849-850.5 MHz and 894-895.5 MHz bands and offers in-flight broadband services to all Wi-Fi enabled laptops, notebooks and smartphones. It uses a modified version of the IMT-2000 CDMA¹¹ Multi-Carrier network to provide a high-speed connection directly from the aircraft to the ground. Some of the characteristics features of this network are: high capacity of 300 kbit/s to 500 kbit/s with peak rates of 3.1 Mbit/s, very large cell size (up to 400 km radius), modifications made to the IMT-2000 CDMA Multi-Carrier 1xEV-DO air interface to accommodate extended cell coverage and airplane speed, deployment using off the shelf components such as Radio Access Networks (RANs) and Radio Network Controllers (RNCs).

2.2 System architecture

The overall end-to-end system architecture of this air-to-ground system is illustrated in Fig. 6.

FIGURE 6

IMT-2000 CDMA multi-carrier air-to-ground system network architecture

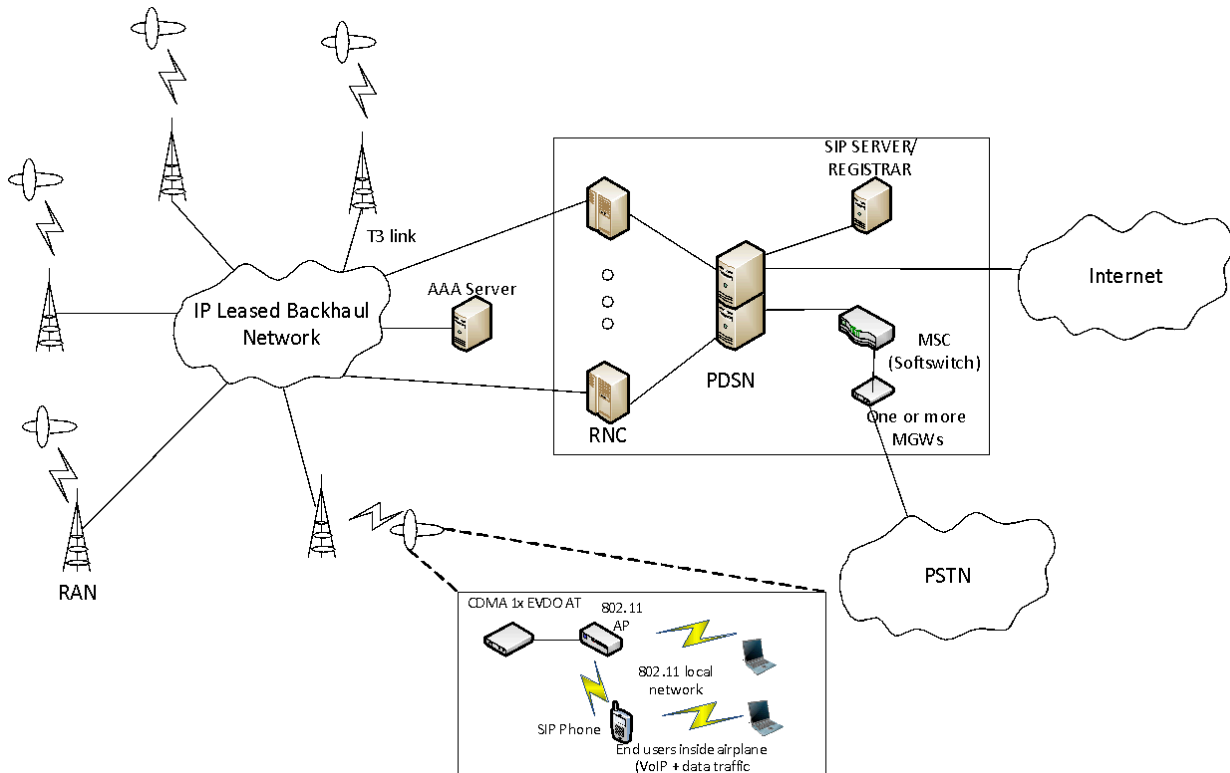

¹⁰ <http://www.gogoair.com>.

¹¹ CDMA2000 High Rate Packet Data Interface Specifications, Version 1.0, March.

NOTE – This Report only addresses the link between Base station on the ground and aeronautical terminal. The other portions of Fig. 6 are not relevant to this Report.

Each Radio Access Network (RAN) supports 1 carrier and 6 sectors. Each sector can generate about 2.2 Mbit/s peak throughput.

2.3 Modifications to the IMT-2000 CDMA multi-carrier air-interface

The following sections describe the various enhancements made to the IMT-2000 CDMA multi-carrier 1xEV-DO air interface in order to enable its application as a viable air interface technology for air-to-ground communication.

2.3.1 Expanded range of Doppler shifts

Airplanes travel at speeds far greater than is usual for the operation of cellular mobile units, including high speed trains. For the worst-case orientation of a plane traveling at 340 m/s and at a carrier frequency of 850 MHz, the Doppler frequency shift seen by the airborne access terminal is approximately 964 Hz. When the terminal transmits, the Doppler shift perceived by the base station is approximately doubled to 1 928 Hz. The different searching operations at both the base station and the access terminal needed to be modified to accommodate the extended range of the observed Doppler shifts.

At the base station, the access channel searching algorithm is extended to additional frequency bins that cover the expected Doppler range of the airborne system. Furthermore, in case of handoff searching, when a sector gets added to the access terminal's (AT) active set, the newly added sector needs to search and start demodulating the AT's signal. However, the newly added sector may not be managed by the same base station that was already demodulating the access terminal, and hence the new base station needs to perform the same search procedure that is used for the access channel. When the access terminal tracks one sector and monitors other sectors for handoff, there could be a frequency offset differential due to different Doppler shifts between the serving sector and the candidate sectors. This means that there is an underestimation of the true SINR of the candidate pilot, because the SINR estimator suffers from phase coherence loss due to frequency error. SINR estimation for non-serving sectors needs to be compensated using estimates of Doppler frequency shifts.

2.3.2 Expanded cell radius

The airborne system supports cell radii of up to 400 km. The cell radii for a typical terrestrially-based cellular system are in the order of a few kilometres. In order to cope with large cells, modifications to the baseline reverse link demodulation algorithms are needed. A larger traffic search window is required to search for multipath components, and the multipath search window is extended to 256 chips. The reasoning for this is that the existence of strong multipath components is much more unlikely in the airborne system than in typical terrestrial cellular systems due to radio propagation conditions. Nevertheless, if a signal multipath component were to exist, then the lag difference between the main line-of-sight path and the multipath will most likely be much greater than the few chips (normally less than 10) that is typical in terrestrial communications. For this reason, the search window sizes should be extended to 256 chips, corresponding to ~64 kilometres. Furthermore, due to larger cell radii as compared to the conventional terrestrial cellular systems, a much bigger access channel search window is required. If the cell radius is assumed to be R km, then the maximum possible time of arrival difference between two airplanes inside the cell (measured in chips) is given by the following equation.

$$\Delta = 2R * 10^3 \frac{1.2288 * 10^6}{c}$$

where c is the speed of light in m/s. For $R = 400$ km, we obtain $\Delta \sim 3\,333$ chips. This quantity is how large the total access channel search window needs to be.

Changes to some search parameters are also needed on the AT side to support large cell radii. In order for the AT to find neighbouring sectors and correctly perform active and candidate set management, the neighbour search windows have to be increased. This is because with large cell radii, the differential delay between the serving sector and transmissions from candidate sectors can be quite large. Given the geometry of the network, it should be sufficient for the neighbour search windows to be expanded by a factor of 8, and this can be accomplished by reinterpreting the search window size field in the neighbour list message¹².

Additional changes need to be made for increasing the data rate control (DRC) length. In the IMT-2000 CDMA multi-carrier 1xEV-DO system, the access terminal continuously sends its desired forward link data rate on the DRC to the base station. The DRC word can extend 1, 2, 4 or 8 reverse link slots. Right after the access terminal has finished sending a given DRC, it expects that the next forward link slot directed to it will be encoded according to its last DRC request.

The reverse link timing of the DRC channel is advanced by one-half slot with respect to the forward link timing for the base station to allow the base station enough time to process the last DRC sent by each AT. This 1 024-chip budget is more than enough for regular terrestrial communications since the cell radii are of the order of a few km. However, for the airborne system, this is insufficient since the one-way propagation delay to the edge of a base station covering 250 kilometres is already around 1 024 chips. The solution lies in choosing a long DRC length and, at the base station side, decoding the DRC word before the whole length of it has been received.

2.3.3 Handoff

The IMT-2000 CDMA Multi-Carrier 1xEV-DO airborne system uses multiple transmit and receive antennas on the access terminal side. The system uses four antennas, two sets of cross-polarization pairs. The access terminal has two antenna ports and a switch matrix to control multiplexing of the four antenna inputs into the two antenna ports on the access terminal. To provide spatial diversity in demodulation of the serving sector, the system combines the two antenna inputs belonging to the best or strongest polarization. Occasionally, the access terminal needs to search other antenna ports for possible transmissions from other sectors. To do so without breaking the connection to the serving sector, the access terminal effectively switches to single antenna demodulation. At the same time, the antenna port connected to the antenna with weaker input is switched to other antenna inputs to search for pilot transmissions from sectors on the AT's neighbour list. When this brief search is done, the AT resumes dual antenna demodulation.

The purpose of the IMT-2000 CDMA multi-carrier 1xEV-DO airborne system handoff procedure is to ensure that the access terminal is communicating with the access network (AN) through the best or strongest serving sector while using its best polarization pair of antennas for forward link demodulation. At the same time, the access terminal should transmit on the reverse link using its best antenna in orientation and polarization. The complexities of the airborne handoff procedure arise from the fact that as the serving sector changes, so does the concept of best antennas on the forward and reverse links.

¹² Refer to <http://www.ic.gc.ca/eic/site/smt-gst.nsf/eng/sf09134.html>, § 9.7.6.2.5.

3 System for general aviation air-to-ground radiotelephone within the United States of America

3.1 General aviation air-to-ground radiotelephone service

This service operates in the 454-459 MHz band and can provide a variety of telecommunication services to private aircraft such as small single engine planes and corporate jets. CFR47¹³ § 22.805 contains the channel allocations for the general aviation air-to-ground service. These channels have a bandwidth of 20 kHz and are designated by their centre frequencies in megahertz.

TABLE 1
Signalling channel pair for general aviation air-ground systems

Ground	Airborne mobile
454.675	459.675

- a) Channel 454.675 MHz is assigned to each and every ground station, to be used only for automatically alerting airborne mobile stations of incoming calls.
- b) All airborne mobile channels are assigned for use by each and every airborne mobile station.

Communication channel pairs

Ground (MHz)	Airborne mobile (MHz)
454.700	459.700
454.725	459.725
454.750	459.750
454.775	459.775
454.800	459.800
454.825	459.825
454.850	459.850
454.875	459.875
454.900	459.900
454.925	459.925
454.950	459.950
454.975	459.975

The transmitting power of ground and airborne mobile transmitters operating in the general aviation air-ground radiotelephone service on the channels listed in CFR 47 § 22.805 must not exceed:

- a) Ground station transmitters: the effective radiated power of ground stations must not exceed 100 Watts and must not be less than 50 Watts, except as provided in .
- b) Airborne mobile transmitters: the transmitter power output of airborne mobile transmitters must not exceed 25 Watts and must not be less than 4 Watts.

¹³ Refer to:

<http://www.gpo.gov/fdsys/pkg/CFR-2010-title47-vol2/pdf/CFR-2010-title47-vol2-part22-subpartG-subjectgroup-id140.pdf>.

Annex 3

Systems for ATG using terrestrial IMT and other land mobile technologies in some countries in Region 3

[Editor's note: The chapter should be checked and reviewed by WP 5A]

1 Air-to-ground communication system based IMT-2020 in China

1.1 Introduction

On 6 January 2020, the focus of the 2020 National Civil Aviation Work Conference clearly required “to strengthen smart civil aviation research and accelerate the promotion and application of new technologies”. The development of ATG service needs the cooperation of basic service resources such as wireless spectrum, BS address and transmission network. In order to effectively save spectrum resources, make full use of wireless network resources of operators, and reuse existing frequencies with ground mobile communication service, the appropriated choice is to carry out ATG ground-air communication service.

Meanwhile, according to the 2017 Statistical Bulletin on the Development of the Civil Aviation Industry issued by the Civil Aviation Administration of China in May 2018, the passenger traffic volume of the whole industry in 2017 was 551.56 million, an increase of 13.0% over the previous year, and the passenger traffic volume of domestic routes was 496.11 million, an increase of 13.7% over the previous year. It is estimated that the number of domestic air passengers will exceed 1.2 billion in 2025, as shown in Table A2-1.

TABLE A2-1

Forecast of civil aviation broadband communication in China

Year	2020	2021	2022	2023	2024	2025
Number of Civil aircraft	4 039	4 524	5 067	5 675	6 356	7 118
Passenger (Million)	69.312	77.630	86.645	97.379	109.064	122.152


1.2 Spectrum aspect in China

The candidate frequency bands currently planned for ATG system are 1.9 GHz for ATG Uplink; 3.5 GHz for ATG Downlink in China.

ATG network architecture and interference scenarios are shown in Figure A2-1. In ATG network, ATG ground BSs are deployed to provide connectivity for aircraft. As seen in Figure A2-1, downlink (DL) of ATG system is defined as a communication link from base station on the ground to OBU of the aircraft. Moreover, regarding aircraft aspects, it can be seen as mobile terminals in ATG network, mainly operates/ approximately up to 10 km in the altitude level/. Possible interference scenario between ATG DL and fixed-satellite service (space-to-Earth) can be considered; while other interference scenarios is for further study.

FIGURE A2-1

An example of ATG network architecture and interference scenarios

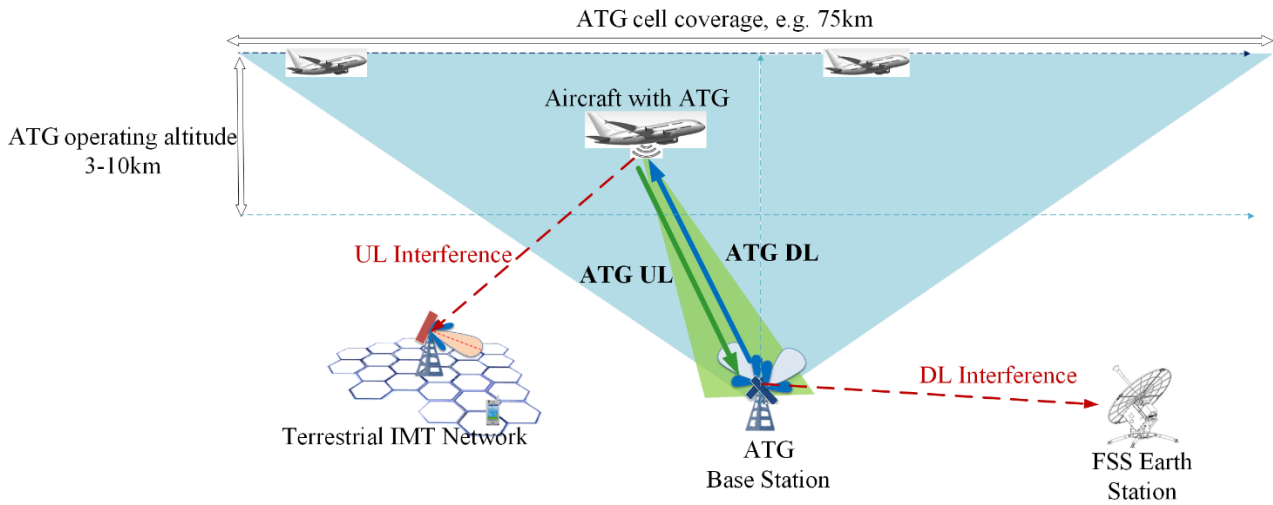

Therefore, China is researching that frequency range 1.9 GHz, or portions thereof, could be developed for ATG UL; while frequency range 3.5 GHz, or portions thereof, could be applied to ATG DL. It is notable that 3.5 GHz is necessary to improve its spectrum efficiency, thus expanding ATG area is an excellent attempt to enhance frequency utilization of 3.5 GHz.

1.3 Operational and technical aspects in China

Operators in China are planning to develop ATG network for future commercial operation. Take China Telecommunications Corporation () for example. Since 2014, China Telecom has cooperated with China Eastern Airlines, China Southern Airlines, Xiamen Airlines, Hainan Airlines and Air China to provide aviation Internet services for China Airlines flights worldwide. Additionally, regarding China Mobile Communications Corporation, it will sign aviation airborne communication framework cooperation agreements with Air China, China Eastern Airlines, China Southern Airlines, Xiamen Airlines and other enterprises to create a new upgrade experience of Internet plus civil aviation.

The 3.5 GHz band ground-to-air transmission of the ATG BS is realized by a 3.5 GHz band active antenna processing unit (AAU). The 3.5 GHz frequency band is only used for one-way ground-to-air transmission, not for air-to-ground/ reception. See Table A2-2 for the 3.5 GHz band index of the ATG BS.

TABLE A2-2

Example on ATG BS system parameter

Parameters	Values
Frequency band	3.5 GHz
System bandwidth	100 MHz
Resource block (RB)	273
Subcarrier spacing (SCS)	30 kHz
Antenna uptilt	15°
Number of antenna ports	64
Type of polarization	Dual-polarization

Parameters	Values
Total Radiated Power (TRP)	200 W
Antenna element gain	10 dBi

2 Air-to-ground communication system in Japan


2.1 Background

Demand has increased for better mobile phone and wireless local area network (LAN) access for people on-board aircraft. Now, several airlines have started cabin use of cellular phones with a system involving satellites. Meanwhile, in Japan, the air-to-ground (ATG) communication system with aircraft, which achieves over 100 Mbit/s transmission speed, is also being studied. In the system, the 40 GHz band facilitates broadband wireless communications on airplanes and on the ground. As shown in Fig. 8, airplanes fly over ground tracking antennas arranged at regular intervals.

As the aircraft passes overhead, the antennas hand over service one after another to the aircraft. The 40 GHz band is not used heavily in commercial applications and is expected to facilitate the broadband communication system.

FIGURE 8

Over 40 GHz wave broadband wireless direct communication system between air and ground operated in Japan

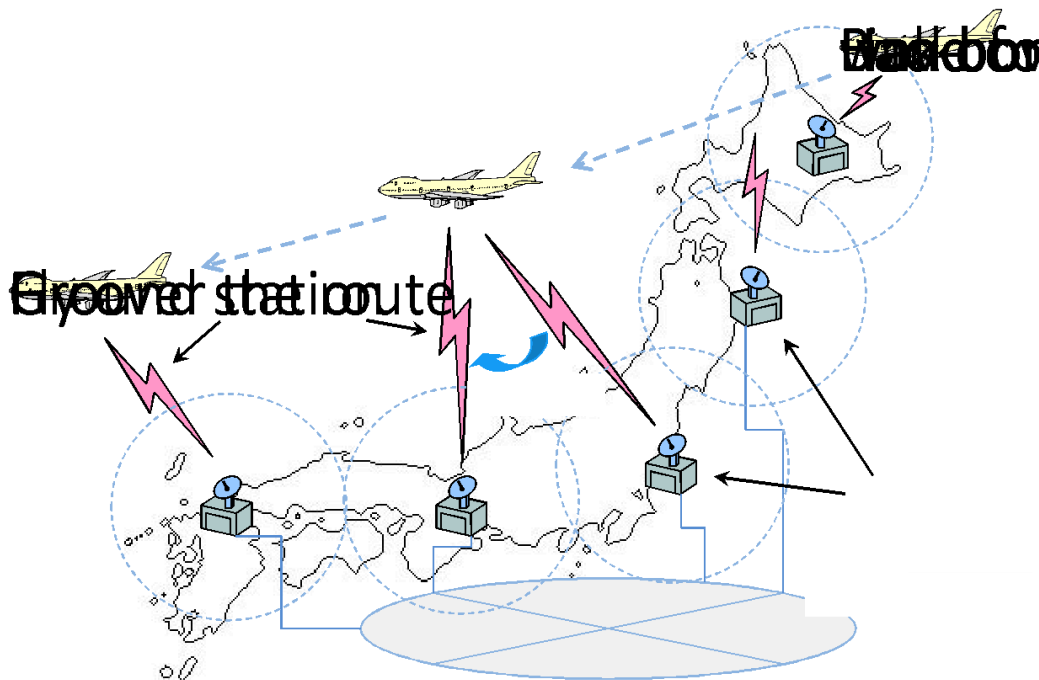

2.2 Descriptions of system architecture and communication equipment

The specifications of the proposed communication system and the airborne/ground equipment are described below. The frequency bands of the up and down links are supposed to use the 40 GHz frequency range and are tentatively given at 44 and 46 GHz bands, respectively for the prototype development. Table 2 summarizes the specification of the proposed communication system.

TABLE 2
Specifications of the communication system

Item	Specifications	Remark
Coverage area	10 km ~ 50 km in radius	Depend on weather conditions and communication speed.
Transmission rate	Up to 100 Mbit/s or over	Variable
Protocol	Full-duplex	
Frequency	Downlink: 44.45 GHz \pm 100 MHz Uplink: 46.8 GHz \pm 100 MHz	The frequencies are tentatively allocated.

The system uses the frequency division multiplex (FDM) method for communication.

Considering the characteristics of the millimetre wave and the spectrum efficiency, both the airborne and the ground antenna track each antenna position. Therefore, the antenna system needs to consider the characteristics of the millimetre wave and the geographical dimensions.


For example, the ground-based tracking antenna must continuously track the aircraft with a high degree of accuracy. Meanwhile, the airborne antenna must track the ground-based antenna based on the aircraft attitude and position, and must be also compact and lightweight.

A) Ground station antenna

The ground station/ has a mechanically controlled reflector to direct the antenna beam in a specific direction by tilting the reflection disk mechanically as shown in Fig. 9. With a reflector controlling the antenna beam in the system, the mechanism provides a cost-effective, power-efficient tracking antenna. Furthermore, a radio wave was separately transmitted at 44.55 GHz, in addition to the communication signal wave so that the system could execute the mono-pulse tracking technique by monitoring the reception level of the radio wave signal.

FIGURE 9

Prototype of ground tracking antenna with lens antenna

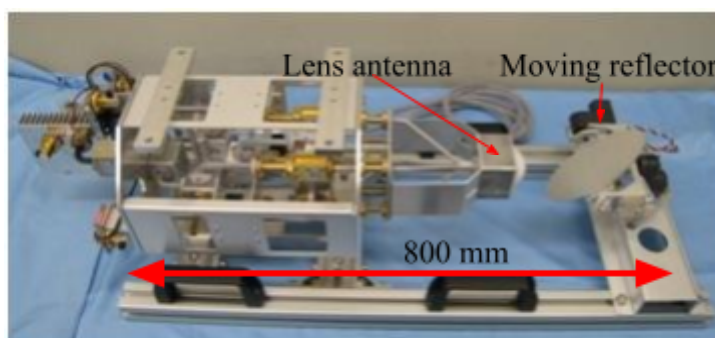


B) Airborne antenna

As shown in Fig. 10, the airborne antenna consists of a transmission (left) and a reception (right) components using active phased array antenna (APAA) technology, which is capable of two-dimensional electronic antenna scanning. The APAA is composed of 64 elements in an eight-by-eight array. The approximate weight of the antenna is 11 kilogrammes. Each element of the APAA is connected to the transmitting/receiving module to control the antenna beam direction by changing the phase component with 4-bit resolution. In addition, the directional control of the antenna is limited to ± 45 degrees as a device specification.

FIGURE 10

Appearance of transmission and reception components of active phased array antenna

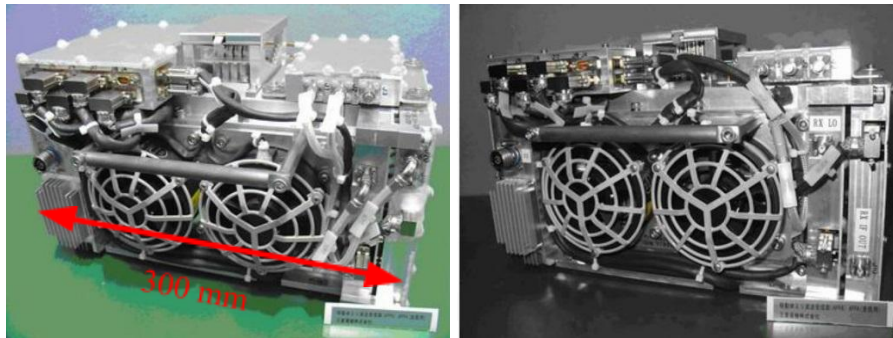

2.3 Verification tests and results

To verify the overall performance of this system, several trial flights with the prototype equipment were successfully conducted in 2012. This verification was mainly for the basic property of the airborne antenna, the ground tracking antenna, access control equipment and some other equipment. An airplane with the APAA was used as the airborne station. Table 3 presents an overview of the airborne verification test, and Fig. 11 illustrates a diagram of the airborne verification test.


The transmission and reception frequencies were allocated as 46.8 GHz and 44.45 GHz, respectively, for simultaneous transmission. The data transfer rate was 141.7 Mbit/s when QPSK modulation with a symbol rate of 78 Msymbol/s was applied. The 106.3 Mbit/s transfer rate was realized when 8PSK modulation with a symbol rate of 39 Msymbol/s was applied.

The antenna control information, such as the reception level and antenna directional data, was stored in the control sections. The modem signal and the error information of Bit Error Rate (BER) or Packet Error Rate (PER) (circuit quality) were also stored in the modem sections at both the airborne and ground stations. The flight data, which consist of airplane position/attitude information, were stored only on the aircraft. The ground station treats the transmitting and receiving data through millimetre waves.

TABLE 3
Airborne verification test overview

Item	Contents
Airborne station	Active phased array antenna
Ground station	Millimetre-wave transmitter/receiver with mechanical driven antenna
Frequency	Uplink: 46.8 GHz Downlink: 44.45 GHz
Data transfer rate	141.7 Mbit/s at 78 Msymbol/s (QPSK) 106.3 Mbit/s at 39 Msymbol/s (8PSK)
Acquisition data	<ul style="list-style-type: none"> - Control information such as reception level and antenna directional data. - Modem signal, error information of packet error rate or bit error rate. - Flight data (airborne status such as position/attitude information).

FIGURE 11

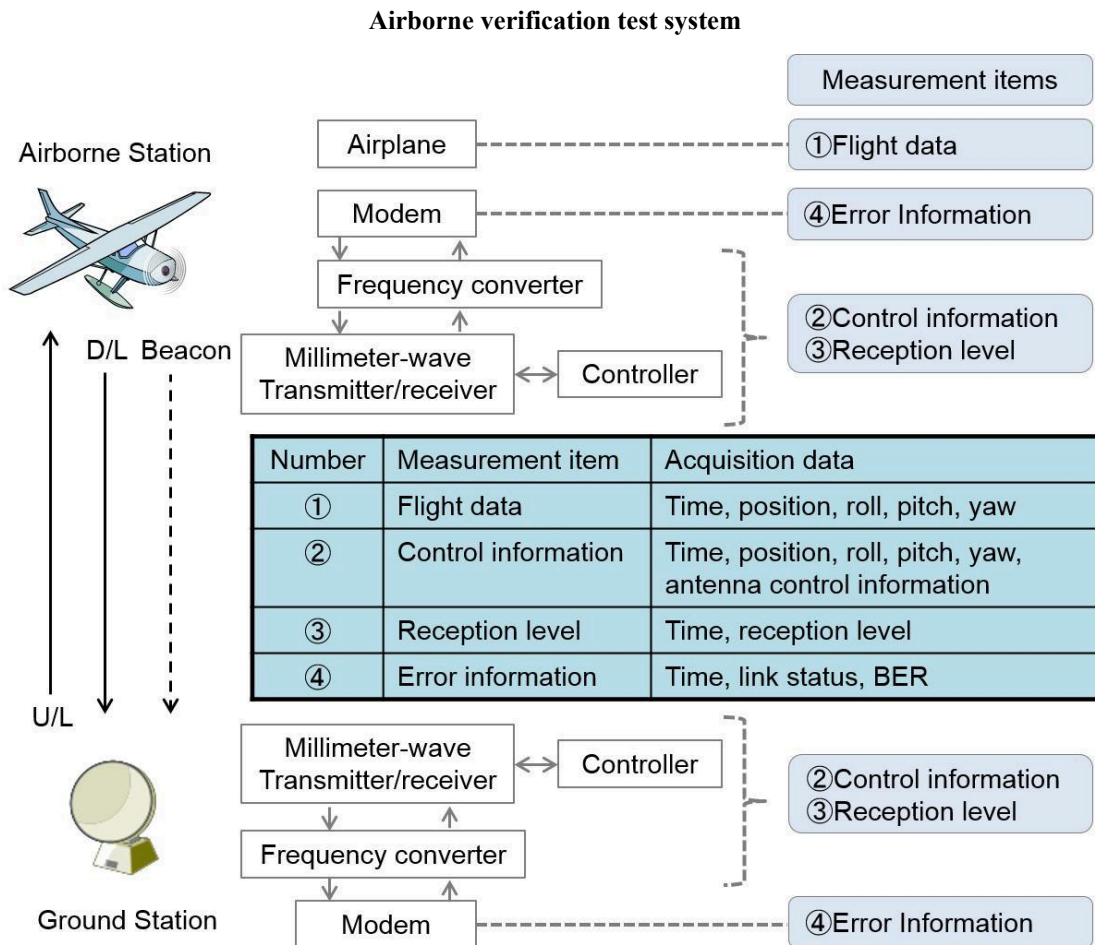

~~We evaluated~~ The following items in the airborne verification test :

- a) antenna pattern measurement,
- b) tracking ability test,
- c) communication capability test and mass volume data transfer test, and
- d) communication distance test.

Finally, the results confirmed the success of the airborne verification tests as follows:

- a) The beam width of the antenna was observed at about 8 degrees in the airborne tests, while it was observed at 10 degrees in an anechoic chamber. Although the width becomes approximately 2 degrees narrower than that of the designed value, the characteristics of the antenna beam were almost identical.
- b) The system with tracking mode could track each antenna position correctly when the maximum angular ground speed was 229.65 km/h at an altitude of 785.47 m, which corresponds to 4.7 degrees per second in calculation.
- c) Reception level and BER characteristics were measured and confirmed when the modulation types were QPSK and 8PSK and the flight altitude was approximately 2 000 m .

- d) The results indicated that communication was established for a horizontal distance of 2 380 m and a flight altitude of 1 816 m, thus the communication distance was approximately 3 km. At this time, the angle of elevation sighting the airborne station from the ground station is 38 degrees, which was confirmed as a minor difference compared to the device specification of 45 degrees for the beam scan range of the APAA used on the airborne station.

Application of these results to various aircraft shall establish an environment that enables mass volume downloading with bidirectional IP communication.