



ASIA-PACIFIC TELECOMMUNITY
**The 32nd Meeting of the APT Wireless Group
(AWG-32)**

4–8 March 2024, Pattaya, Thailand

**Document No:
AWG-32/INP-92**

26 February 2024

ITU-APT Foundation of India (IAFI¹)

**FURTHER UPDATES TO THE PROPOSED WORKING DOCUMENT TOWARDS A
DRAFT NEW APT REPORT ON WAS IN ASIA PACIFIC**

1. Introduction:

AWG-31 started work on a new Report on Wireless Access Systems, considering Radio Local Access Networks (WAS/RLAN) and 5G NRU (as per 3GPP).

Proposal:

Draft Working document in **AWG-31/TMP-29 (Rev. 1)** has been further revised, taking into account the comments and suggestions received during AWG-31

Encl: As above

¹ ITU-APT FOUNDATION OF INDIA ([IAFI](#))

Contact:

Email:



WORKING DOCUMENT TOWARDS A NEW APT REPORT ON RADIO LOCAL AREA NETWORKS (RLAN)

[Editor's Note: This working document is based on contributions that were received at AWG-31 and has not been fully reviewed and needs to be further discussed at AWG-32]

Input documents:

AWG-30/INP-27 NZL

AWG-31/INP-56Rev.1 HPE, Intel

AWG-31/INP-95 IAFI

[AWG-30/INP-27]

WIRELESS ACCESS SYSTEMS / RADIO LOCAL AREA NETWORKS (WAS/RLAN)
IN THE 6 GHZ FREQUENCY BAND

[AWG-31/INP-56Rev.1]

Working document towards a new APT Report on Wi-Fi Technology, Use
Cases, Spectrum Demand and Regulatory Development

[AWG-31/INP-95]

PROPOSED WORKING DOCUMENT TOWARDS A DRAFT NEW APT REPORT
ON STATUS OF 5925 -7125 MHZ SPECTRUM USAGE, TECHNICAL CONDITIONS
AND CHANNEL ARRANGEMENTS FOR WAS/RLAN IN ASIA PACIFIC

[Editor's note: reflect source documents above the text proposals / section titles]

[AWG-31/INP-95]

Table of Contents

- 1 Introduction
- 2 Background
- 3 Abbreviations and acronyms
- 4 Usage of the 5925 – 7125 MHz spectrum
- 5 Technical Conditions
- 6 Channel Arrangements for RLAN
- 7 Channel Arrangements for WAS
- 8 Summary

1. Scope

[Editor's note: The scope below is taken from the Work Plan agreed in AWG-30]

This Report provides an overview of technology developments and implementation aspects of Radio Local Area Networks (RLAN). It reviews previous reports such as on 5 GHz, new developments on the 6 GHz band

The report covers an overview of:

- Global trends in Radio Local Area Networks (RLAN) technologies
- On-going industry developments and technical improvements in Radio Local Area Networks (RLAN)
- Use cases and experiences of implementation of Radio Local Area Networks (RLAN)

Information on RLAN rules adopted by APT and non-APT administrations

[AWG-31/INP-56Rev.1]

This new APT Report provides an overview of the latest **Wi-Fi** technology, use cases, spectrum demand and regulatory developments.

[Editor's note: comments were made about including more RLAN technologies. Input contributions only for Wi-Fi in AWG-30 and AWG-31.]

[AWG-31/INP-56Rev.1] [AWG-31/INP-95]

2. Introduction

[AWG-31/INP-56Rev.1]

Internet connectivity is an essential socioeconomic function and Wi-Fi is the primary means of delivering it to billions of users around the world. Statistics from Cisco show Wi-Fi networks carried 52.6% of the world's total Internet traffic in 2021². Wi-Fi plays a vital role in global economic development. According to a report from Wi-Fi Alliance³, the connectivity provided by Wi-Fi through lower-cost devices delivers trillions of dollars in value to the global economy.

[Editor's Note: Rephrase this para with global harmonization/economies of scale]

Since Wi-Fi was first released to consumers in 1997, Wi-Fi standards have been continually evolving – typically resulting in higher throughput, more capacity and increased coverage. In the last 5 years, the Wi-Fi standards body, IEEE 802.11, developed the latest 802.11ax standard, commercially known as Wi-Fi 6/6E. Wi-Fi 6 Release 1 is based on IEEE 802.11ax in the legacy 2.4 and 5 GHz license-exempt bands, while Wi-Fi 6E extends its frequency range to 6 GHz (5925 – 7125 MHz) to address widespread spectrum congestion in the 2.4 and 5 GHz bands.

² [Cisco's Internet Traffic Report & Forecast](#).

³ Wi-Fi Alliance, [Global Economic Value of Wi-Fi® 2021 – 2025](#)

With Wi-Fi 6E, enterprises can support new use cases that require multi-gigabit speeds, larger numbers of channels, and millisecond levels of latency.

Although Wi-Fi 6E is a relatively recent standard, standardization work for the next generation, 802.11be (or Wi-Fi 7), is already on the agenda of the IEEE 802.11 working group. Wi-Fi 7 builds on Wi-Fi 6E's access to the 6 GHz band and increases data rates to over 40 Gb/s through the use of 320 MHz channels. In addition, Wi-Fi 7 will also further reduce the network latency and improve link robustness in the presence of interference via features such as Multi-Link Operation (MLO).

[AWG-31/INP-95]

Wi-Fi has proved the most popular way of internet connectivity to multiple devices without cables and wiring, in home and business networks, making it a most popular choice.

Wi-Fi-enabled devices such as smartphones, tablets, laptops, and smart home devices can be connected to the internet easily without the need for any physical connection, to a Wi-Fi modem or router. Wi-Fi also allows multiple devices to connect to the internet simultaneously, making it a convenient and cost-effective way to provide internet access in homes, offices, and public spaces. Even large proportion of the mobile data traffic is now delivered to the end user through Wi-Fi devices. Therefore, the demand devices capable to access internet wireless broadband through Wi-Fi, is growing at a phenomenal pace. Presently, there are almost 25 billion Wi-Fi connected devices in the world and almost 3 mobile device every person.

So, the wireless highways through which Wi-Fi traffic moves are congested and will continue to get more crowded. Main reasons are:

- (a) Every house is installed with one Wi-Fi modem and even few having more than one.
- (b) Many communities are served with public Wi-Fi.
- (c) Increased in demand of speed of internet requires wider channel.
- (d) Cellular operators are dumping traffic into the Wi-Fi spectrum, onto the unlicensed spectrum used by Wi-Fi.

So, Wi-Fi became a victim due to its own success and now it is the appropriate time for administrations to take action to improve things.

Presently, only two unlicensed frequency bands have been allocated for Wi-Fi.

- (a) 2.4 GHz band – from 2400.00 to 2483.50 MHz = 83.50 MHz, having 3 channels of 20 MHz or 1 channel of 40 MHz.
- (b) 5.0 GHz band –Parts of 5150-5925 MHz (*5 150-5 250 MHz, 5 250-5 350 MHz and 5 470-5 850 MHz*) having 25 channels of 20 MHz or 12 channels of 40 MHz or 6 channels of 80 MHz or 2 channels of 160 MHz.

So, only 883.50 MHz spectrum in 2.4 GHz and 5.0 GHz band has been allocated for unlicensed band for Wi-Fi. Studies have shown that there is a need of at least 2 GHz spectrum to meet the increased need to respond to increased home working, particularly in high human density

countries such as India. Currently unlicensed Wi-Fi spectrum is inadequate to meet out the growing demand.

So, to meet out the growing demand of Wi-Fi spectrum, it is proposed to harmonize the 1200 megahertz of spectrum available in the 6 gigahertz (GHz) band from 5.925 GHz to 7.125 GHz, to be assigned as unlicensed band for Wi-Fi devices. Unlicensed devices will share this spectrum with incumbent licensed services under rules that are carefully crafted to protect those licensed services and to enable both unlicensed and licensed operations to thrive throughout the band. More than 32 countries in the world including developed economies like USA, Canada, Australia, Japan and EU have already allotted the 5925-7125 MHz band for the use of unlicensed Wi-Fi.

The 6 GHz Wi-Fi spectrum is 1200 MHz wide (more than double the total size of the 2.4 GHz and 5 GHz spectrums) and supports up to 59 channels of 20 MHz or 29 channels of 40 MHz or 14 channels of 80 MHz or 7 channels of 160 MHz channels and 3 channels of 320 MHz. These channels are only accessible to new Wi-Fi 6E devices and enable gigabit Wi-Fi speeds and allow operations free from legacy Wi-Fi interference.

So, 6 GHz frequency band is uniquely suited to meet growing demand for Wi-Fi connectivity, as there is no alternative spectrum now or in the future.

IAFI through this draft new report would like to bring the issue for the consideration of the APT member countries and to support the issue in the upcoming AWG/WRC-23 to globally harmonization the 6 GHz frequency band from 5925 -7125 MHz, total 1200 MHz spectrum, as unlicensed frequency band for Wi-Fi. **[AWG-31/INP-56Rev.1]**

3. References

- [1] Aruba Whitepaper - Technical Guide to Wi-Fi 6E and the 6 GHz band.
- [2] <http://ieeexplore.ieee.org/stamp/stamp.jsp?tp=&arnumber=6178212&isnumber=6178210> IEEE Standard for Information technology--Telecommunications and information exchange between systems Local and metropolitan area networks--Specific requirements Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications," IEEE Std 802.11-2016
- [3] FCC-20-51A1, In the Matter of Unlicensed Use of the 6 GHz Band Expanding Flexible Use in Mid-Band Spectrum Between 3.7 and 24 GHz, REPORT AND ORDER AND FURTHER NOTICE OF PROPOSED RULEMAKING, Adopted: April 23, 2020
Released: April 24, 2020.
- [4] Frequency Sharing for Radio Local Area Networks in the 6 GHz Band, January 2018, Version 3, RKF Engineering Solutions

- [5] ECC Report 302, Sharing and compatibility studies related to Wireless Access Systems including Radio Local Area Networks (WAS/RLAN) in the frequency band 5925 - 6425 MHz.
- [6] Recommendation ITU-R RA.769-2: "Protection criteria used for radio astronomical measurements"
- [7] M. Mehrnoush, C. Hu and C. Aldana, "AR/VR Spectrum Requirement for Wi-Fi 6E and Beyond," in IEEE Access, vol. 10, pp. 133016-133026, 2022, doi: 10.1109/ACCESS.2022.3231229.
- [8] Cisco Whitepaper - IEEE 802.11ax: The Sixth Generation of Wi-Fi White Paper.
- [9] Intel Corporation – Next generation Wi-Fi - Wi-Fi 7 and beyond

[AWG-31/INP-95]

4. Background

The demand for wireless broadband is increasing at a phenomenal pace, as citizens and businesses groups are increasingly relying on Internet connectivity. To meet this demand, the various administrations are continuously evaluating the use of the spectrum available for the use of Wi-Fi in more efficient usage using a variety of methods, including unlicensed operations.

The 6 GHz band is comprised of allocations for Fixed Services, Fixed Satellite Services (FSS) and Mobile Services across sub-bands. Fixed microwave service licensees, specifically those operating point-to-point microwave links for supporting variety of critical services commercial, private entities, and public safety agencies, are the largest user group in the 6 GHz band.

The Fixed Satellite Service (FSS) (Earth-to-space) is allocated in all sub-bands of 6 GHz, except for the 7.075-7.125 GHz portion. FSS operations are heaviest in the 6 GHz band, which is paired with the 3.7-4.2 GHz, space-to-Earth frequency band. Predominant FSS uses of these frequencies include content distribution to television and radio broadcasters, including transportable antennas to cover live news and sports events, cable television and small master antenna systems, and backhaul of telephone and data traffic.

Considering the existing and anticipated congestion, many administrations decided to provide additional spectrum to complement spectrum where Wi-Fi is presently deployed, to ease any congestion so that businesses and consumers can take advantage of new data intensive applications. By making this spectrum available for unlicensed use, cable companies and wireless carriers started expanding their Wi-Fi hotspot networks to provide customers' access to even higher speed data connections, than they experience today and expand their networks in areas where they need additional capacity.

Many administrations allocated entire 6 GHz from 5925 – 7125 MHz, as unlicensed 3rd frequency band for Wi-Fi. So, a contiguous 1200-megahertz block of spectrum is now available

n many countries for the development of new and innovative high-speed, short range Wi-Fi devices.

[AWG-31/INP-56Rev.1] [AWG-31/INP-95]

5. Abbreviations and acronyms

[AWG-31/INP-56Rev.1]

| <i>Acronyms</i> | <i>Definition</i> |
|-----------------|---|
| AFC | Automated Frequency Coordination |
| AP | Access Point |
| BEL | Building Entry Loss |
| BSS | Basic Service Set |
| DFS | Dynamic Frequency Selection |
| DUT | Device Under Test |
| EIRP | Equivalent Isotropically Radiated Power |
| FS | Fixed Service |
| FSS | Fixed Satellite Service |
| LPI | Lower Power Indoor |
| PL | Path Loss |
| RAS | Radio Astronomy Services |
| RX | Receiver |
| SP | Standard Power |
| TX | Transmitter |
| ULS | Universal Licensing System |
| VLP | Very Low Power |

[AWG-31/INP-95]

- Wi-Fi - Wireless Fidelity, most popular way of developing wireless local area network in home, office or any public place.
- FSS - Fixed Satellite Service
- IMT - International Mobile Telecommunications
- WRC - World Radiocommunication Conference
- LTE - Long Term Evolution
- RLAN - Radio Local Area Network, also known as WLAN or Wi-Fi
- WAS - Wireless Access System, use today for implementing wireless access

include cellular, cordless and wireless local area network systems.

[AWG-31/INP-56Rev.1]

6 Wi-Fi Technology used for RLAN networks

[Editors' Note: Current information will come under section 6 on WiFi Technology]

6.1 Spectrum demands for Wi-Fi networks.

hWi-Fi technology uses license-exempt spectrum and must allow adjacent uncoordinated networks to coexist whilst providing high service quality to users. But recently, the spectrum congestion for Wi-Fi networks has been acute due to the exponential growth of device numbers and data traffic. Since the WRC-2003, no new mid-band license-exempt spectrum has been made available for Wi-Fi. Furthermore, the 2.4 and 5 GHz Wi-Fi spectrum doesn't offer a sufficient number of wide channels for newer applications and services, and the supported narrow channels at 20 and 40 MHz are not capable of the throughputs offered by many current broadband access technologies (e.g. fiber, DOCSIS, and Fixed-Wireless services).

[Editor's Note: additional text needed for spectrum needs]

A study by **Wi-Fi Alliance in 2017** showed that in order to maintain desired levels of performance, 1.5 GHz of new spectrum would be needed by 2025. Recognizing that lack of spectrum access threatens Wi-Fi's critical role to their countries' futures, policymakers are expanding spectrum access for Wi-Fi with a particular focus on the 6 GHz band (5.925 – 7.125 GHz).

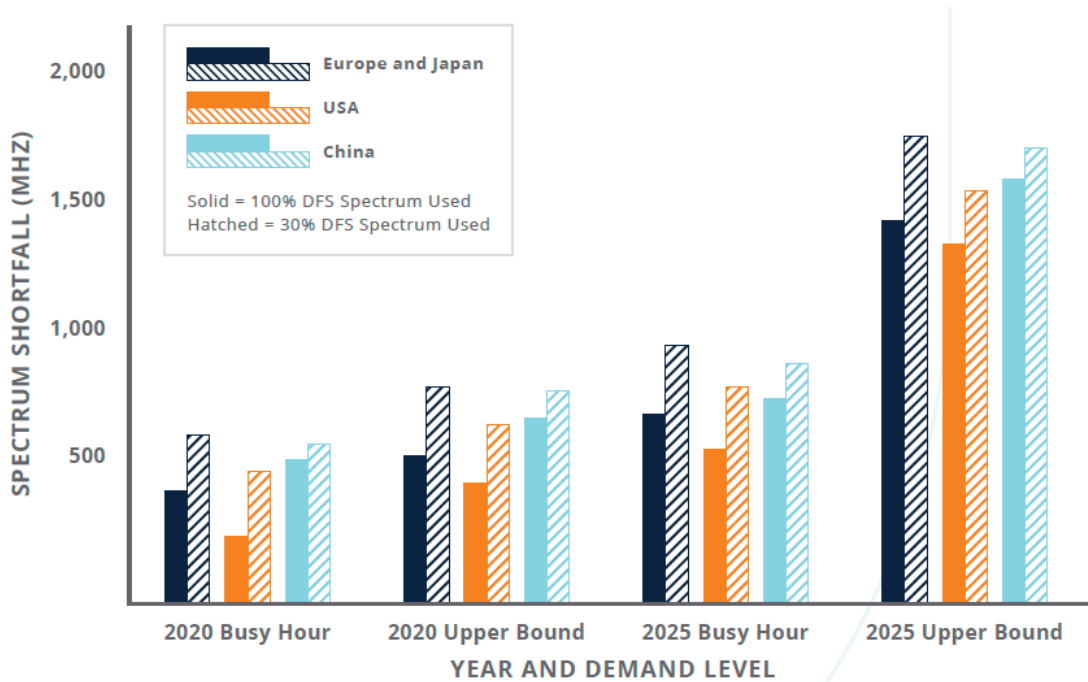


Figure 1 Predicted Wi-Fi spectrum shortfall⁴

⁴ Source: Quotient Associates for the Wi-Fi Alliance, 2017

6.1.1 Making more efficient use of spectrum in the 5 GHz band

Wi-Fi use is currently accessing 580 MHz of license-exempt spectrum in the 5 GHz band. Some of the available channels either have Dynamic Frequency Selection (DFS) requirements to protect military and meteorological radars in these frequencies, or are limited to indoor use only. [Editor’s Note: include other 5Ghz bands to give full picture; also cover APT countries and better structure; use response]

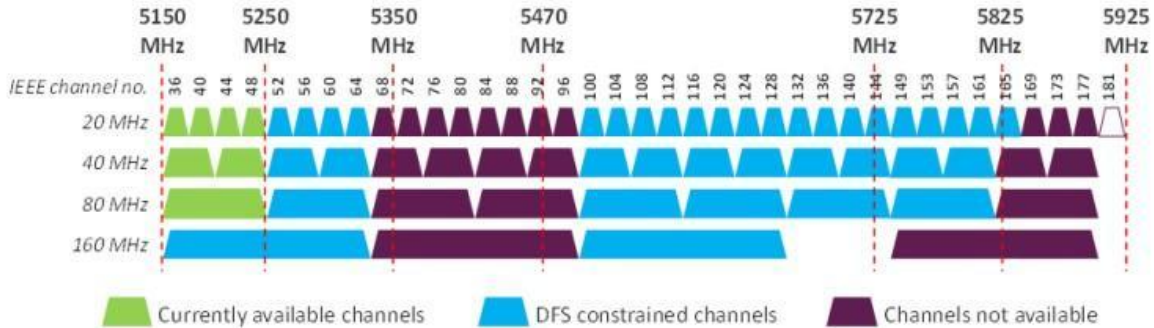


Figure 2 Wi-Fi channels in the 5 GHz band

At the World Radio Conference 2019 (WRC-19), the Radio Regulations were amended to allow limited outdoor RLAN use in the 5.15 – 5.25 GHz band: up to 1W with controlled use and by implementing antenna elevation masks that limit EIRP in the direction of satellite space stations.

Resolution-229 (WRC-19)⁵ provides guidance for administrators who want to deploy higher-power outdoor RLAN services in 5.15 – 5.25 GHz. This *Resolve* gives administrations flexibility to permit Wi-Fi stations, for indoor or controlled outdoor use, to operate up to a maximum EIRP of 30 dBm, while also mitigating the interference risk to Fixed Satellite Service (FSS) Earth-to-space communications with an EIPR mask at certain elevation angles.

After WRC-19, many administrations implemented Resolution-229. For instance, New Zealand regulator Radio Spectrum Management (RSM) updated its General User License for Short Range Device⁶ in 2020 by allowing 1W EIRP and outdoor use for 5.15 – 5.25 GHz. Similarly, Australia Communications and Media Authority (ACMA) consulted the industry in 2022 for its proposal in implementing this Resolution. ACMA proposed to allow 1W EIRP and outdoor use, as well as mandating an emission mask of a maximum of 125 mW (21 dBm) EIRP at any elevation angle above 30 degrees, as measured from the horizon⁷. In North America, ISED Canada and the FCC in the United States even permitted an EIRP up to 4W (36 dBm)⁸ in advance of WRC-19.

⁵ https://www.itu.int/dms_pub/itu-r/oth/0C/0A/R0C0A00000F0076PDFE.pdf

⁶ <https://gazette.govt.nz/notice/id/2022-go3100>

⁷

<https://www.acma.gov.au/consultations/2022-10/new-arrangements-low-interference-potential-devices-consultation-352022>

⁸

[https://www.ecfr.gov/current/title-47/chapter-I/subchapter-A/part-15/subpart-E/section-15.407#p-15.407\(a\)](https://www.ecfr.gov/current/title-47/chapter-I/subchapter-A/part-15/subpart-E/section-15.407#p-15.407(a))

Table 1 Regulatory requirement for RLAN operating in 5.15 – 5.35 GHz

| Country | Regulatory requirement |
|-------------|--|
| US | 1W maximum conducted power and maximum antenna gain 6 dBi, maximum power spectral density 17dBm/MHz; Maximum EIRP at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm); Allows point to point system with 23dBi antenna gain |
| Canada | 1W maximum conducted power and maximum antenna gain 6 dBi, maximum power spectral density 17dBm/MHz; Maximum EIRP at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm); Allows point to point system with 23dBi antenna gain |
| New Zealand | 1W maximum EIRP; EIRP mask ⁹ for elevation above horizon; indoor and outdoor |
| Australia | 1W maximum EIRP; 17dBm/MHz Maximum EIRP at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm); |

For UNII-3 band, many regulators have decided that there is little risk of interference from indoor use of Wi-Fi in the frequency range (5725 – 5850 MHz) to incumbent radar systems and are relaxing or removing the DFS requirements. For instance, in 2020 Ofcom UK removed the DFS requirement for indoor RLAN/Wi-Fi operations up to 200 mW EIRP in the 5.8 GHz band.¹⁰
[Editor’s Note: adjust terminology]

[AWG-31/INP-56Rev.1]

6.1.2 New spectrum in the 6 GHz band

[Editor’s Note: add additional reasoning for why 6GHz and rationale for additional spectrum; also include WIFI 7 and 320 MHz channels]

The 6 GHz band encompasses 1200 MHz of spectrum from 5925 – 7125 MHz, compared to 83.8 MHz in the 2.4 GHz band and 570 MHz in sections of 5 GHz. Some countries and regions have enacted a 20 MHz guard band from 5925 – 5945 MHz to protect DSRC/CV2X services.

This allows for 59x20 MHz wide channels; 29x40 MHz; 14x80 MHz, or 7x160 MHz. The number of wide channels is especially significant, as gaps in allocated spectrum in the 5 GHz band limit 80 MHz channels to 7 and 160 MHz channels to 3, and wide channels are necessary for the highest data rates possible with the latest generations of Wi-Fi technology.

⁹ [Resolve 5 of RESOLUTION 229 \(REV.WRC-19\)](#)

¹⁰ https://www.ofcom.org.uk/_data/assets/pdf_file/0036/198927/6ghz-statement.pdf

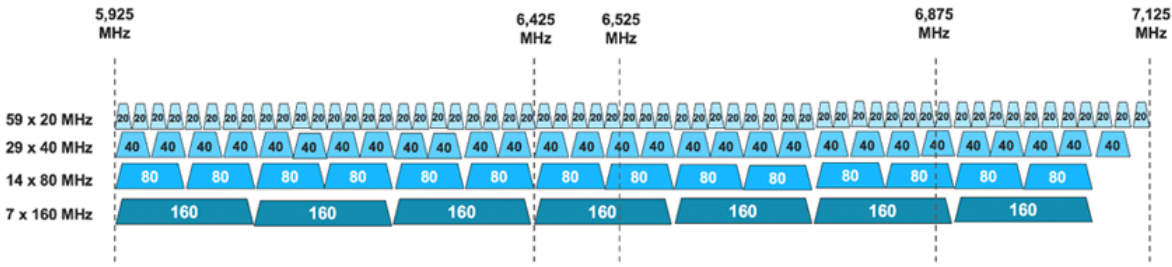


Figure 3 6GHz Wi-Fi Channels plan

The 6 GHz band is uniquely suited to address the demand for additional Wi-Fi spectrum for the following principal reasons:

a) The 6GHz band will be able to support wide channel bandwidth for dense Wi-Fi networks.

A shared license-exempt band requires multiple radio channels in order to distribute load and reduce co-channel interference (CCI). It is well known that 2.4 GHz with only 3 non-overlapping channels is heavily congested around the world. This is depicted on the left of Figure 4. It is commonly understood by the industry and academia that self-coordinated Wi-Fi requires no fewer than about seven to nine non-overlapping radio channels in a typical corporate or campus deployment to absorb current demand levels, as shown in the middle diagram of Figure 4. For large public venue environments with extreme loading levels such as stadia, arenas, university lecture halls, and airports research and years of experience have proven that 20 or more discrete channels are required for Wi-Fi to operate successfully and carry the tremendous levels of traffic at such venues. Every major enterprise Wi-Fi equipment manufacturer has historically published detailed design guidelines for such large venues calling for 20 MHz channels to be used, because only this narrowest channel width yielded a sufficient number of non-overlapping channels in the 5 GHz band.¹¹

The principle behind this phenomenon is that having fewer channels increases the probability of collisions between co-channel radio cells, even at low loading levels. An obvious reason for this is depicted in Figure 4, where nodes in a Wi-Fi network with small inter-cell distances can “hear” many more co-channel radios. But a more subtle effect is the resulting rise in the noise floor from “hidden” Wi-Fi cells. This increasing the collision probability and reduces the available signal-to-noise level, which in turn reduces the data rate, thereby making each transmission take longer (increased latency) . By contrast, having more channels both reduces the absolute number of “hearable” co-channel cells, and helps keep the noise floor nearer the thermal limit, which maximizes data rates and therefore transmits data more quickly – requiring less airtime. This attribute of Wi-Fi enables well-designed networks with a sufficient number of channels to absorb extremely high demand surges.

¹¹ “Very High Density 802.11ac Networks”, Aruba Networks, 2015,

https://higherlogicdownload.s3.amazonaws.com/HPE/MigratedAssets/Aruba_Very_High_Density_802.11ac_Networks_VRD.zip

The 5 GHz band is only able to provide 5x80MHz or 3x160MHz channels, which are not sufficient to deploy a useful Wi-Fi network. Network operators are forced to use narrower channels such as 40 MHz or even 20 MHz, which limit the peak data throughput under 600 Mbps for a typical device in even optimal RF conditions. Given that multi-gigabit broadband connections are being more and more widely adopted, narrow band Wi-Fi networks become the bottleneck of overall network performance and user experience.

The 1200 MHz of spectrum in the 6 GHz band yields an equivalent number of 80 MHz channels as there are 40 MHz channels in the 5 GHz band. With 1200 MHz of spectrum in the 6 GHz band, 80 MHz channels will become the default in the large majority of enterprise deployments. It even allows 7x160 MHz channels that can enable novel use cases like Augmented/Virtual Reality which require low latency and extremely high throughput.

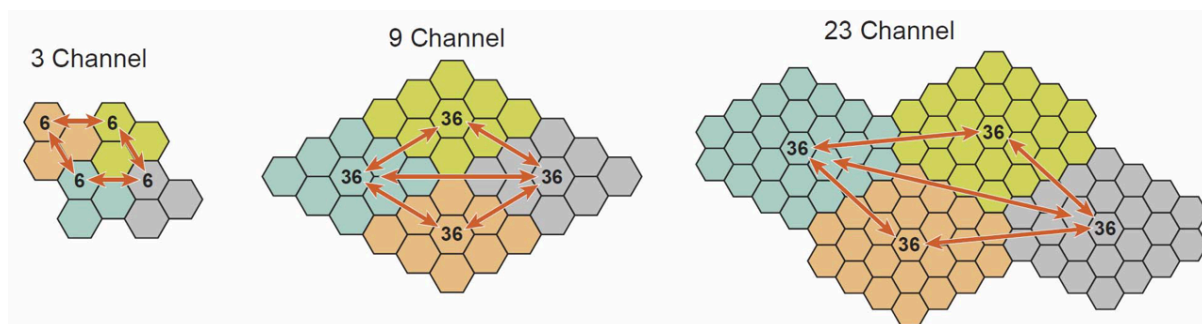


Figure 4 Inter-Cell distance increases with available channel count

b) The 6 GHz band does not need to support any legacy Wi-Fi technology.

Wi-Fi technology is backward compatible with previous generations. Legacy devices like Wi-Fi 4 and 5 can work together with devices supporting the latest Wi-Fi 6 standard. However, this backward compatibility can decrease the network performance, as the technology features provided by the latest Wi-Fi standard cannot be realised with legacy devices in the same network. The 6 GHz band would, for the first time, eliminate outdated and inefficient radio access technologies, permitting the far more spectrally efficient Wi-Fi 6E (and above) to operate without the burden of legacy radio interoperability. This will improve the user experience and spectral efficiency, which can only serve to further the adoption of Wi-Fi technologies.

[AWG-31/INP-56Rev.1]

6.2 Industry and regulatory development for 6 GHz Wi-Fi

Since the FCC opened the 6 GHz band for Wi-Fi, there has been a strong momentum of Wi-Fi 6E device ecosystem development. According to Intel’s data tracker¹², the total number of Wi-Fi 6E-capable devices reached 1262 by the end of Q4 2022. The number includes PCs (by far the majority), phones, APs, and TVs. The count finished strongly for 2022 with the number of Wi-Fi 6E devices growing by more than 2.5 times from end of Q1 to end of Q4 last year. **It is**

¹²

<https://wifinowglobal.com/news-and-blog/update-number-of-commercially-launched-wi-fi-6e-devices-reaches-792-in-2q22/>

forecasted that by 2025, Wi-Fi 6 and Wi-Fi 6E are expected to surpass 80 percent market share and dominate Wi-Fi connectivity in the smartphone segment.

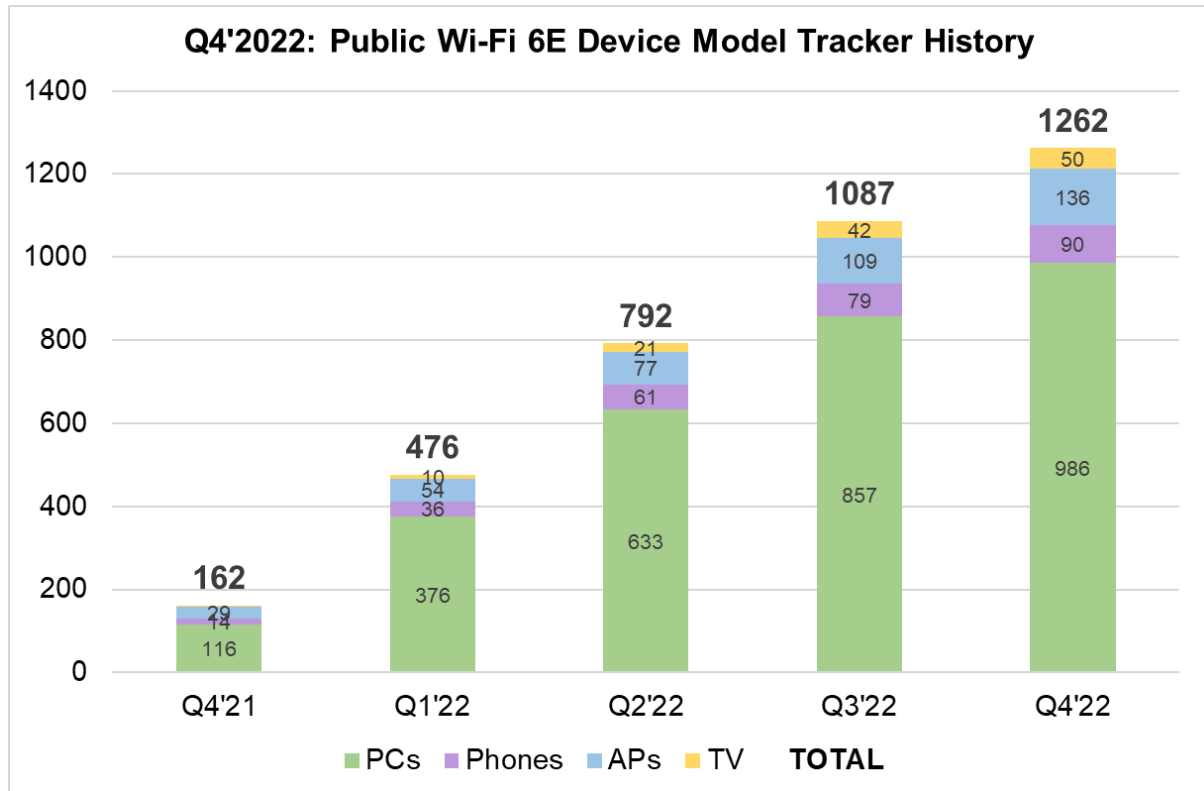


Figure 5 Public Wi-Fi 6E device model track

[Editor's Note: Resolve issue of numbers vs percentage]


[AWG-31/INP-56Rev.1]

6.2.1 Equipment Classes for 6 GHz License-Exempt Operation

Wi-Fi 6E devices achieve the best possible performance while ensuring that important licensed incumbent services are not adversely affected. These incumbent services include Fixed Service (FS) links and Fixed Satellite Service (FSS) uplinks. Wi-Fi 6E achieves this goal by defining three separate operating classes for Wi-Fi 6E access points: Low Power Indoor (LPI), Standard Power (SP), and Very Low Power (VLP). Client device technical characteristics are a function of the type of access point they are connected to.

Low Power Indoor (LPI) AP

- Fixed indoor only
- Up to 63X lower energy
- No antenna connectors
- No weatherproofing
- Wired power




Subordinate Indoor Device

- Same rules as LPI AP, **plus**:
- Under AP control
- No direct Internet connection

Standard Power (SP) AP

- Fixed indoor / outdoor
- Controlled by AFC database
- Automated geolocation
- Pointing angle restriction




Fixed Outdoor Device

- Same rules as SP AP, **plus**:
- Attached to structure

Very Low Power (VLP) AP

- Mobile indoor / outdoor
- 160X lower energy



~2 Gbps throughput with sub-ms latency at 3m

Figure 6 Device Classes in 6 GHz

Low Power Indoor Class

The most popularly used device class for Wi-Fi 6E is LPI. These will be the familiar home or enterprise APs and clients. By definition, these devices are indoors and are shielded by buildings to some extent so the power that leaks outside will be attenuated, which allows safe operation across the band at a power level only slightly lower than 5 GHz indoor Wi-Fi APs.

Depending on the regulatory requirement, LPI equipment can operate at a maximum EIRP of 23 dBm, 24 dBm or 30 dBm and is often defined in terms of a Power Spectral Density (PSD) of dBm/MHz. LPI APs can operate across the entire 6 GHz band, as their low EIRP is not posing any harmful interference to incumbents after building entry loss is subtracted. To ensure that these indoor-only units are not used outdoors, or with external high-gain antennas (which has the potential to cause interference), regulators typically provide a list of physical requirements for certifying an LPI AP:

- No connectors for external antennas
- No battery-powered operation
- Not weatherized
- Labeled for indoor use only

To further improve spectral efficiency and performance, direct communication between client devices (Client to Client) communications are also authorized by some regulators and under consideration by others.

Standard Power Class

The EIRP of a Standard Power AP is up to 36 dBm. Because of the increased risk of interference with incumbent services from a higher EIRP, there are certain regulatory requirements for SP APs to operate. First, depending on the incumbent service types, SP APs are only allowed to

operate in the certain frequency ranges within the overall 6 GHz band. Secondly, operation of SP requires an Automatic Frequency Coordination (AFC) service to calculate the channel availability and allowed EIRP at a specific location.

The AFC query-response protocol has been defined by the Wi-Fi Alliance¹³ and consists of an inquiry message from the AP and a response from the AFC server. An important information element in the inquiry is the AP's geolocation. There is no single method to accurately determine the AP's location; it is assumed that GPS or some other robust and reliable method is used. The AFC uses the AP's latitude, longitude, antenna height (above ground level) and some other information in the registration and inquiry messages, to calculate and provide to the AP a response containing the set of channels or frequency ranges and the maximum permissible power levels at which it may transmit without creating interference to nearby incumbent services.

In the US, FCC is considering ¹⁴direct communication between client devices (Client to Client) communications within Standard Power mode coverage area.

Very Low Power Class

VLP devices can operate both indoor and outdoor in the whole 6 GHz range. This allows use cases like mobile APs, mounted in vehicles or hotspots on smartphones. In most countries and regions, the maximum EIRP for a VLP AP is 14 dBm, with a PSD limit of 1dBm/MHz.

Client Devices

Client devices are expected to be limited in geography by APs. If there is no AP signal, devices cannot connect and will not transmit. Therefore, it is assumed that the AP is transmitting in an authorized manner, and the client can adjust its transmit power and channel with reference to the AP.

[AWG-31/INP-95]

6.2.1 Technical Conditions regarding use Wi-Fi in 6 GHz band:

Initially Wi-Fi networks operates in the unlicensed 2.4 GHz and later unlicensed 5 GHz bands was also open for Wi-Fi. The 2.4-GHz band works the best for indoor Wi-Fi use, as easily penetrates through walls and furniture, and signals generally travel farther at the same power level as they do in the 5-GHz band.

In the 2.4 GHz band, roughly 80 MHz frequency band is available for the Wi-Fi use. The channels are 20 or 22 MHz wide, so normally three nonoverlapping channels are existing. The situation is slightly different in Europe, where 13 channels are allowed, but still just three nonoverlapping channels, In Japan, there are 14 channels with four nonoverlapping channels.

¹³ <https://www.wi-fi.org/file/afc-specification-and-test-plans>

¹⁴ [DA-21-7A1_Rcd.pdf \(fcc.gov\)](#)

Signals in the 5-GHz band have a shorter range in the home, mostly because of the walls and furniture, but the band extends from 5.125 to 5.925 GHz (800 MHz), so 24 non-overlapping channel of 20MHz-wide each or 12 channels of 40 MHz wide or 6 channels of 80 MHz or 2 channels of 160 MHz wide channels can work.

In the Wi-Fi world, when two conversations collide, all the devices go quiet and then try to talk again a little while later. The amount of time they wait is determined by an exponentially increasing time delay, known as a backoff. With more collisions, the backoff increases, and the Wi-Fi becomes slower and less reliable. Today, congestion has increased so much in many regions making 2.4 GHz band unusable for transferring data at high rates.

Wi-Fi congestion may go even worse, as the mobile-phone carriers are planning to use the technology called as LTE-Unlicensed (LTE-U) or Licensed Assisted Access (LAA). It uses 4G LTE radios and routers to send and receive data via the same 5 GHz frequencies as used by unlicensed Wi-Fi.

So, to overcome the problem, many administrations allowed entire 6 GHz band from 5925 -7125 MHz band for the use of unlicensed Wi-Fi, with two types of operation.

- (a) Authorizing unlicensed standard-power access points in the band 5925-6875 MHz, through use of an AFC system. The AFC is designed to protect devices with fixed locations.
- (b) Opening the entire 6 GHz band for unlicensed indoor low power access points. By authorizing use of the entire 6 GHz band for indoor use, so 59 channels of 20 MHz or 29 channels of 40 MHz or 14 channels of 80 MHz or 7 channels of 160 MHz channels or 3 channels of 320 MHz are possible to expand capacity and performance capabilities.

So, the 6 GHz Wi-Fi or Wi-Fi 6E extends the same Wi-Fi capabilities into the 6 GHz band to allow greater efficiency, higher throughput, and increased security. 6 GHz Wi-Fi is specifically designed for gigabit broadband and immersive wireless applications. Considering the vast capabilities Wi-Fi 6E, many countries around the World have already delicensed 6 GHz band for Wi-Fi.

[AWG-30/INP-27]

X Technical conditions for authorising WAS/RLAN in the 6 GHz frequency band

When making 6 GHz frequency band available for WAS/RLAN under a general authorisation / licence exemption / unlicensed regimes technical conditions need to be applied for coexistence with existing radio systems, particularly fixed links. There are different options that have been applied by regulators and regions these options are contained below.

[AWG-30/INP-27]

X.1 Option 1 Technical conditions for authorising the 5 925 -6 425 MHz frequency band

Table 1: Technical conditions for 6 GHz WAS/RLAN

| Permitted frequency band | Category | Maximum Power (EIRP) | Max. Power Density (EIRP) | Conditions |
|---|------------------------|----------------------|-----------------------------|---|
| 5 925 – 6 425 MHz | Low Power Indoor (LPI) | 24 dBm (250 mW) | 11 dBm / MHz (12.6 mW /MHz) | Indoor use only within a building or within an enclosed space having attenuation characteristics at least equivalent to those of a building |
| | Very Low Power (VLP) | 14 dBm (25.11 mW) | 1 dBm / MHz (1.26 mW / MHz) | No indoor restriction (i.e. Outdoor is permitted) |
| Applicable Standard: ETSI EN 303 687 “6 GHz WAS/RLAN” | | | | |

[AWG-31/INP-56Rev.1]

6.2.2 Regulatory requirements for 6GHz RLAN

Australia

In 2022, ACMA updated the LIPD class license arrangements to support RLANs in the 5925 – 6425 MHz range as the first stage of its 6 GHz band planning. The devices operating within that frequency range are allowed to operate at two different power limits: 24 dBm (11 dBm/MHz), if only used indoors or 14 dBm (1 dBm/MHz) in all locations.

Brazil

In Brazil, the whole 6 GHz band (5925 – 7125 MHz) available for license-exempt RLAN use, which includes two device classes: LPI (30 dBm) and VLP (17 dBm) devices. Brazil Anatel is currently working on enabling SP mode under supervision of AFC System.

Canada

Canada allows license-exempt RLAN use across the entire 6 GHz, with 3 different power levels available across different portions of that range:

- 14 dBm “very low power”
- 30 dBm “low power” for indoor use only
- 36 dBm for standard power devices under AFC control.

The AFC is to be compatible – as much as possible – with the US version, to help deal with cross-border coordination.

“Listen-before-talk” protocols are to be implemented on all low and very-low power devices. SP APs under the control of an AFC system will be permitted to operate on a license-exempt basis in the 5925 – 6875 MHz frequency range. For the protection of FSS satellite-based receivers from Standard Power devices operating outdoors, the SP APs’ maximum EIRP must be under 125 mW at elevation angles above 30 degrees above the horizon – consistent with Canada’s experience in other bands.

South Korea

In South Korea, the whole 6 GHz band is authorised for unlicensed RLAN use. The use includes two device classes: low power indoor use – maximum 24 dBm and 2 dBm/MHz, and very low power (14 dBm) devices were also included but limited to operate in the lower 6 GHz band. South Korea has also stated their intention to authorize Client to Client mode and Standard Power in conjunction with a Korean Frequency Coordination system in the future.

United States

The Federal Communications Commission (FCC) made the entire 6 GHz band (5925 – 7125 MHz) for Wi-Fi 6E and other unlicensed uses in the US in April 2020.

The FCC authorizes indoor low-power operations over the full 1200 MHz and Standard Power devices in 850 MHz of the 6 GHz band (the other ranges being excluded due to the presence of mobile incumbent services). The FCC requires the SP APs to use an AFC¹⁵ to prevent interference to incumbent services.

For Standard Power outdoor use, the maximum EIRP at any elevation angle above 30 degrees as measured from the horizon must not exceed 21 dBm.

Table 2 Maximum EIRP for 6 GHz unlicensed devices in the US

| Devices Class | Operating bands | Maximum EIRP | Maximum EIRP Power Spectral Density |
|---------------------------------------|--|--------------|-------------------------------------|
| Standard-Power AP (AFC controlled) | U-NII-5 (5925 - 6425 MHz) U-NII-7 (6525 - 6875 MHz) | 36 dBm | 23 dBm/MHz |
| Client Connected to Standard-Power AP | | 30 dBm | 17 dBm/MHz |
| Low-Power (indoor only) | U-NII-5 (5925 - 6425 MHz) U-NII-6 (6425 - 6525 MHz) | 30 dBm | 5 dBm/MHz |
| Client Connected to Low-Power AP | U-NII-7 (6525 - 6875 MHz) U-NII-8 (6875 - 7125 MHz) | 24 dBm | -1 dBm/MHz |

European Union

In 2020, EU authorized¹⁶ License Exempt LPI and VLP operation in the 5925 – 6425 MHz range and currently studying the 6425 – 7125 MHz range. The devices operating within that frequency

¹⁵ Federal Register, [Unlicensed Use of the 6 GHz Band](#)

¹⁶ [https://docdb.cept.org/download/50365191-a99d/ECC%20Decision%20\(20\)01.pdf](https://docdb.cept.org/download/50365191-a99d/ECC%20Decision%20(20)01.pdf)

range are allowed to operate at two different power limits: 23 dBm (10 dBm/MHz), if only used indoors or 14 dBm (1 dBm/MHz) in all locations. EU also authorized Client to Client operation under LPI mode.

ATU

In July of 2021, African Telecommunications Union (ATU) recommended License Exempt LPI and VLP operation in the 5925 – 6425 MHz range. The devices operating within that frequency range are allowed to operate at two different power limits: 23 dBm (10 dBm/MHz), if only used indoors or 14 dBm (1 dBm/MHz) in all locations.

Colombia

In Nov 2022, Colombia ANE announced¹⁷ allocation of the entire 6GHz band (5925 –7125MHz) for License Exempt LPI operation at maximum power level of 30 and 24 dBm (5 and -1 dBm/MHz) for Access Point and Client devices respectively.

Argentina

In May 2023, Argentina Enacom announced¹⁸ allocation of the entire 6GHz band (5925 –7125MHz) for License Exempt operation. Regulatory details are not announced yet.

Saudi Arabia

In March of 2021, Saudi Arabia allocated the entire 6GHz band (5925-7125MHz) for License Exempt LPI operation at maximum power level of 30 and 24 dBm (10 dBm/MHz) for Access Point and Client devices respectively. Work on SP and VLP modes are ongoing.

More countries to be added...


[AWG-31/INP-56Rev.1]

6.2.3 Sharing with incumbent services in the 6 GHz band

The 5925 – 7125 MHz frequency range is primarily allocated to Fixed Service (FS), Fixed Satellite Service (FSS) and Mobile Service (MS). The 6650 – 6675 MHz frequency range is also used by the Radio Astronomy Service (RAS). Although there is no primary allocation, ITU Radio Regulation requires administration to protect RAS at 6650-6675.2 MHz in its footnote 5.149.

¹⁷ [Wifi 6: Sergio Massa launched a program to improve Internet connectivity throughout the country - Infobae](#)

¹⁸ [Wifi 6: Sergio Massa launched a program to improve Internet connectivity throughout the country - Infobae](#)

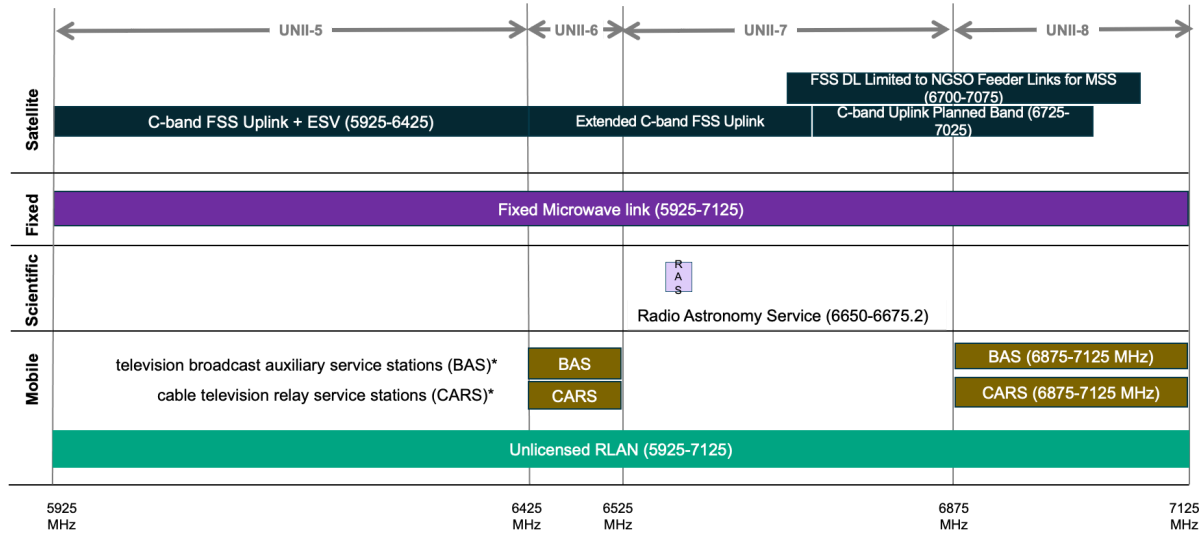

* Country specific, each country may have different usage.

Figure 7 Current use of 5925 – 7125 MHz

For protecting FSS, studies showed interference to noise ratio (I/N) into FSS receivers was -21.9 dB, well below the applicable interference protection criteria (IPC) and significantly less than the interference FSS presently receives from existing FS microwave transmissions¹⁹.

For protecting FS, various studies show LPI and VLP can co-exist with FS without presenting a significant risk of harmful interference. For SP operation, it requires the AFC to automatically (with frequent updates) coordinate license-exempt operations while protecting nearby FS receivers. AFC systems use the RLAN APs' locations and other information to calculate whether any of the FS incumbents in the regulatory licensing database might be affected and then returns to the SP APs the allowed power and frequency parameters.

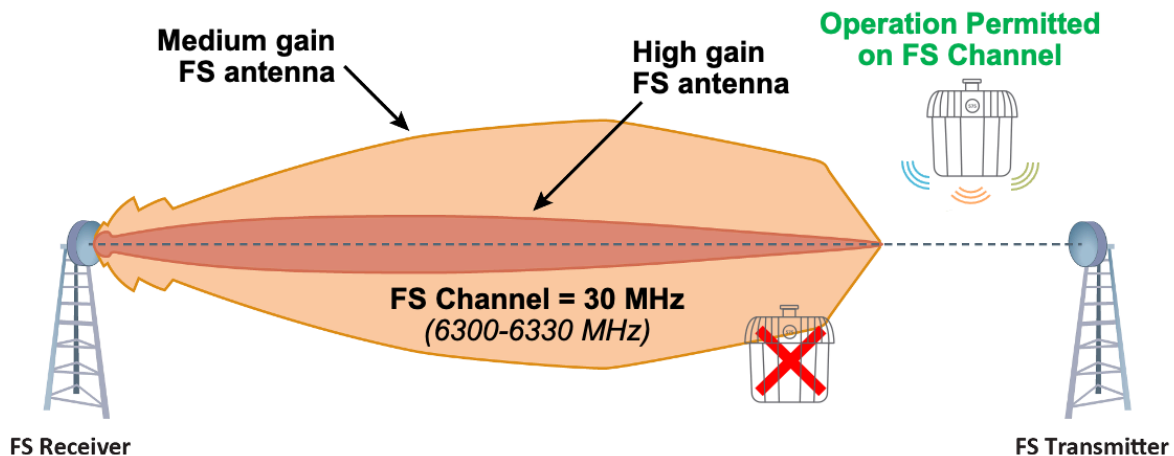


Figure 8 SP AP use AFC to coordinate with FS

¹⁹ RKF Report - [Frequency Sharing for Radio Local Area Networks in the 6 GHz Band](#)

For protecting RAS, an I/N threshold can be used to derive a contour around the RAS site following applicable ITU-R Recommendations²⁰ and taking into account the details of the site and possibly the typical observation schedule. The contours, which can be considered as a coordination zone or exclusion zone, represent a zone which needs to be managed by the regulator. Taking the FCC's requirement as an example, the exclusion zone sizes are based on the radio line-of-sight and determined using 4/3 earth curvature and the following formula:

$$dkm_los = 4.12 * (\text{sqrt}(H_{tx}) + \text{sqrt}(H_{rx})),$$

where H_{tx} is the height of the license-exempt standard power access point or fixed client device and H_{rx} is the height of the radio astronomy antenna in meters above ground level.

The AFC will then exclude the RAS frequencies in its responses to SP APs located within the protection contour.

Depending on each country, portions of this band are also used for public safety and electronic news gathering applications such as TV Broadcast Auxiliary and Cable Relay Services, which are under Mobile Service type. These bands are less suited for Standard Power and AFC coordination because the usage patterns are more dynamic, so Standard Power is not allowed in these frequency ranges.

[AWG-31/INP-95]

6.2.3. Usage of the 5925 – 7125 MHz spectrum

As per the Radio Regulation, 2020, 6 GHz has been allocated for the following services

| S. No. | Frequency Band | Allocated on Primary basis | Region |
|--------|-----------------|---|----------|
| 1 | 5925 – 6700 MHz | FIXED, FIXED SATELLITE (Earth to space), MOBILE | Globally |
| 2 | 6700 – 7075 MHz | FIXED, FIXED SATELLITE (Earth to space), MOBILE | Globally |
| 3. | 7075 – 7125 MHz | FIXED, MOBILE | Globally |

Some administrations were regularly pursuing in various ITU meeting for allocation of mid band spectrum (6 GHz) for IMT

²⁰ Recommendation ITU-R RA.769-2: "Protection criteria used for radio astronomical measurements"

China, Russia and the African Telecommunications Union (ATU) were the main proponents at WRC-19 for the inclusion of Agenda item for WRC-23, for allocation of additional 6 GHz spectrum or IMT.

As per the decision taken in WRC-19 vide Agenda Item 1.2, ITU-R was requested to consider identification of the frequency bands 3 300-3 400 MHz, 3 600-3 800 MHz, 6 425-7 025 MHz, 7 025-7 125 MHz and 10.0-10.5 GHz for International Mobile Telecommunications (IMT), including possible additional allocations to the mobile service on a primary basis.

Six frequency bands were addressed under this agenda item: Band 1 (3 300-3 400 MHz (Region-1)), Band 2 (3 300-3 400 MHz (Region 2)), Band 3 (3 600-3 800 MHz (Region 2)), Band 4 (6 425-7 025 MHz (Region 1)), Band 5 (7 025-7 125 MHz (Globally)) and Band 6 (10.0-10.5 GHz (Region 2)).

Now, following 6 GHz bands are under consideration in the upcoming meeting of WRC-23 likely to be held in Nov, 2023, to consider

Band -4 (6 425 – 7 025 MHz) for Region-1 (Europe, Russia, Africa, Middle East) and

Band-5 (7 025 -7 125 MHz) for the use of IMT.

[AWG-31/INP-56]

6.3 Use cases for Wi-Fi 6E and Wi-Fi 7

With numerous 160 MHz channels in the 6 GHz band, Wi-Fi 6E delivers the fastest Wi-Fi ever, enabling multi-gigabit low latency connections. These high throughput connections are essential to support key use cases today and into the future.

Multi-gigabit Wi-Fi venue capacity

The 6 GHz spectrum allows for a large number of wide band channels. This can help to avoid the excessive collisions and contention for airtime that has become normal in these types of venues. For instance, the Chase Center seats 18064 fans of the National Basketball Association's Golden State Warriors. The arena also hosts concerts, comedians and other events. The Chase Center has hosted numerous sold-out events since its opening in 2019, including every Warriors game and the 2022 NBA Finals, which saw a peak of over 3.80 TB in use, with over 10000 unique devices. While hosting the 2022 NCAA Western Regional, the arena experienced a peak of over 4.05 TB.

Prior to the start of the 2022-2023 NBA season, the Chase Center deployed more than 250 Wi-Fi 6E APs to provide comprehensive Wi-Fi coverage across the arena. The installation will provide fans a more immersive experience.

Industrial and campus network

Because of their inherent features like flexibility, scalability, low latency, deterministic throughput, and ease of installation, Wi-Fi 6E and Wi-Fi 7 will be foundational connectivity

enablers of Industry 4.0. They will be utilized for direct control of machines and other industrial appliances. Managing and monitoring of the rapidly reconfigurable, connected factories will become a reality.

The Health Care sector will also realize significant advancements from Wi-Fi 6E and Wi-Fi 7. With the introduction of the 6 GHz band, guest traffic and enterprise traffic can be carried on different radios and on different channels. Thus, high priority clinical network traffic is not impeded by competing general use traffic – such as guest Internet access. High capacity and low latency Wi-Fi 6E/7 will act as enablers of Advanced Medical tools, devices and smart medical wearables. Monitoring and managing hospitals using these digital technologies, will become more accurate, faster and more reliable.

Public Transport system, high density client devices environment

The transport sector will certainly experience massive improvements in connectivity after the deployment of Wi-Fi in the 6 GHz band. This is evidenced by the recent Wi-Fi network upgrade in Seoul. The average Wi-Fi speed on Seoul subway trains was 71 Mbps, which is significantly lower than the download speeds in Seoul's subway stations, where commuters can expect a blistering 367 Mbps download speed. In 2022, the mobile carriers in Korea installed Wi-Fi 6E routers on board the subway trains, together with mmWave base stations along the tracks for Wi-Fi 6E backhaul and ten mmWave customer premises equipment (CPE) on the trains themselves. According to the Ministry of Science and ICT, with the introduction of Wi-Fi 6E, subway commuters will have a more reliable internet connection, with speeds 10 times faster than the previous Wi-Fi.

Low-latency Wi-Fi calling, video conference and Augmented Reality /Virtual Reality (AR/VR)

Low latency is key to seamless experiences in real-time applications like videoconferencing and gaming. The wideband channels in the 6 GHz band will enable time-sensitive services like high definition audio and video conferencing. It will also support technologies like Virtual Reality, Cloud Gaming and Interactive Applications.

Today, AR and VR are changing both businesses functions and personal entertainment. From education and ecommerce to healthcare and construction, AR/VR can help to reduce training and operational costs and improve the productivity of workers and students.

AR/VR applications require high throughput and sub 10ms levels of latency. A delay in transmission/reception can cause problems for many, including desynchronization between connected devices that can disrupt the expected behaviour. These performance requirement will only be achieved with multiple wideband Wi-Fi channels. Academic analysis shows the significance of 1200 MHz of spectrum availability for supporting AR/VR applications in high-density large-scale scenarios and that 500 MHz of spectrum is not enough to support AR/VR applications²¹²².

²¹ M. Mehrnoush, C. Hu and C. Aldana, "AR/VR Spectrum Requirement for Wi-Fi 6E and Beyond," in IEEE Access, vol. 10, pp. 133016-133026, 2022, doi: 10.1109/ACCESS.2022.3231229.

²² <https://www.intel.com/content/www/us/en/wireless-network/spectrum-needs-of-wi-fi-7.html>

Rural connectivity

Wi-Fi is one of the most economical and fastest ways to provide connectivity in rural areas. The operation in license-exempt frequency bands, higher data rates, ease and lower cost of deployment, and lower operational and maintenance costs are key factors driving the deployment of Wi-Fi and proprietary license-exempt technologies in rural areas around the world.

A high-capacity data link can be established to a central point with a fiber point of presence, a satellite link or a microwave point-to-point backhaul. The point-to-point backhaul may be in-band using the License Exempt 6GHz frequency. This data link could then be reticulated throughout the township via Wi-Fi, delivering the same quality of service experienced in metropolitan areas. This method of broadband access is particularly helpful for remote towns/villages and low-income communities, where there is an acute need for broadband access but not a large enough market to justify licensed spectrum or wired solutions.

[AWG-31/INP-95]

6.4. Channel Arrangements for RLAN:

RLAN (Radio Local Area Network) is a type of wireless communication technology that allows devices to communicate with each other over a local area network (LAN) using radio frequency (RF) signals. RLANs are also commonly referred to as WLANs (Wireless Local Area Networks) or Wi-Fi networks.

The basic operation of RLAN involves a wireless access point (AP) or router that acts as a central hub for wireless devices to connect to the network. The AP is connected to the wired LAN and serves as a bridge between the wired and wireless networks.

When a wireless device, such as a laptop or smart phone, wants to connect to the RLAN, it sends a request to the AP to join the network. The AP authenticates the device and assigns it an IP address. Once the device is connected, it can communicate with other devices on the network and access the Internet.

The RLAN network are secured as using various encryption and authentication protocols, such as WPA2 (Wi-Fi Protected Access II) and 802.1x. These protocols provide protection against unauthorized access and ensure the confidentiality and integrity of the data transmitted over the network.

Radio local area networks (RLANs) systems are quickly emerging as a preferred access technology. RLAN uses different frequency bands for communication, such as the 2.4 GHz and 5 GHz bands. RLAN consortium proposes to introduce unlicensed Wireless point to point and point to multipoint devices into the 5.925 to 7.125 GHz band.

In wireless communication systems, channel assignment refers to a process of allocating radio frequency channels to different users or devices in order to optimize the use of the available spectrum and minimize interference.

There are several approaches to channel assignment in RLANs, including: -

- (a) Fixed channel assignment: In this approach, each AP is assigned a fixed channel that is pre-determined based on factors such as signal strength, interference level, and available bandwidth.
- (b) Dynamic channel assignment: In this approach, the channel assignment is dynamically adjusted based on the current network conditions, such as the number of active users and the level of interference.
- (c) Channel hopping: In this approach, the APs or wireless devices periodically switch channels in order to avoid interference and improve overall network performance.

7. Other technologies used for RLAN networks

[Editor's note: To include other RLAN technologies]

[AWG-31/INP-95]

7.X. Channel Arrangements for WAS:

Wireless Access Systems (WAS) are defined as end-user radio connections to public or private core networks. Technologies in use today for implementing wireless access include cellular, cordless telecommunication, and wireless local area network systems.

WAS typically uses cellular radio frequencies and protocols such as GSM, CDMA or LTE to provide wireless connectivity to devices, and it is often used in mobile phones, tablets, and other mobile devices.

Wireless Access Systems (WAS) are defined as end-user radio connections to public or private core networks. Technologies in use today for implementing wireless access include cellular, cordless telecommunication, and wireless local area network systems.

The basic operation of WAS involves a network of base stations, or cell sites, that are strategically located to provide coverage over a particular area. Each cell site is equipped with one or more antennas that transmit and receive wireless signals to and from mobile devices within the coverage area.

When a mobile device wants to connect to the cellular network, it searches for an available cell site and sends a signal requesting access. The cell site authenticates the device and assigns it a unique identifier, such as a mobile phone number or subscriber identity module (SIM) card. Once the device is connected, it can communicate with other devices on the network and access the Internet or other network services. The wireless signals are encoded and modulated using various techniques to ensure reliable and secure communication.

The WAS network can be secured using various encryption and authentication protocols, such as Advanced Encryption Standard (AES) and Transport Layer Security (TLS). These protocols provide protection against unauthorized access and ensure the confidentiality and integrity of the data transmitted over the network.

WAS uses different wireless protocols and frequencies, depending on the technology used by the cellular network operator. For example, in case of GSM (Global System for Mobile Communications) standard, it uses a combination of time division multiple access (TDMA) and frequency division multiple access (FDMA) to divide the wireless spectrum into channels that can be shared by multiple users.

Overall, WAS provides a convenient and reliable way for mobile devices to connect and communicate over a wireless network, and it is widely used in cellular networks around the world.

Channel assignment in WAS (Wireless Access System) is the process of assigning frequencies or channels to different base stations, or cell sites, in a cellular network to avoid interference and ensure efficient use of the available wireless spectrum. The goal of channel assignment is to minimize the number of channels used while ensuring that each cell site has sufficient channels to serve its users. This is because the wireless spectrum is a limited resource, and it must be shared among all the cell sites in the network.

There are different channel assignment strategies that can be used in WAS, depending on the technology used by the cellular network operator. One common approach is the fixed channel allocation (FCA) strategy, where a fixed set of channels is assigned to each cell site, and the channels are reused across the network.

Another approach is the dynamic channel allocation (DCA) strategy, where channels are dynamically allocated to cell sites based on the traffic load and channel availability. This approach can help to optimize the use of the available spectrum and improve network efficiency.

In WAS, channel assignment can also be influenced by other factors such as the physical environment, the distance between cell sites, and the number of users in a particular area. In urban areas with high user density, for example, smaller cell sites may be used to provide better coverage and capacity, and more channels may be assigned to these sites to accommodate the higher traffic.

Overall, channel assignment is a critical aspect of WAS network design and optimization, and it requires careful planning and management to ensure optimal network performance and user experience.

[AWG-31/INP-56Rev.1] [AWG-31/INP-95]

8. Summary

[AWG-31/INP-95]

Wi-Fi is optimized for high performance indoor, and therefore delivers the bulk of the world's data traffic, including most data traffic on mobile devices. Demand for Wi-Fi will continue to grow with increased fiber deployments and cellular generations.

Wi-Fi 6E is a resounding success and by 2024, there will be billions of devices installed globally able to operate from 5.925 to 7.125 GHz. Only countries that allow Wi-Fi access to the entire 6 GHz spectrum range will be most benefited.

Wi-Fi 7 and Wi-Fi 8 will depend on 6GHz access, and 320 MHz channels will be optimized for demanding emerging use cases.

6 GHz frequency band from 5925 – 7125 MHz is perfectly suited for Wi-Fi to continue to deliver the connectivity users need, there is no alternative spectrum for Wi-Fi, and 6 GHz is unsuitable for IMT.

As many countries in all regions are deploying Wi-Fi in 6 GHz, so 5G networks are not feasible in 6 GHz. Therefore, frequency harmonization for IMT/5G cannot be achieved in 6 GHz, even no interoperability. Market fragmentation precludes economies of scale, which is necessary for a viable 5G ecosystem in 6 GHz, as massive investments are needed to design and produce cellular chipsets for 6 GHz, to integrate chipsets into devices and bring them to market, to deploy IMT technology network and to operate IMT network. At present, no ecosystem is available for the IMT in 6 GHz band nor likely to come in near future.

IAFI through this new report would like to bring the issue for the consideration of the APT member countries to support the issue in the upcoming AWG/WRC-23 to globally harmonization the 6 GHz frequency band from 5925 -7125 MHz, total 1200 MHz spectrum, as unlicensed frequency band for Wi-Fi.

Annex 1

Technology features in IEEE 802.11ax (Wi-Fi 6/6E) and IEEE 802.11be (Wi-Fi 7)

1. IEEE 802.11ax (Wi-Fi 6/6E)

IEEE 802.11ax, officially marketed by the Wi-Fi Alliance as Wi-Fi 6 (2.4 GHz and 5 GHz) and Wi-Fi 6E (6 GHz), is an IEEE standard for wireless local-area networks (WLANs) and the successor of 802.11ac. It is also known as High Efficiency Wi-Fi, for the overall improvements to Wi-Fi 6 clients in dense environments. The technology is designed to operate in license-exempt bands between 1 and 7.125 GHz, including the 2.4 and 5 GHz bands already in common use as well as the much wider 6 GHz band.

There are a number of features in IEEE 802.11ax with the main design goal to enhance throughput-per-area in high-density scenarios, such as corporate offices, shopping malls and dense residential apartments.

1.1 Downlink and uplink OFDMA

OFDMA is one of the more complex features in 802.11ax. It allows a single transmission (for downlink OFDMA, the access point transmits) to be split by frequency within a channel, such that different frames addressed to different client devices use groups of subcarriers. Uplink OFDMA is equivalent to downlink OFDMA, but in this case multiple client devices transmit simultaneously, on different groups of subcarriers within the same channel.

In 802.11ac, Wi-Fi channel was broken down into a collection of smaller OFDM sub-channels and at any given point in time, a single user is allocated all those sub-carriers in each PPDU. However, this allocation method does not provide the best spectrum efficiency as each data traffic may not necessarily require the full bandwidth to transmit. In 802.11ax OFDMA (802.11ax) is introduced to enhance the efficiency, individual groups of subcarriers are individually allocated to clients as resource units on a per-PPDU basis.

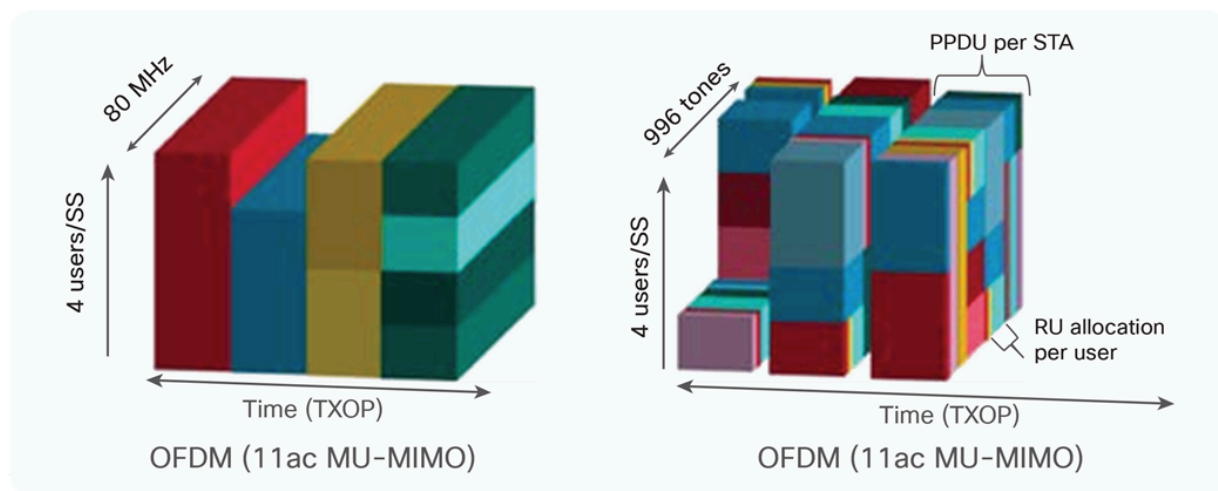


Figure 9 OFDM vs OFDMA

1.2 Downlink and uplink multi-user MIMO

The downlink version extends an existing 802.11ac feature where an access point determines that multipath conditions allow it to send, in a single time-interval, frames to different client devices. 802.11ax increases the size of downlink MU-MIMO groups, allowing more efficient operation. Uplink multi-user MIMO is a new addition to 802.11ax, but it is deferred to wave 2: like uplink OFDMA, the access point must coordinate the simultaneous transmissions of multiple clients.

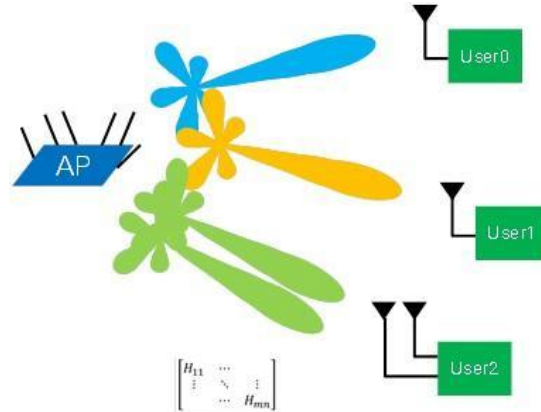


Figure 10 AP using MU-MIMO beamforming to serve multiple users located in spatially diverse positions

1.3 Transmit beamforming

This is another existing feature where an access point uses a number of transmit antennas to land a local maximum signal on a receiver's antennas. It improves data-rates and extends range.

1.4 Higher order modulation

802.11a/g introduced 64-QAM, and 802.11ac 256-QAM: in 802.11ax, the highest-order modulation is extended to 1024-QAM. This increases peak data-rates under good conditions (high SNR). OFDM symbols, subcarrier spacing and FFT size are all changed to allow efficient operation of small OFDMA subchannels: these changes allow an increase in the length of guard interval without loss of symbol efficiency.

Table 3 802.11ax selected rates (Mbps, short GI)

| MCS | Modulation & Rate | 20 MHz 1x SS | 20 MHz 2x SS | 20 MHz 4x SS | 20 MHz 8x SS | 40 MHz 1x SS | 40 MHz 2x SS | 40 MHz 4x SS | 40 MHz 8x SS | 80 MHz 1x SS | 80 MHz 2x SS | 80 MHz 4x SS | 80 MHz 8x SS |
|-----|-------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| 0 | BPSK 1/2 | 8.6 | 17.2 | 34.4 | 68.8 | 17.2 | 34.4 | 68.8 | 137.6 | 36.0 | 72.1 | 144.1 | 288.2 |
| 1 | QPSK 1/2 | 17.2 | 34.4 | 68.8 | 137.6 | 34.4 | 68.8 | 137.6 | 275.3 | 72.1 | 144.1 | 288.2 | 576.5 |
| 2 | QPSK 3/4 | 25.8 | 51.6 | 103.2 | 206.5 | 51.6 | 103.2 | 206.5 | 412.9 | 108.1 | 216.2 | 432.4 | 864.7 |
| 3 | 16-QAM 1/2 | 34.4 | 68.8 | 137.6 | 275.3 | 68.8 | 137.6 | 275.3 | 550.6 | 144.1 | 288.2 | 576.5 | 1,152.9 |
| 4 | 16-QAM 3/4 | 51.6 | 103.2 | 206.5 | 412.9 | 103.2 | 206.5 | 412.9 | 825.9 | 216.2 | 432.4 | 864.7 | 1,729.4 |
| 5 | 64-QAM 1/2 | 68.8 | 137.6 | 275.3 | 550.6 | 137.6 | 275.3 | 550.6 | 1,101.2 | 288.2 | 576.5 | 1,152.9 | 2,305.9 |
| 6 | 64-QAM 3/4 | 77.4 | 154.9 | 309.7 | 619.4 | 154.9 | 309.7 | 619.4 | 1,238.8 | 324.3 | 648.5 | 1,297.1 | 2,594.1 |
| 7 | 64 QAM 5/6 | 86.0 | 172.1 | 344.1 | 688.2 | 172.1 | 344.1 | 688.2 | 1,376.5 | 360.3 | 720.6 | 1,441.2 | 2,882.4 |
| 8 | 256-QAM 3/4 | 103.2 | 206.5 | 412.9 | 825.9 | 206.5 | 412.9 | 825.9 | 1,651.8 | 432.4 | 864.7 | 1,729.4 | 3,458.8 |
| 9 | 256-QAM 5/6 | 114.7 | 229.4 | 458.8 | 917.6 | 229.4 | 458.8 | 917.6 | 1,835.3 | 480.4 | 960.8 | 1,921.6 | 3,843.1 |
| 10 | 1024-QAM 3/4 | 129.0 | 258.1 | 516.2 | 1,032.4 | 258.1 | 516.2 | 1,032.4 | 2,064.7 | 540.4 | 1,080.9 | 2,161.8 | 4,323.5 |
| 11 | 1024-QAM 5/6 | 143.4 | 286.8 | 573.5 | 1,147.1 | 286.8 | 573.5 | 1,147.1 | 2,294.1 | 600.5 | 1,201.0 | 2,402.0 | 4,803.9 |

1.5 Outdoor operation

A number of features improve outdoor performance. The most important is a new packet format where the most sensitive field is now repeated for robustness. Other features that contribute to better outdoor operation include longer guard intervals and modes that introduce redundancy to allow for error recovery.

1.6 Reduced power consumption

Existing power-save modes are supplemented with new mechanisms allowing longer sleep intervals and scheduled wake times. An 802.11ax AP can negotiate with the participating STAs the use of the Target Wake Time (TWT) function to define a specific time or set of times for individual stations to access the medium. The STAs and the AP exchange information that includes an expected activity duration. This way the AP controls the level of contention and overlap among STAs needing access to the medium. 802.11ax STAs may use TWT to reduce energy consumption, entering a sleep state until their TWT arrives. Furthermore, an AP can additionally devise schedules and deliver TWT values to STAs without individual TWT agreements between them.

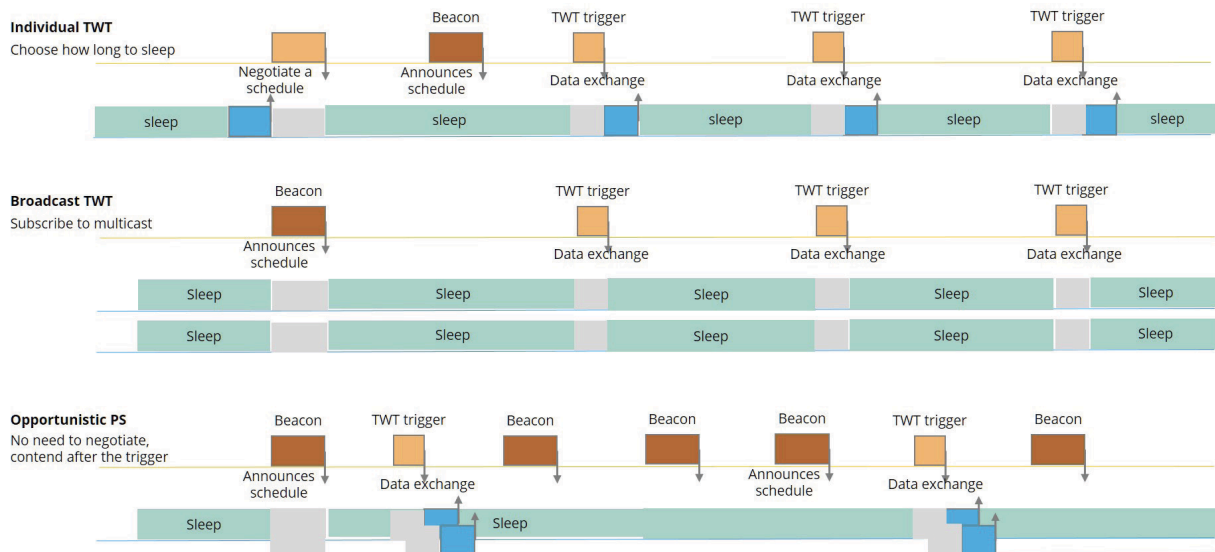


Figure 11 TWT power-save options in 802.11ax

Also, for IoT devices, a 20MHz-channel-only mode is introduced, allowing for simpler, less powerful chips that support only that mode.

1.7 Spatial re-use with color codes

To improve the system level performance and the efficient use of spectrum resources in dense deployment scenarios, the 802.11ax standard implements a spatial reuse technique. STAs can identify signals from overlapping Basic Service Sets (BSS) and make decisions on medium contention and interference management based on this information.

When an STA that is actively listening to the medium detects an 802.11ax frame, it checks the BSS color bit or MAC address in the MAC header. If the BSS color in the detected PPDU is the same color as the one that its associated AP has already announced, then the STA considers that frame as an intra-BSS frame.

However, if the detected frame has a different BSS color than its own, then the STA considers that frame as an inter-BSS frame from an overlapping BSS. The STA then treats the medium as BUSY only during the time it takes the STA to validate that the frame is from an inter-BSS, but not longer than the time indicated as the length of the frame's payload.

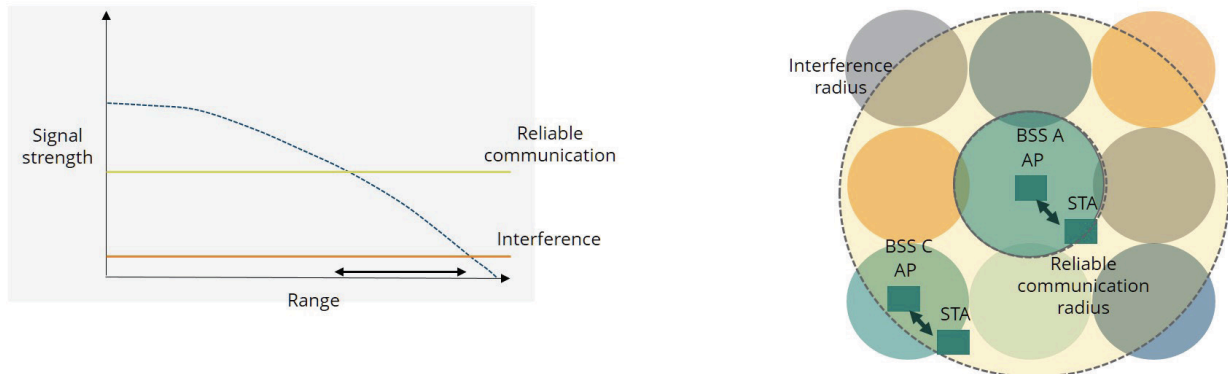


Figure 12 BSS coloring: co-channel interference

BSS coloring works by distinguishing between “same BSS” and “distant BSS” transmissions and applying different CSMA/CA power thresholds. This allows simultaneous transmissions in the different cells, as, in addition to two power thresholds, each client device keeps two network allocation vectors (NAV's) which tell it how long the medium will be occupied.

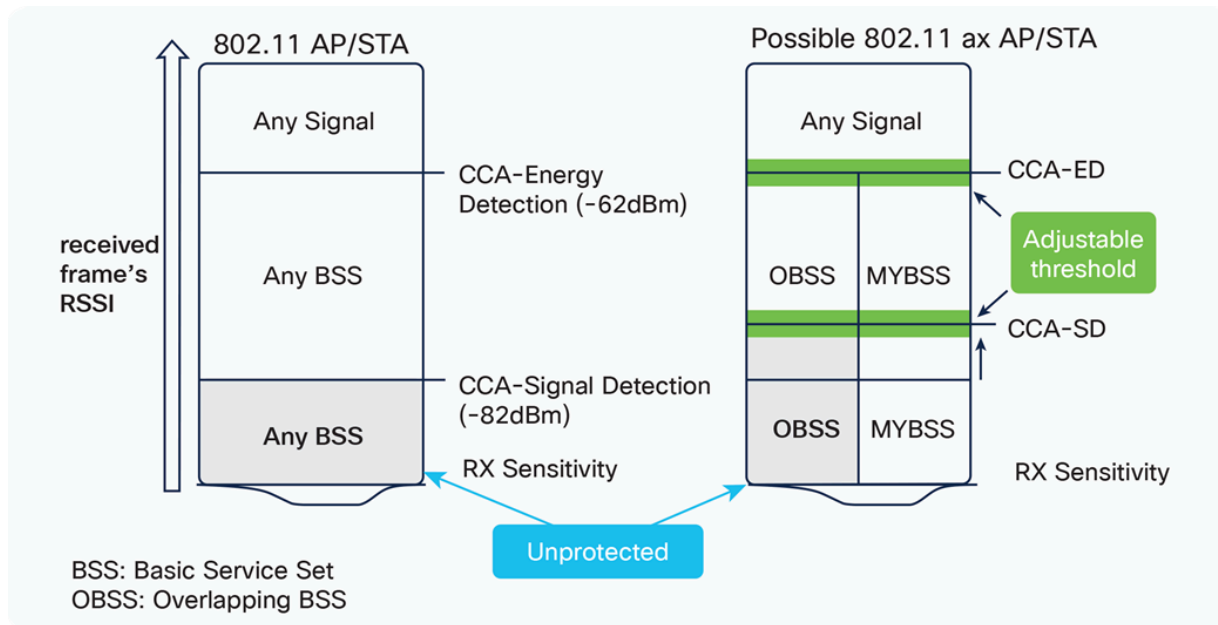


Figure 13 OBSS and BSS Color operation

2. IEEE 802.11be (Wi-Fi 7)

IEEE 802.11be, dubbed Extremely High Throughput (EHT), is the next amendment of the IEEE 802.11 standard, which will be designated Wi-Fi 7. Wi-Fi 7 features will expand upon the innovation of Wi-Fi 6 and Wi-Fi 6E, focus on WLAN indoor and outdoor operation with stationary and pedestrian speeds in the 2.4, 5, and 6 GHz frequency bands.

Development of the 802.11be amendment is ongoing, with an initial draft in March 2021, and a final version expected by early 2024.

2.1 320 MHz Channels & 4K QAM

Wi-Fi 7 enables significantly faster speeds by packing more data into each transmission. 320 MHz channels are twice the size of previous Wi-Fi generations. 4K QAM (Quadrature Amplitude Modulation) enables each signal to more densely embed greater amounts of data compared to the 1K QAM with Wi-Fi 6/6E.

The benefit for a typical Wi-Fi 7 laptop is a potential maximum data rate of almost 5.8 Gbps. This is 2.4X faster than the 2.4 Gbps possible with Wi-Fi 6/6E and could easily enable high quality 8K video streaming or reduce a massive 15 GB file download to roughly 25 seconds vs. the one minute it would take with the best legacy Wi-Fi technology.

2.2 Multi-Link Operation & Deterministic Latency

While legacy Wi-Fi provides access to multiple wireless bands, devices typically choose only one band to make transmissions—switching to another if conditions change. With MLO (Multi-Link Operation), Wi-Fi 7 devices can simultaneously connect on multiple bands. This

enables faster speeds through aggregation. Or multiple bands can be used concurrently to share redundant/unique data for improved reliability with ultra-low and precise latencies.

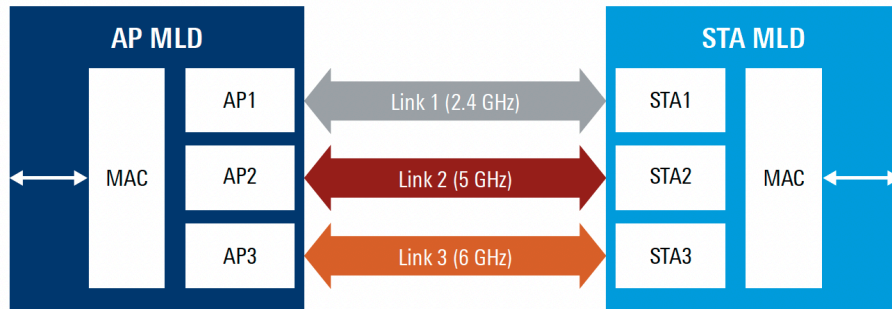


Figure 14 Restricted target wake time principle

2.3 Multi Resource Units (RU) and Puncturing

Multi-RU Puncturing improves the usage of transmission channels by increasing throughput and reducing latency when multiple users are present. It enables the use of multiple resource units, while puncturing is available to avoid interference with incumbent services, the congestion caused by interference and to maintain high transmission speeds.

Puncturing can take 80 MHz and 160 MHz Wi-Fi channels and slice or bond them in increments of 20 MHz. To help avoid the congestion caused by interference, and it can maintain transmission speeds in multi-user scenarios without dropping the signal.

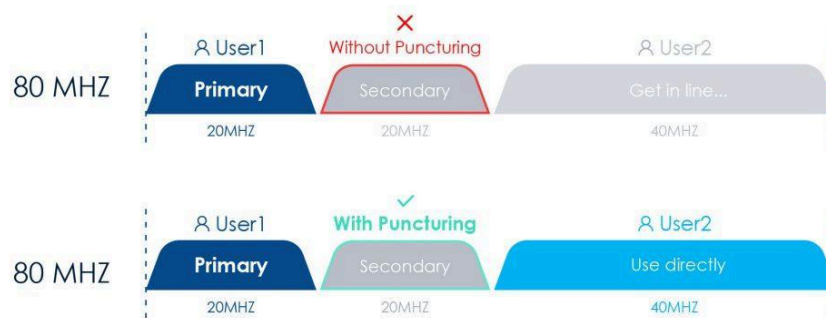


Figure 15 Puncturing improves spectrum efficiency

2.4 Multi-AP Operation

Wi-Fi 7 will have a coordinated transmission between multiple APs. It might also be worthwhile to coordinate beamforming between adjacent APs by forming spatial radiation nulls (null beams) to non-associated STAs in the neighborhood, which allows simultaneous transmission at the same frequency resource. The probably most complex feature under discussion is the joined

transmission (c) where multiple APs transmit/receive to/from one or multiple stations using the same frequency in a distributed MIMO scheme.

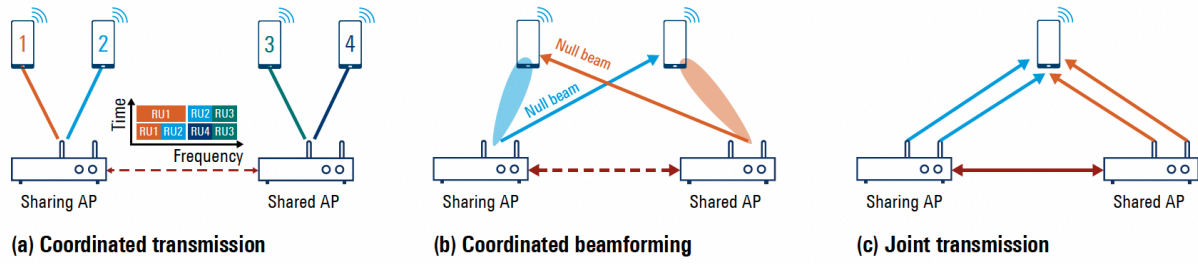


Figure 16 Multi-AP coordination feature principles

Other features

Annex 2

5GHz (802.11a/h/j/n/ac/ax)

5 GHz (802.11a/h/j/n/ac/ax)

| Channel | Center Freq | Frequency Range | 10 | 20 | 40 | 80 | 160 MHz | Australia | Japan | India | Singapore | China | Korea | New Zealand | Vietnam | Indonesia | |
|---------|-------------|-----------------|-----|----|----|----|---------|-----------------|---------|-------|-----------|---------|---------|-------------|---------|-----------|--|
| | (MHz) | (MHz) | MHz | | | | | | | | | | | | | | |
| 7 | 5035 | 5030-5040 | 10 | | | | | No | No | No | No | No | No | No | No | No | |
| 8 | 5040 | 5030-5050 | | 20 | | | | | | | | | | | | | |
| 9 | 5045 | 5040-5050 | 10 | | | | | | | | | | | | | | |
| 11 | 5055 | 5050-5060 | 10 | | | | | | | | | | | | | | |
| 12 | 5060 | 5050-5070 | | 20 | | | | | | | | | | | | | |
| 16 | 5080 | 5070-5090 | | 20 | | | | | | | | | | | | | |
| 32 | 5160 | 5150-5170 | | 20 | | | | Indoors | Indoors | Yes | Yes | Indoors | Indoors | Indoors | Indoors | Indoors | |
| 34 | 5170 | 5150-5190 | | | 40 | | | | | | | | | | | | |
| 36 | 5180 | 5170-5190 | | 20 | | | | | | | | | | | | | |
| 38 | 5190 | 5170-5210 | | | 40 | | | | | | | | | | | | |
| 40 | 5200 | 5190-5210 | | 20 | | | | | | | | | | | | | |
| 42 | 5210 | 5170-5250 | | | | 80 | | | | | | | | | | | |
| 44 | 5220 | 5210-5230 | | 20 | | | | | | | | | | | | | |
| 46 | 5230 | 5210-5250 | | | 40 | | | | | | | | | | | | |
| 48 | 5240 | 5230-5250 | | 20 | | | | | | | | | | | | | |
| 50 | 5250 | 5170-5330 | | | | | 160 | Indoors/DFS/TPC | | | | | | | No | | |
| 52 | 5260 | 5250-5270 | | 20 | | | | Indoors | | | | | | | | | |
| 54 | 5270 | 5250-5290 | | | 40 | | | | | | | | | | | | |
| 56 | 5280 | 5270-5290 | | 20 | | | | | | | | | | | | | |
| 58 | 5290 | 5250-5330 | | | | 80 | | | | | | | | | | | |
| 60 | 5300 | 5290-5310 | | 20 | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | | | | |
|-----|------|---------------|--|--------|--------|--------|-----|-----------------|--|--|----|--|---------|--|--|----|--|
| 62 | 5310 | 5290-5 330 | | 4 0 | | | | | | | | | | | | | |
| 64 | 5320 | 5310-5 330 | | 2 0 | | | | | | | | | | | | | |
| 68 | 5340 | 5330-5 350 | | 2 0 | | | | Unk now n | | | | | | | | | |
| 96 | 5480 | 5470-5 490 | | 2 0 | | | | DFS/TPC | | | No | | DFS/TPC | | | No | |
| 100 | 5500 | 5490-5 510 | | 2 0 | | | | Yes | | | | | | | | | |
| 102 | 5510 | 5490-5 530 | | | 4 0 | | | | | | | | | | | | |
| 104 | 5520 | 5510-5 530 | | 2 0 | | | | | | | | | | | | | |
| 106 | 5530 | 5490-5 570 | | | | 8 0 | | | | | | | | | | | |
| 108 | 5540 | 5530-5 550 | | 2 0 | | | | | | | | | | | | | |
| 110 | 5550 | 5530-5 570 | | | 4 0 | | | | | | | | | | | | |
| 112 | 5560 | 5550-5 570 | | 2 0 | | | | | | | | | | | | | |
| 114 | 5570 | 5490-5 650 | | | | | 160 | No | | | | | | | | | |
| 116 | 5580 | 5570-5 590 | | 2 0 | | | | | | | | | | | | | |
| 118 | 5590 | 5570-5 610 | | | 4 0 | | | No | | | | | | | | | |
| 120 | 5600 | 5590-5 610 | | 2 0 | | | | | | | | | | | | | |
| 122 | 5610 | 5570-5 650 | | | | 8 0 | | | | | | | | | | | |
| 124 | 5620 | 5610-5 630 | | 2 0 | | | | | | | | | | | | | |
| 126 | 5630 | 5610-5 650 | | | 4 0 | | | | | | | | | | | | |
| 128 | 5640 | 5630-5 650 | | 2 0 | | | | | | | | | | | | | |
| 132 | 5660 | 5650-5 670 | | 2 0 | | | | DFC /TPC | | | | | | | | | |
| 134 | 5670 | 5650-5 690 | | | 4 0 | | | | | | | | | | | | |
| 136 | 5680 | 5670-5 690 | | 2 0 | | | | | | | | | | | | | |
| 138 | 5690 | 5650-5 730 | | | | 8 0 | | No | | | | | | | | | |
| 140 | 5700 | 5690-5 710 | | 2 0 | | | | Indo ors | | | | | | | | | |
| 142 | 5710 | 5690-5 730 | | | 4 0 | | | No | | | | | | | | | |
| 144 | 5720 | 5710-5 730 | | 2 0 | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | | | | |
|----------------|--------------------|------------------------|-----------|-----------|-----------|-----------|------------|------------------|--------------|--------------|------------------|--------------|--------------|--------------------|----------------|------------------|----|
| 149 | 5745 | 5735-5755 | | 20 | | | | | Yes | Indoors | Yes | Indoors | Yes | Yes | | | |
| 151 | 5755 | 5735-5775 | | | 40 | | | | | | | | | | | | |
| 153 | 5765 | 5755-5775 | | 20 | | | | | | | | | | | | | |
| 155 | 5775 | 5735-5815 | | | | 80 | | | | | | | | | | | |
| 157 | 5785 | 5775-5795 | | 20 | | | | | | | | | | | | | |
| 159 | 5795 | 5775-5815 | | | 40 | | | | | | | | | | | | |
| 161 | 5805 | 5795-5815 | | 20 | | | | | | | | | | | | | |
| 163 | 5815 | 5735-5895 | | | | | 160 | No | No | No | No | No | No | No | | | |
| 165 | 5825 | 5815-5835 | | 20 | | | | Yes | Indoors | Yes | Indoors | Yes | Yes | | | | |
| 167 | 5835 | 5815-5855 | | | 40 | | | No | No | No | No | No | No | | | | |
| 169 | 5845 | 5835-5855 | | 20 | | | | | | | | | | | | | |
| 171 | 5855 | 5815-5895 | | | | 80 | | | | | | | | | | | |
| 173 | 5865 | 5855-5875 | | 20 | | | | | | | | | | | | | |
| 175 | 5875 | 5855-5895 | | | 40 | | | No | | | | | | | | | |
| 177 | 5885 | 5875-5895 | | 20 | | | | | | | | | | | | | |
| 180 | 5900 | 5895-5905 | 10 | | | | | | | | | | | | | | |
| 182 | 5910 | 5905-5915 | 10 | | | | | No | Regd req | | No | No | No | No | No | No | No |
| 183 | 5915 | 5905-5925 | | 20 | | | | | | | | | | | | | |
| Channel | Center Freq | Frequency Range | 10 | 20 | 40 | 80 | 160 | Australia | Japan | India | Singapore | China | Korea | New Zealand | Vietnam | Indonesia | |
| | (MHz) | (MHz) | | | | | | | | | | | | | | | |

Annex 3

Questionnaire Responses

[Editor's note: consider parts of the Questionnaire compilation to be included in an Annex]

Questionnaire

Question 1: What is/are current frequency ranges for license-exempt (in some countries also known as general use license, class license) WAS/RLAN technology to use in your country?

Answer:

| | Frequency range | Maximum EIRP | Maximum PSD | Use condition (s) | Applicable Technical Standard (s) |
|----------|-------------------|-----------------|--|---|---|
| Bhutan | | | | | |
| Nepal | 2.4 – 2.4835 GHz | 36 dBm | | No exclusive right, shall be used in non-protection and shared basis. | |
| | 5.725 – 5.825 GHz | 36 dBm | | No exclusive right, shall be used in non-protection and shared basis. | |
| Thailand | 2400-2500 MHz | 100 mW | | Indoor/outdoor | EN 300 328 FCC Part 15.247 |
| | 5150-5350 MHz | 200 mW | | Indoor DFS and TPC are required in 5250-5350 MHz | EN 301 893 FCC Part 15.407 |
| | 5470-5725 MHz | 1W | | Indoor/outdoor DFS and TPC are required in 5470-5725 MHz | EN 301 893 FCC Part 15.407 |
| | 5725-5850 MHz | 1W | | Indoor/outdoor | EN 302 502 FCC Part 15.247 FCC Part 15.407 |
| | 5925-6425 MHz | 25 mW 250 mW | 1.25 mW/MHz 12.5 mW/MHz | Indoor/outdoor Indoor | FCC Part 15.407 |
| Japan | 5 150-5 250 MHz | - | Indoor: 20 MHz: 10 mW/MHz 40 MHz: 5 mW/MHz 80 MHz: 2.5 mW/MHz 160 MHz: 1.25 mW/MHz Inside automobiles: 20MHz: 2 mW/MHz 40MHz: 1 mW/MHz 80MHz: 0.5 mW/MHz | Indoor or inside automobiles | Article 49-20, Paragraph 3 of the Radio Equipment Regulations |
| | 5 250-5 350 MHz | - | 20 MHz: 10 mW/MHz 40 MHz: 5 mW/MHz 80 MHz: 2.5 mW/MHz | DFS required, indoor only, | Article 49-20, Paragraph 3 of the Radio Equipment Regulations |

| | | | | | |
|-----------|----------------------|------------------------------|--|--|---|
| | | | 160 MHz: 1.25 mW/MHz | TPC or reduced transmission power by 3 dB | |
| | 5 470-5 730 MHz | - | 20 MHz: 50 mW/MHz 40 MHz: 25 mW/MHz 80 MHz: 12.5 mW/MHz 160 MHz: 6.25 mW/MHz | DFS required, not allowed in the sky, TPC or reduced transmission power by 3 dB | Article 49-20, Paragraph 3 of the Radio Equipment Regulations |
| | 5 925-6 425 MHz | 25 mW (VLP), 200 mW (LPI) | VLP: 20 MHz: 1.25 mW/MHz 40 MHz: 0.625 mW/MHz 80 MHz: 0.3125 mW/MHz 160 MHz: 0.15625 mW/MHz LPI: 20 MHz: 10 mW/MHz 40 MHz: 5 mW/MHz 80 MHz: 2.5 mW/MHz 160 MHz: 1.25 mW/MHz | Indoor only for LPI | Article 49-20, Paragraph 4 of the Radio Equipment Regulations |
| Malaysia | 2400 MHz to 2500 MHz | 500 mW | - | - | i. Class Assignment for Short-range Radiocommunication Device ii. Technical Code for the Specification for Short Range Devices – Specifications Note: The use of frequency band(s) for devices that have been listed in the Class Assignment are subject to the requirements and conditions as specified in the Class Assignment. The latest Class Assignment document can be found in this URL: http://www.mcmc.gov.my/en/spectrum/assignment-of-spectrum/class-assignment . |
| | 5150 MHz to 5250 MHz | 200 mW | - | Outdoor use only | |
| | | 1 W | | Indoor use only | |
| | 5250 MHz to 5350 MHz | 1 W | 10 mW/MHz | •Indoor use only •The devices shall use Dynamic Frequency Selection (DFS) and Transmitter Power Control (TPC) | |
| | 5470 MHz to 5650 MHz | 1 W | 10 mW/MHz | The devices shall use Dynamic Frequency Selection (DFS) and Transmitter Power Control (TPC) | |
| | 5725 MHz to 5875 MHz | 1 W | - | - | |
| | 5925 MHz to 6425 MHz | 25 mW | 1.25 mW/MHz (10 mW/MHz for narrowband usages) | Indoor and outdoor use | |
| | | 200 mW | 10 mW/MHz | Indoor use only | |
| Australia | 2400–2483.5 MHz | 500 mW | | Either: (a) the transmitter must meet the requirements of ETSI EN 300 328; or | |

| | | | | | |
|--|-----------------|--|--|--|--|
| | | | | (b) a minimum of 15 hopping frequencies must be used. | |
| | 2400–2483.5 MHz | 4 W | | A minimum of 75 hopping frequencies must be used. | |
| | 5150–5250 MHz | 200 mW (averaged over the entire transmission burst) | 10mW/MHz or 40µW/4kHz for narrowband use | (a) The transmitter must only be used indoors. (b) The power spectral density of a transmitter with a bandwidth greater than or equal to 1 MHz must not exceed 10 mW EIRP per MHz. (c) The power spectral density of a transmitter with a bandwidth less than 1 MHz must not exceed 40 µW EIRP per 4 kHz. | |
| | 5250–5350 MHz | 200 mW (averaged over the entire transmission burst) | 10mW/MHz or 40µW/4kHz for narrowband use | (a) The transmitter must only be used indoors. (b) The power spectral density of a transmitter with a bandwidth greater than or equal to 1 MHz must not exceed 10 mW EIRP per MHz. (c) The power spectral density of a transmitter with a bandwidth less than 1 MHz must not exceed 40 µW EIRP per 4 kHz. (d) The transmitter must use Dynamic Frequency Selection (DFS). (e) If the maximum EIRP is greater than 100 mW, the transmitter must use Transmit Power Control (TPC). | |

| | | | | | |
|--|---|--|-------------------|--|--|
| | <p>(a) 5470–5600</p> <p>(b) 5650–5725</p> | <p>1 W (averaged over the entire transmission burst)</p> | <p>50mW/MHz</p> | <p>(a) The maximum radiated mean power density must not exceed 50 mW/MHz EIRP in any 1 MHz band.</p> <p>(b) The transmitter must use Dynamic Frequency Selection (DFS).</p> <p>(c) If the maximum EIRP is greater than 500 mW, the transmitter must use Transmit Power Control (TPC).</p> | |
| | <p>5925-6425 MHz</p> | <p>250 mW</p> | <p>12.5mW/MHz</p> | <p>(a) The transmitter must only be used indoors.</p> <p>(b) The power spectral density of the transmitter must not exceed 12.5 mW EIRP per MHz.</p> <p>(c) Contention-based protocols for multiple access, such as Carrier Sense Multiple Access (CSMA) or Multiple Access Collision Avoidance (MACA), must be implemented.</p> | |
| | <p>5925-6425 MHz</p> | <p>25 mW</p> | <p>1.25mW/MHz</p> | <p>(a) The power spectral density of the transmitter must not exceed 1.25 mW EIRP per MHz.</p> <p>(b) Contention-based protocols for multiple access, such as Carrier Sense Multiple Access (CSMA) or Multiple Access Collision Avoidance (MACA), must be implemented.</p> | |

| | | | | | |
|-----------|-------------------------------|--|--------------------------------------|---|---|
| Indonesia | 2400 - 2483.5 MHz | Indoor: 27 dBm Outdoor: 36 dBm | - | Indoor (maximum bandwidth 40 MHz) Outdoor (maximum bandwidth 20 MHz) (access/backhaul) | Director General SDPPI Regulation No.2 of 2019 |
| | 5150 - 5250 MHz | 23 dBm | - | Indoor (maximum bandwidth 80 MHz) (access) | Director General SDPPI Regulation No.2 of 2019 |
| | 5250 - 5350 MHz | 23 dBm | - | Indoor (maximum bandwidth 80 MHz) (access) | Director General SDPPI Regulation No.2 of 2019 |
| | 5150 - 5350 MHz | 23 dBm | - | Indoor (maximum bandwidth 160 MHz) (access) | The technical standard is still being developed |
| | 5725 - 5825 MHz | Indoor: 23 dBm Outdoor: 36 dBm | - | Indoor (maximum bandwidth 80 MHz) Outdoor (maximum bandwidth 20 MHz) (access/backhaul) | Director General SDPPI Regulation No.2 of 2019 |
| | 57 - 64 GHz | 40 dBm | - | Indoor (maximum bandwidth 2.16 GHz) (access) | The technical standard for RLAN 60 GHz is still being developed |
| India | 2400-2483.5 MHz ²³ | 36 dBm | | Non-interference, non-protection and shared (non-exclusive) basis. | |
| | 5.150-5.250 GHz ²⁴ | 36 dBm 21 dBm 53 dBm 30 dBm | 17 dBm/MHz 11 dBm/MHz | Access point: ≤ 6 dBi antenna gain & 30 dBm conducted power. Above 30° elevation (outdoor) Fixed point to point access point: ≤ 23 dBi antenna gain & 30 dBm conducted power. | |

²³<https://dot.gov.in/spectrummanagement/delicensing-24-24835-ghz-band-gsr-45-e-5150-5350-ghz-gsr-46-e-and-5725-5875-ghz>

²⁴ <https://dot.gov.in/spectrummanagement/license-exemption-5-ghz-gsr-1048e-dated-22102018>

| | | | | | |
|---------|------------------------------------|--|----------------|---|--------------------|
| | | | | Client/portable mobile device: ≤ 6 dBi antenna gain & 250 mW conducted power | |
| | 5.250-5.350 GHz 5.470-5.725 GHz | 30 dBm | 11 dBm/MHz | Access point: ≤ 6 dBi antenna gain & 250 mW conducted power or 11dBm + 10 log B, whichever is less, where 'B' is the emission bandwidth in MHz. | |
| | 5.725-5.875 GHz | 36 dBm 53 dBm | 30 dBm/500 kHz | Access point: ≤ 6 dBi antenna gain & 30 dBm conducted power. Fixed point to point access point: ≤ 23 dBi antenna gain & 30 dBm conducted power. | |
| Vietnam | 2400 ÷ 2483,5 MHz | ≤ 200 mW EIRP (for equipment using FHSS modulation) | | Common use condition (for all RLAN bands): Organizations and individuals deploy and use WLAN/RLAN equipment that need to comply with laws and regulations on telecommunications, information security and data protection. | QCVN 54:2020/BTTTT |
| | | ≤ 10 mW/1 MHz EIRP (for equipment using non-FHSS modulation) | | | |
| | 5150 ÷ 5250 MHz | ≤ 200 mW EIRP | | Using in an indoor environment (Indoor use) or an environment with electromagnetic wave shielding (ie: in car) | QCVN 65:2013/BTTTT |
| | 5250 ÷ 5350 MHz | ≤ 200 mW EIRP (for equipment being adjustable power) | | The device must be capable of dynamic frequency selection (DFS) | QCVN 65:2013/BTTTT |
| | | ≤ 100 mW EIRP (for equipment being non-adjustable power) | | The device must be capable of dynamic frequency selection (DFS) | |
| | 5470 ÷ 5725 MHz | ≤ 1 W EIRP (for equipment) | | The device must be capable of dynamic frequency selection (DFS) | QCVN 65:2013/BTTTT |

| | | | | | |
|-------|-------------------|---|--|--|---|
| | | being adjustable power) | | | |
| | | ≤ 500 mW EIRP (for equipment being non-adjustable power) | | The device must be capable of dynamic frequency selection (DFS) | |
| | 5725 ÷ 5850 MHz | ≤ 1 W EIRP | | | QCVN 65:2013/BTTTT |
| | 57 ÷ 66 GHz | ≤ 10 W EIRP | | - Require to use the integrated antenna - Do not install in a fixed outdoor location | QCVN 88:2015/BTTTT |
| China | 2 400-2 483.5 | 20 dBm (e.i.r.p. for integrated antenna gain < 10 dBi) 27 dBm (e.i.r.p. for antenna gain ≥ 10 dBi) | 10 dBm/MHz (e.i.r.p. for Integrated antenna gain < 10 dBi) 17 dBm/MHz (e.i.r.p. for Integrated antenna gain ≥ 10 dBi) Frequency hopping ≤ 20dBm/100kHz | Interference Avoidance mechanism is mandatory Additional out of band emission limit applies in order to protect the service in the adjacent band and in specific bands. * | National regulation rules applied |
| | 5 150-5 350 | 23 dBm (e.i.r.p.) | 10 dBm/MHz (e.i.r.p.) | Indoor use only (use within vehicle is prohibited). 5 250-5 350 MHz, TPC and DFS are mandatory. Interference Avoidance mechanism is mandatory Additional out of band emission limit applies in order to protect the service in the adjacent band and in specific bands* | National regulation rules applied |
| | 5 725-5 850 | 33 dBm (e.i.r.p.) | 19 dBm/MHz (e.i.r.p.) | Interference Avoidance mechanism is mandatory Additional out of band emission limit applies in order to protect the service in the adjacent band and in specific bands* | National regulation rules applied |
| Korea | 5 925 ~ 7 125 MHz | 24 dBm | 2 dBm/MHz | LPI ¹⁾ (Indoor only) (LBT is required) 1) - allowed only the devices installed and operated by being connected to the power supply | Unlicensed Wireless Equipment Regulation Article No.7 |

| | | | | | |
|--|-------------------|--------|-----------|--|--|
| | | | | <p>within a building or the devices that communicate with these devices</p> <ul style="list-style-type: none"> - not allowed in moving objects, such as vehicles, aircraft, railways, ship, drones, etc. - applicable for only indoor usage. | |
| | 5 925 ~ 6 425 MHz | 14 dBm | 1 dBm/MHz | <p>VLP²⁾ (Indoor/Outdoor) (LBT is required) 2) - not allowed in a drone - devices built in vehicle are allowed in 6 085-6 425 MHz band only - applicable for both indoor and outdoor usage</p> | |
| | | 24 dBm | 2 dBm/MHz | <p>Subway³⁾ (Inside subway train only) (LBT is required) 3) - allowed only the devices installed and operated by being connected to the power supply within a subway train or the devices that communicate with these devices</p> | |
| | | | | | |

Please provide detailed information such as indoor/outdoor, DFS requirement in the “use condition” field.

Question 2: Is there any WAS/RLAN devices certification and labelling rules in your country and if so, what are these rules?

Answer:

| | |
|--------|--------------------------------------|
| Bhutan | Type Approval Rules and Regulations. |
|--------|--------------------------------------|

| | |
|-----------|--|
| | However, we do not require WLAN with low power devices to be Type Approved. |
| Nepal | Yes. WAS/RLAN devices shall be type approved by Nepal Telecommunications Authority. Only type approved equipment are allowed to be imported in Nepal. However, Type Approval Certificate is not an import license. |
| Thailand | A Supplier's Declaration of Conformity (SDoC) rule applies. |
| Japan | Yes, there are technical standards certification and labelling rules for WAS/RLAN equipment as follows: - Ordinance on Technical Standards Conformity Certification of Specified Radio Equipment (Ordinance of the Ministry of Posts and Telecommunications No. 37 of 1981); - Notice to define technical requirements for radio equipment of radio stations for low-power data communication systems (MIC Notice No. 48 of 2007, No.291 of 2022). |
| Malaysia | All communication devices (including WAS/RLAN devices) which are required to be certified shall be certified pursuant to Regulation 14 of the Communications and Multimedia (Technical Standards) Regulations 2000. Certified communication devices shall bear MCMC label to indicate that they comply with the standards and legal requirements enforced by MCMC. For details, please refer to: http://www.mcmc.gov.my/en/communications-equipment/certification-of-communications-equipment . |
| Australia | Yes, Australian labeling rules apply to most radiocommunications transmitters. All short range devices in Australia must be labelled to certify that they conform to applicable standard – the Radiocommunications (Short Range Devices) Standard 2014, which references AS/NZS 4268 (which, in turn, makes reference to other international standard for various device types). |
| Indonesia | All WAS/RLAN devices must be certified and labeled in accordance with the Regulation of the Minister of Communications and Informatics No. 16 of 2018. The testing parameters for certification shall refer to Director General of Resources Management and Equipment of Posts and Informatics (DG SDPPI) Regulation No.2 of 2019. |
| India | Yes, Equipment Type Approval. The procedure along with application for obtaining Equipment Type Approval is included in the relevant notification. https://dot.gov.in/spectrummanagement/license-exemption-5-ghz-gsr-1048e-dated-22102018 |
| Vietnam | There are some rules to certificate and label for WAS/RLAN device: -Firstly, EMC measurement is performed in a shielded room. Measurement results will be issued. -Secondly, If the measurement results meet the technical standards the device will get a declaration of conformity, a certification and a label (being specified in the circular No. 02/2022/TT-BTTTT). |
| China | Devices certification is required. See details at: https://ythzxfw.miit.gov.cn/lawGuide?data=e108714ad0804b5d8e9f2c8c09049875 |
| Korea | Public Notice on Conformity Assessment of Broadcasting and Communication Equipment, etc. Please see the relevant website https://www.rra.go.kr/en/cas/intro.do - In the Public Notice, Chapter 2 (Certification) includes Application for conformity certification (Article 5), Examination of conformity certification (Article 6), and Issuance of certificate of conformity (Article 7). - In the Public Notice above, Article 23 stipulates labelling rules. - Most RF (radio frequency) devices must be approved through the certification of conformity. For devices that may affect the radio environment, broadcast communications network, or the like, as well as devices whose normal operation is subject to possible interference from radio waves, the certificate of conformity can be applied for from the National Radio Research Agency (RRA) with the appropriate documentation. |

Question 3: What's the current utilization of existing WAS/RLAN spectrum bands by the WAS/RLAN in your country? Do you have any measures of the utilization of existing WAS/RLAN spectrum bands


Answer:

| Bhutan | ISM Band | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------|--|------------|------------|------------|----------------|---------------------------------|--|--|--|------|------|------|---------|--------------|--------|--------|--------|--------|------------|-------|-------|-------|-------|------------|---|----|-----|-----|-------|--------|--------|--------|--------|----------------|-------------------------------------|--|--|--|------|------|------|---------|--------------|------------|------------|------------|------------|
| Nepal | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Thailand | WAS/RLAN equipment is license exempted and can be used freely nationwide | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Japan | N/A. We are considering updating the information in AWG-32 or later. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Malaysia | Such information is not available. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Australia | Australia does not keep records of utilization of spectrum bands authorized for use by class licences, but utilization can be characterized as extensive. The ACMA does not directly measure utilization of these bands. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Indonesia | The current WAS/RLAN spectrum bands are utilized for access and backhauling as transport network. In the future, registration method for measuring the utilization of RLAN that used for outdoor (access/backhaul) will be developed. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| India | The utilization is for indoor and outdoor. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Vietnam | The designed bands for WAS/RLAN are widely utilized, with various type of application such as public/private Wi-Fi access, wifi direct, bluetooth, lp camera, remote control. In case of licence-exempted band, so far there is no report on the utilization of existing WAS/RLAN spectrum bands. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| China | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Korea | <p>The annual data for conformity assessment number of 2.4/5/6 GHz WAS/RLAN</p> <ul style="list-style-type: none"> - On average over 12 K devices, unlicensed devices such as WAS/RLAN in 2.4 GHz, 5 GHz and 6GHz band, are newly certified every year in Korea. And over 68 M devices were sold. <table border="1" data-bbox="315 1283 1412 1633"> <thead> <tr> <th rowspan="2">Frequency Band</th> <th colspan="4">The number of certified devices</th> </tr> <tr> <th>2020</th> <th>2021</th> <th>2022</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>2.4 GHz band</td> <td>10,800</td> <td>11,411</td> <td>11,733</td> <td>11,314</td> </tr> <tr> <td>5 GHz band</td> <td>1,371</td> <td>1,351</td> <td>1,487</td> <td>1,403</td> </tr> <tr> <td>6 GHz band</td> <td>1</td> <td>99</td> <td>396</td> <td>165</td> </tr> <tr> <td>Total</td> <td>12,172</td> <td>12,861</td> <td>13,616</td> <td>12,882</td> </tr> </tbody> </table> <p><i>Note : Multifunction devices such as smart phones, tablets, and lap-top PCs were excluded.</i></p> <table border="1" data-bbox="315 1690 1412 1862"> <thead> <tr> <th rowspan="2">Frequency Band</th> <th colspan="4">The number of WAS/RLAN devices sold</th> </tr> <tr> <th>2020</th> <th>2021</th> <th>2022</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>2.4 GHz band</td> <td>69,821,832</td> <td>58,102,434</td> <td>48,570,108</td> <td>58,831,491</td> </tr> </tbody> </table> | | | | Frequency Band | The number of certified devices | | | | 2020 | 2021 | 2022 | Average | 2.4 GHz band | 10,800 | 11,411 | 11,733 | 11,314 | 5 GHz band | 1,371 | 1,351 | 1,487 | 1,403 | 6 GHz band | 1 | 99 | 396 | 165 | Total | 12,172 | 12,861 | 13,616 | 12,882 | Frequency Band | The number of WAS/RLAN devices sold | | | | 2020 | 2021 | 2022 | Average | 2.4 GHz band | 69,821,832 | 58,102,434 | 48,570,108 | 58,831,491 |
| Frequency Band | The number of certified devices | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2020 | 2021 | 2022 | Average | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.4 GHz band | 10,800 | 11,411 | 11,733 | 11,314 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 GHz band | 1,371 | 1,351 | 1,487 | 1,403 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 GHz band | 1 | 99 | 396 | 165 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Total | 12,172 | 12,861 | 13,616 | 12,882 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Frequency Band | The number of WAS/RLAN devices sold | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2020 | 2021 | 2022 | Average | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.4 GHz band | 69,821,832 | 58,102,434 | 48,570,108 | 58,831,491 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| | | | | |
|------------|------------|------------|------------|------------|
| 5 GHz band | 16,600,906 | 7,972,220 | 4,747,660 | 9,773,595 |
| Total | 86,422,738 | 66,074,654 | 53,317,768 | 68,605,086 |

*Note: Multifunction devices such as smartphones, tablets, and laptop PCs were excluded.
The number of devices sold each year accounts for the sales of devices certified in the last 3 years prior to the sales, meaning 2020 sales indicate the sale of devices certified between 2017 and 2019.*

- Below is an example of measurement data for the utilization of WAS/RLAN channel in Seoul.

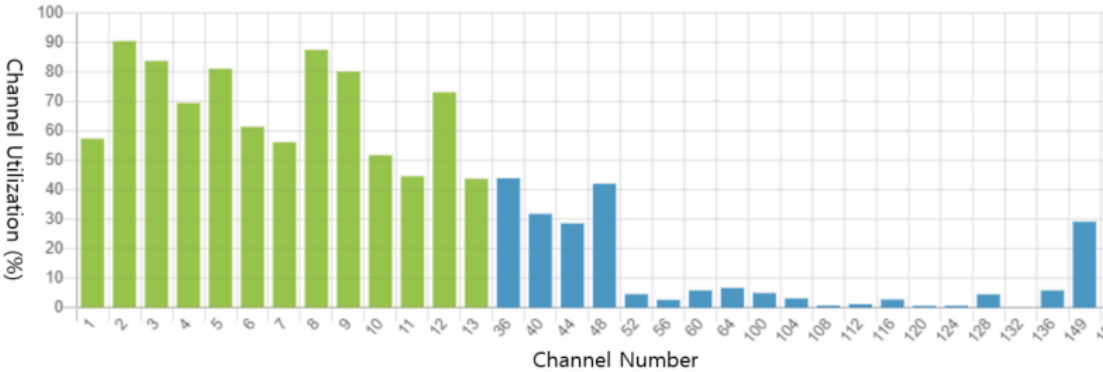

*Note: This is an example of Gangnam Subway Station between 11 AM and 12 PM on April 22, 2023. The channel utilization of 1, 5, 9, and 13 was over 90% for 3 hours a day on average.
The channel utilization of 36, 44, and 149 was over 50% for 7 hours a day on average.*

Question 4: What are the current fixed broadband technologies used in your country (e.g., Cable, Fiber, unlicensed or cellular based FWA, etc.), and what is the adoption rates for fixed broadband services (e.g., xDSL/ FTTx/FWA/satellite) in your country?

Answer:

| | |
|----------|--|
| Bhutan | Fixed Broadband Internet, Fixed Wireless Internet |
| Nepal | The current fixed broadband technologies used in Nepal are Cellular based FWA, Wi-Fi, FTTH, ADSL and Coaxial Cables. Current adoption rates: Cellular based FWA: NA Wireless: 0.23 % of total population FTTH/ Coaxial Cables: 36.13 % of total population ADSL: 1.09 % of total population |
| Thailand | xDSL, Cable Modem and FTTx are available |
| Japan | The adoption rate for fixed broadband technologies (as of March 31, 2021): - Fiber: 99.3% The number of subscribers (as of September 30, 2022): <Fixed broadband> total 44.3 million |

| | <p>FTTH: 37.33 million CATV: 6.42 million DSL: 0.54 million</p> | | | | | | | | | | | | |
|------------|--|------------|---------------------------------------|------|------|------|-----|-----|-----|-----------|-----|---------|-----|
| Malaysia | <p>The current fixed broadband technologies used in Malaysia includes fibre, copper and other technologies such as satellite, FWA and Gigawire. As of Q4 2022, the fixed broadband subscriptions in Malaysia stands at 4.22 million, with 47.6% penetration rate per 100 premises. The penetration rates of the fixed broadband services by technology are as follows:</p> <table border="1"> <thead> <tr> <th>Technology</th> <th>Penetration Rate per 100 premises (%)</th> </tr> </thead> <tbody> <tr> <td>FTTx</td> <td>46.5</td> </tr> <tr> <td>xDSL</td> <td>0.8</td> </tr> <tr> <td>FWA</td> <td>0.2</td> </tr> <tr> <td>Satellite</td> <td>0.1</td> </tr> <tr> <td>Others*</td> <td>0.1</td> </tr> </tbody> </table> <p>* Includes Ethernet and Gigawire</p> | Technology | Penetration Rate per 100 premises (%) | FTTx | 46.5 | xDSL | 0.8 | FWA | 0.2 | Satellite | 0.1 | Others* | 0.1 |
| Technology | Penetration Rate per 100 premises (%) | | | | | | | | | | | | |
| FTTx | 46.5 | | | | | | | | | | | | |
| xDSL | 0.8 | | | | | | | | | | | | |
| FWA | 0.2 | | | | | | | | | | | | |
| Satellite | 0.1 | | | | | | | | | | | | |
| Others* | 0.1 | | | | | | | | | | | | |
| Australia | <p>In Australia, 95% of broadband connections are delivered by the government-owned National Broadband Network (NBN Co.) Statistics collected by the competition regulator (ACCC) show that current fixed technologies include Fibre optic cable (Fibre optic includes fibre-to-the-curb (FTTC), fibre-to-the-basement (FTTB), fibre-to-the-node (FTTN) and fibre-to-the-premises (FTTP)), hybrid-fibre coaxial cable (HFC) and Fixed Wireless.</p> <p>Adoption rates of nbn services in June 2022 were: > FTTN: 35.5% > HFC: 23.3% > FTTP: 20.4% > FTTC: 12.8% > FTTB: 3.2% > FWA: 4.6%.</p> <p>Fixed wireless is also offered by commercial mobile network operators. Nbn has 400k fixed wireless customers, TPG and Optus reported a further 377,000 fixed wireless customers at December 31, 2022 (source: December quarter 2022 report ACCC).</p> | | | | | | | | | | | | |
| Indonesia | <p>Fixed broadband technologies used in Indonesia mostly based on fiber optic and satellite. Adoption rate for fixed broadband services (FTTx): Year 2021 : 17.23 % households Year 2022 : 22.91 % households Total household : 68,700,700 (data 2019)</p> | | | | | | | | | | | | |
| India | | | | | | | | | | | | | |
| Vietnam | <p>- CaTV (Internet over cable TV), xDSL, FTTH and cellular based FWA are the current fixed broadband technologies. - By the end of 2022, FTTx connection has been deployed to 100% of communes/wards/ townships, 91% of villages, 100% of schools, 72.4% of household (20 million houses).</p> | | | | | | | | | | | | |
| China | <p>Fixed networks(fiber) have gradually upgrade from 100 Mbit/s to 1000 Mbit/s. By the end of 2022, 15.23 million 10G PON ports with gigabit service capabilities have been built, nearly double the level of 2021. 110 cities across China have reached the gigabit city standard. By the end of 2022, China had 590 million fixed broadband access users, with a population penetration rate of 41.8 units per 100 people. https://www.miit.gov.cn/igsi/yxi/xxfb/art/2023/art_69798e71872c407ab677fd1c73885337.html</p> | | | | | | | | | | | | |
| Korea | <p>Fiber and FTTx are used as one of major technologies for fixed broadband.</p> | | | | | | | | | | | | |

Question 5: What is the average fixed broadband connection speed per connection (both residential premises and business/ enterprise premises) (e.g., xDSL/ FTTx /FWA/satellite) in your country?

Answer:

| Bhutan | The normal average leased line internet connections leased by general households is 2 to 4Mbps | | | | | | | | | | |
|------------------------------|--|---------------------------------|--|-----------|--|--------|----------------------------|-------------|---------------------------------|------------------------------|------------|
| Nepal | | | | | | | | | | | |
| Thailand | The average fixed broadband connection speed is approximately 100 Mbps. | | | | | | | | | | |
| Japan | N/A. We are considering updating the information in AWG-32 or later. | | | | | | | | | | |
| Malaysia | <table border="1"> <thead> <tr> <th>Indicator</th> <th>Download Speed (As of January 2023)</th> <th>Source</th> </tr> </thead> <tbody> <tr> <td>Mean fixed-broadband speed</td> <td>138.84 Mbps</td> <td rowspan="2">Ookla speedtest global index</td> </tr> <tr> <td>Median fixed-broadband speed</td> <td>92.69 Mbps</td> </tr> </tbody> </table> | | | Indicator | Download Speed (As of January 2023) | Source | Mean fixed-broadband speed | 138.84 Mbps | Ookla speedtest global index | Median fixed-broadband speed | 92.69 Mbps |
| Indicator | Download Speed (As of January 2023) | Source | | | | | | | | | |
| Mean fixed-broadband speed | 138.84 Mbps | Ookla speedtest global index | | | | | | | | | |
| Median fixed-broadband speed | 92.69 Mbps | | | | | | | | | | |
| Australia | <p>In Australia, 95% of broadband connections are delivered by the government-owned National Broadband Network (NBN Co.). There is also a significant enterprise market, but data on enterprise speeds and performance are not collected. Data is also not separately available for business premises.</p> <p>The following applies only to residential customers. nbn products are sold by speed, so consumers get whatever speed they select ranging from 12Mbps to 1Gbps. The following shows the average available speed and then the most popular product (ie: what speed plan the majority of customers are paying for).</p> <p>Statistics collected by the competition regulator show:</p> <ul style="list-style-type: none"> > The average speeds available for FTTP are 276 Mbps. > 46% of FTTP connections are on 50 Mbps > Average speed available for FTTC, FTTB, FTTN and HFC is 46.75 Mbps > 62% of these connections are on 50 Mbps > Average speed available on fixed wireless is 37.3 Mbps > 60% of connections are on 60 Mbps. | | | | | | | | | | |

| | |
|-----------|---|
| | Source: December quarter 2022 report ACCC |
| Indonesia | The average fixed broadband connection (FTTx) for downlink is 25.45 Mbps and the average uplink speed is 12.95 Mbps (Ookla, December 2022). |
| India | |
| Vietnam | In recent survey, it showed that average fixed broadband connection speed per connection in Viet Nam, depending on operators, are in the range from 50 Mbps to 100 Mbps. |
| China | 554 million fixed broadband users reached the access rate of 100 Mbit/s, accounting for 93.9% of broadband users. 91.75 million fixed broadband users reached the access rate of 1000 Mbit/s, accounting for 15.6%. The total bandwidth of fixed broadband users reaches 1993.3 million Gbit/s. The average subscribed bandwidth per household has reached 367.6 Mbit/s. https://www.miit.gov.cn/jgsj/yxj/xxfb/art/2023/art_69798e71872c407ab677fd1c73885337.html |
| Korea | 10 Gbps is the average speed for fixed broadband connection using FTTx. |

Question 6: Which WAS/RLAN technologies are used in your country, for example Wi-Fi, LTE-U, NR-U? And what are the use cases for these technologies?

Answer:

| | |
|-----------|--|
| Bhutan | Wi-Fi |
| Nepal | Wi-Fi is the only WAS/RLAN technology currently in use in Nepal. |
| Thailand | WiFi technology is used in 2.4 GHz and 5 GHz frequency bands. LTE-U technology is used in 5 GHz frequency band. |
| Japan | The technical standards have been established for WAS/RLAN technologies, and the use of any technology and its utilization for any use case are permitted as long as the above standards are followed. |
| Malaysia | As to date, Wi-Fi is the widely used technology for WAS/RLAN. Some of the use cases of WAS/RLAN include Internet Access, Mobile Device, Home Networking, Smart Home Device, Business Networking, Internet of Things (IOT) and Education. |
| Australia | As the vast majority of WAS/RLAN use in Australia is authorised under class licensing, and Australian regulations are also generally technology-neutral, so users are free to deploy any technology that meets applicable technical conditions. We therefore have no specific record of which technologies are deployed, or their use cases. |
| Indonesia | WAS/RLAN a. WiFi/RLAN : used for access and backhaul. |

| | |
|---------|--|
| | b. 5 GHz band (5150 – 5350 MHz and 5725 – 5825 MHz) opened for class-licensed IMT-based technology such as LAA |
| India | License exemption is technologies neutral. WAS/RLAN technologies use cases in India are predominantly for Home Broadband, Enterprise Broadband and Public Wifi hotspots |
| Vietnam | Up to now, WAS/RLAN technologies are used in Vietnam that has been just Wi-Fi. The use cases for this technology are public/private Wi-Fi access, wifi direct, bluetooth, Ip camera, remote control. |
| Korea | WiFi 6E is used for WAS/RLAN technologies and use cases are attached as Annex 1. |

Question 7: What is your country’s spectrum plan on the 6 GHz band for WAS/RLAN use?

Answer:

| | |
|-----------|---|
| Bhutan | We have not yet planned the 6GHz band for WAS/RLAN since it is explicitly used by the satellite services at the moment. In future, with the coming of WiFi-6, we may look into re-farming for WAS/RLAN. |
| Nepal | As the 6 GHz band is currently used for FS/FSS services, there is no immediate action plans related to the use of 6 GHz band for WAS/RLAN. At the moment, Nepal is monitoring the international developments in this topic. |
| Thailand | The equipment using the band 5.925-6.425 GHz is license exempted and can be used freely nationwide. (RLAN). The use of the band 6.425-7.125 GHz is planned to be considered after WRC-23. |
| Japan | The national regulation was revised to allow WLAN operations in the 5925-6425 MHz frequency band in September 2022. The 6425-7125 MHz frequency band is under consideration for future assignments. |
| Malaysia | Malaysia has made available the 5925 MHz to 6425 MHz frequency band for WAS/RLAN under the Class Assignment for Short-range Radiocommunication Device. Malaysia is currently monitoring the international development and studies of the 6 GHz band in view of any future considerations of the 6425 MHz to 7125 MHz frequency band. |
| Australia | The ACMA has authorised 2 classes of device in the 5925–6425 MHz (‘lower 6 GHz’) band. These two classes of device are often referred to as low power indoor (LPI) and very low power (VLP). The proposed power limits and restrictions specific to these classes are: <ul style="list-style-type: none"> • For LPI devices: <ul style="list-style-type: none"> maximum power 24 dBm EIRP maximum power density 11 dBm/MHz EIRP must operate indoors. • For VLP devices: <ul style="list-style-type: none"> maximum power 14 dBm EIRP maximum power density 1 dBm/MHz EIRP may operate in any location. |
| Indonesia | No definitive plan. |
| India | This is still under study and evaluation phase. |

| | |
|---------|---|
| Vietnam | Currently, there is no spectrum plan or regulation for the use of WAS/RLAN in the 6 GHz band. We are considering to allocate spectrum for RLAN and/or IMT in 6 GHz band, taking into account international trend and country need for the development of nation broadband infrastructure. |
| China | China will identify the band 6425-7125 MHz or portions thereof, for IMT in the new version of the Regulations on the Radio Frequency Allocation of China. Currently there's no plan to use 6GHz band for WAS/RLAN in China. |
| Korea | Since 2022, the frequency band 5 925-7 125 MHz has been opened for WAS including WiFi 6E with license-exempt usage, and WiFi 6E will be evolved to WiFi 7 after 2024. |

Question 8: What are the incumbent services and their frequency ranges in the 6 GHz band?

Answer:

| | Frequency Range | Incumbent services | Conditions |
|----------|---------------------|--|--|
| Bhutan | 6GHz | Satellite Services (VSAT) and Television Satellite | |
| Nepal | 5925 MHz - 6425 MHz | Fixed Point to Point Microwave Link | NA |
| | 6425 MHz - 6700 MHz | Fixed Satellite Services | NA |
| | 6425 MHz - 7125 MHz | Fixed Point to Point Microwave Link | subject to the co-ordination with FSS Allocation |
| Thailand | 5.925-6.425 GHz | Fixed-satellite service (Uplink) | |
| | 6.425-7.125 GHz | Fixed-satellite service (Uplink) and Fixed service | |
| Japan | 5 925-6 425 MHz | FIXED FIXED SATELLITE (Earth-to-space) | |

| | | | |
|-----------|----------------------------|--|--|
| | | MOBILE | Low-Power Data Transmission System shall be used |
| | 6 425-6 570 MHz | FIXED FIXED SATELLITE (Earth-to-space) MOBILE | |
| | 6 570-6 870 MHz | FIXED FIXED SATELLITE (Earth-to-space) | |
| | 6 870-7 075 MHz | FIXED FIXED SATELLITE (Earth-to-space) MOBILE | |
| | 7 075-7 125 MHz | FIXED MOBILE | |
| Malaysia | 5925 MHz to 7075 MHz | Fixed Satellite Service Earth Station (VSAT/Hub station) | <ul style="list-style-type: none"> Use by way of Apparatus Assignment (licensed apparatus) and Class Assignment* (Non-licensed apparatus). <p>For FSS use under the Class Assignment, the requirements and conditions are specified in Class Assignment for Fixed-Satellite Service Earth Station.</p> |
| | 5925 MHz to 7125 MHz | Fixed Service <ul style="list-style-type: none"> Microwave Link Outside Broadcast Microwave Link | <ul style="list-style-type: none"> Use by way of Apparatus Assignment (licensed apparatus). Fixed service operates on non-interference basis (NIB) to the earth stations of Fixed Satellite Service. <p>Other requirements/conditions are specified in the relevant documents which can be found at this URL:</p> <p>https://www.mcmc.gov.my/en/spectrum/standard-radio-system-plan-resources:</p> <ul style="list-style-type: none"> |
| | 5925 MHz to 6425 MHz | Short-range Radiocommunication Device (including WAS/RLAN) | <ul style="list-style-type: none"> Use by way of Class Assignment (Non-licensed apparatus) <p>1. The relevant requirements and conditions are specified in the Class Assignment for Short-range Radiocommunication Device (SRD) (please refer to the answers provided in Question 1 above).</p> |
| Australia | 5925 – 6425 MHz | Fixed Earth – 284 Point to Point links – 2179 Radiodetermination – 1 | |
| | 6425–7125 MHz | Fixed Earth – 23 Earth Receive – 9 Point to Point links – 2661 Radiodetermination – 7 | |
| Indonesia | 6 425 – 7 110 MHz | Fixed Wireless Point to Point (Microwave Link) | utilized service |

| | | | |
|---------|-------------------|--|---|
| | 5 925 – 6 725 MHz | Fixed Satellite Service | utilized service |
| | 6 725 – 7 025 MHz | Fixed Satellite Service | planned band |
| India | 5925-6425 MHz | Fixed Service (Point to Point links), FSS (E-to-s) | |
| | 6 425-6725 MHz | FSS (E-to-s) | |
| | 6725-7025 MHz | FSS (E-to-s), Fixed Service (Point to Point links) | |
| | 7025-7 125 MHz | Fixed Service (Point to Point links) | |
| Vietnam | 5925-6425 MHz | FIXED | RR. No. 5.457A 5.457B 5.149 5.440 5.458 |
| | | FIXED-SATELLITE (Earth-to-space) MOBILE | |
| | 6425-6700 MHz | FIXED FIXED-SATELLITE (Earth-to-space) MOBILE | RR. No. 5.457A 5.457B 5.149 5.440 5.458 |
| | 6700-7075 MHz | FIXED FIXED-SATELLITE (Earth-to-space) (space-to-Earth) MOBILE | RR. No. 5.441 5.458 5.458A 5.458B VTN16 VTN16 The following frequency bands are preferred for the use of systems in the Fixed-satellite service: 3400-3560 MHz (space-to-Earth direction) 6425-6725 MHz (Earth to Space) 10700-11700 MHz (space-to-Earth direction) 12750-13250 MHz (Earth to Space) |

| | | | |
|-------|---------------|---|--|
| | | | <p>13750-14000 MHz (Earth to Space)</p> <p>14250-14500 MHz (Earth to Space)</p> <p>Earth stations operating in the bands 3400-3560 MHz and 10700-11700 MHz must employ the receiver filters to reject out-of-band signals in accordance with the regulations specified by the Ministry of Information and Communications.</p> <p>Systems in other services operating in this band shall not cause harmful interference to and shall not be protected from harmful interference caused by systems in the Fixed-satellite service.</p> |
| | 7075-7110 MHz | <p>FIXED</p> <p>MOBILE</p> | RR. No. 5.458 |
| China | 5925-6700 MHz | <p>FIXED</p> <p>FIXED-SATELLITE (Earth-to-space) 5.457A</p> <p>MOBILE CHN38</p> <p>5.149 5.440 5.458 CHN12</p> <p>CHN18 CHN23</p> | |
| | 6700-7075 MHz | <p>FIXED</p> <p>FIXED-SATELLITE (Earth-to-space) (space-to-earth) 5.441</p> <p>MOBILE</p> <p>5.458 5.458A 5.458B</p> <p>CHN23</p> | |
| | 7075-7145 MHz | <p>FIXED</p> <p>MOBILE</p> <p>5.458 CHN23</p> | |

| | | | |
|-------|--|-------------------------|--|
| Korea | 6 425 ~ 6 605 MHz 6 765 ~ 6 945 MHz | Broadcasting (Fixed) | |
| | 6 605 ~ 6 765 MHz 6 945 ~ 7 125 MHz | Broadcasting (Mobile) | |
| | 5 925 ~ 6 425 MHz 6 430 ~ 7 110 MHz | M/W (Fixed) | |
| | 6 876 ~ 7 051.86 MHz | Satellite (Feeder link) | |

Question 9: Does your administration have a frequency assignment/license database system for the 6 GHz band? If there is such a database, is it open to public for 3rd coordination system to interact with? Please provide some details

Answer:


| | |
|-----------|---|
| Bhutan | N/A |
| Nepal | The assignment database is maintained for Fixed Satellite Service and Fixed Services (Microwave) separately. But such database is not publicly available. |
| Thailand | There is a frequency assignment/license database system, but it is not open to public. |
| Japan | Yes, we have a database system for all domestic radio stations, which is available on the MIC website. |
| Malaysia | The frequency bands assigned under the Apparatus Assignment are registered in MCMC's Spectrum Management System. Some information of frequency assignments (such as transmit/receive frequencies, assignment holders, location, etc.) are available in MCMC's website, which can be found at https://www.mcmc.gov.my/en/legal/registers/cma-registers . There is no frequency database system for short-range radiocommunication devices (including WAS/RLAN) under the Class Assignment. |
| Australia | Yes, publicly available and searchable database, the Register of Radiocommunications Licenses at https://web.acma.gov.au/rrl/register_search.main_page , however note that devices authorized by Class Licence do not appear on the register. The information on licensed services given in answer to question 8 is taken from this data. |
| Indonesia | Yes, there is license database for 6 GHz band existing usage. It is not open to public for 3 rd coordination system to interact with. |

| | |
|---------|---|
| India | There is a robust licensing and frequency assignment system in place. Yes, India does have frequency assignment/license database system for the frequency bands including 6 GHz band. Wireless Planning and Coordination Wing (WPC) is nodal agency to do any coordination. |
| Vietnam | Yes, the administration has. However, in current regulations, it is not open to public for 3rd coordination system to interact with. |
| China | Yes, there's database system. However, there's no plan to public the database for any 3rd system as it might bring risk. |
| Korea | The Republic of Korea has a frequency assignment/license database system for all radio stations including 6 GHz band and a plan to develop for 6 GHz frequency coordination system in near future. |

Annex 1 Korea’s detailed response to Question 6


Question 6: Which WAS/RLAN technologies are used in your country, for example Wi-Fi, LTE-U, NR-U? And what are the use cases for these technologies?

| Technology | Frequency | Use case | Remarks |
|------------|-----------|---|--|
| Wi-Fi 6(E) | 5/6 GHz | <p><Business Solution></p> <p>1) Wi-Fi 6E and AI robot-based smart solution for businesses*:</p> <p>Building a high-capacity, low-latency, and multi-connection environment with Wi-Fi 6E in small business, and executing automatic order taking, easy payment, serving, and checkout scenarios with AI serving robots.</p> <p>2) Customer service through CR code in business stores, based on Wi-Fi 6E*:</p> <p>Implementation of a Wi-Fi 6E service in small business stores that provides contactless services such as displaying menus, ordering, and payment to users who connect through a QR code. A big data collection platform is also implemented for marketing information targeting small businesses.</p> | <p>*The technology and service demonstration items are developed by small and medium-sized venture entrepreneurs with the support of the Korean government and the Korea Radio Promotion Association</p> |

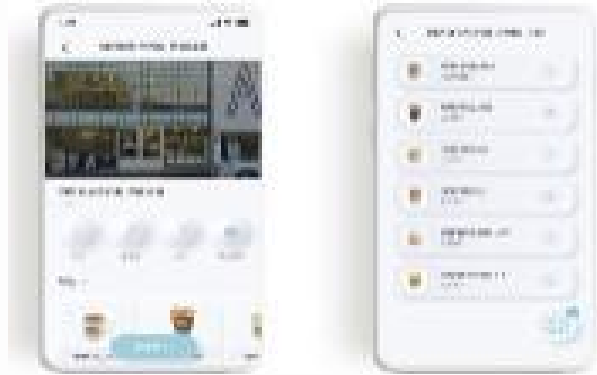

3) Logistics warehouse service using Wi-Fi 6E-based AMR (Auto Mobile Robot)*:

Demonstration of a smart logistics integrated management system by integrating a Wi-Fi 6E-based mesh configuration and an AMR (Auto Mobile Robot) based logistics management platform at an air logistics center.

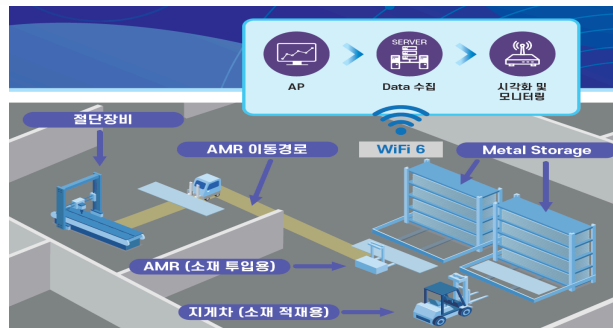

<Education and Learning>

1) Providing education and training services to the classroom using next-generation Wi-Fi 6E-based immersive contents*:

Real-time two-way online education program is created using VR contents based on Wi-Fi 6E, and a high-quality educational environment is established.



2) Realistic tour guide service using Wi-Fi 6E in exhibition and experience spaces *:

By using Wi-Fi 6E, real-time transmission of large 3D/VR immersive contents is served to two exhibition halls of the National Science Museum. Meta-verse experience services based on kiosks and Holo-lens 2 are provided.



<Navigation>

1) Wi-Fi 6E-based high-precision AR Navigation*:



Providing location-based AR navigation services to users who are connected to Wi-Fi 6E at a distance by combining visual positioning system (VPS) data with AR content.



<Streaming Service>

1) Seamless data roaming service with 6GHz Wi-Fi technologies*:

At the outdoor gates of Airport, it is possible to connect to a 6 GHz Wi-Fi network using a smartphone while moving around. By utilizing roaming and mesh networking capabilities, it is


possible to maintain Wi-Fi service and enable video calls and streaming of 4K-quality video content..



2) Non-face-to-face sports relay service using AI and Wi-Fi*:

Utilization of AI and Wi-Fi 6 GHz for contactless sports broadcasting services.

Simultaneous live broadcasting of sports games through AI cameras, transmitting two types of video in FHD and panorama to provide the game footage to both the stadium audience and viewers.

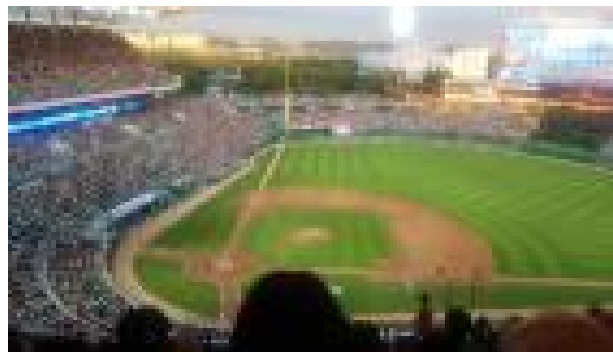

3) 8K level interactive service using 6GHz band*:


Real-time streaming service of VR contents featuring world natural heritage sites for visitors of a

VR theme park in a botanical garden, accessed through an Android-compatible 8K VR player app.



4) Watching local broadcast channels provided through terrestrial ATSC 3.0 on-vehicle using Wi-Fi 6E. *:

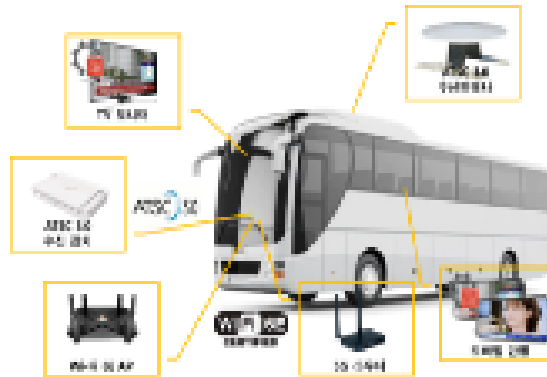

Demonstration of free UHD broadcast service through mobile devices by receiving multi-channel UHD terrestrial broadcasting on a moving bus, converting and transmitting it through Wi-Fi 6E.



<Performance test>

1) Performance comparison experience and visualization between existing Wi-Fi and Wi-Fi 6E*.

Verification and visualization of performance comparison, such as actual measured speed, between LTE, 5G, Wi-Fi 5/6/6E.

| | | | |
|-------|--------|--|--|
| | |  <p>2) Wi-Fi 6E outdoor MESH network*. Validation of stable internet service by constructing a</p>  <p>mesh network using 9 or more Wi-Fi 6E access points as multi-nodes in public places, and verifying and comparing network performance based on signal strength.</p> | |
| LTE-U | 5GHz | <p>1) Public Wi-Fi offloading for data traffic from public Wi-Fi networks to LTE-U networks</p> <p>2) Mobile video for providing high-quality mobile streaming video and live video</p> <p>3) Internet of Things (IoT) for providing wireless connectivity to IoT devices</p> <p>4) Emergency services for providing wireless connectivity to emergency services for police, fire, and medical services</p> | |
| NR-U | 5/6GHz | Not yet | |

